


[illegible]

SUBMITTAL: REVIEW NOT FOR CONSTRUCTION

SEVIER
COUNTY
SHEET NO. C-102

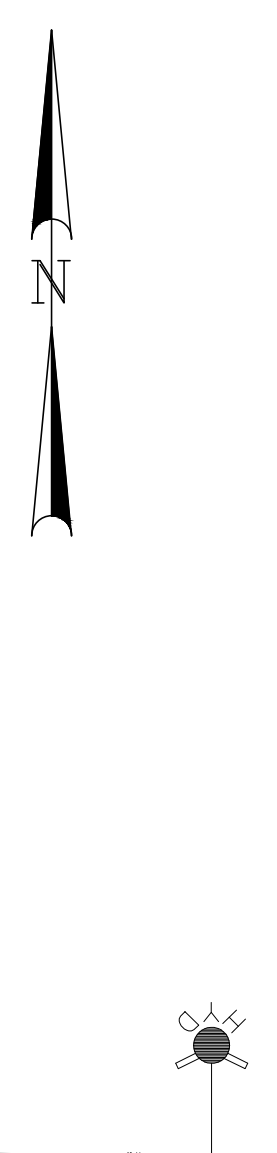



SITE PLAN					
ITEM	DESCRIPTION	DETAIL (AS REQ.)	SPEC (AS REQ.)	UNITS	TOTAL QUANTITY
02.00	EXISTING CONDITIONS				
02.13	RELOCATE SIGN		02 41 13	EA	8
03.00	CONCRETE				
03.04	PRECAST CONCRETE BLOCK WALL (PER SF OF WALL FACE), INCL EXCAVATION, GEOFABRIC.		03 30 00	SF	220
10.00	SPECIALTIES				
10.01	STOP SIGN, INCL. BASE AND POST		10 14 53	EA	2
10.05	NO PARKING ANY TIME SIGN, INCL. BASE AND POST		10 14 53	EA	12
10.08	ACCESSIBLE PARKING SIGN, INCL. BASE AND POST		10 14 53	EA	4
31.00	EARTHWORK				
31.10	SITE GRADING, INCL. EXCAVATION AND RECOMPACTION		31 23 13	CY	N/A
31.13	ROADWAY EXCAVATION, INCL. BACKFILL AND COMPACTION		31 23 16	CY	5575
32.00	EXTERIOR IMPROVEMENTS				
32.03	6-FT CONCRETE SIDEWALK, INCL. 4-IN. CONCRETE FLATWORK, UNTREATED BASE COURSE AND COMPACTED SUBGRADE		32 16 00	SY	880
32.05	CONCRETE DRIVEWAY, INCL. 7-IN. CONCRETE FLATWORK, UNTREATED BASE COURSE AND COMPACTED SUBGRADE		32 16 00	SY	355
32.10	30-IN TYPE B1 CURB AND GUTTER		32 16 00	LF	1379
32.11	30-IN TYPE B1 REVERSE CURB AND GUTTER		32 16 00	LF	842
32.12	30-IN "DEPRESSED" CURB AND GUTTER		32 16 00	LF	N/A
32.20	CURB & GUTTER TAPERED END		32 16 00	EA	N/A
32.32.01	PERPENDICULAR CURB RAMP - TYPE 1		32 16 00	SY	1
32.32.02	PERPENDICULAR CURB RAMP - TYPE 2		32 16 00	SY	1
32.33	CORNER CURB RAMP		32 16 00	SY	4
32.35	DETECTABLE WARNING SURFACE		32 16 00	EA	11
32.41	12-IN. GRANULAR BORROW		32 11 16	SY	2075
32.42	6-IN. UNTREATED BASE COURSE		32 11 23	SY	1170
32.45	3-IN HMA (1/2-IN. MIX) PAVEMENT		32 12 16	TON	1239
32.60	4-IN. PAVEMENT MARKING PAINT - HATCHING, INCL. ACCESSIBLE HATCHING		32 17 23	LF	200
32.62	PAVEMENT MESSAGE PAINT (12" STOP BAR), PAINTED WHITE		32 17 23	EA	5
32.63	PAVEMENT MESSAGE PAINT (ACCESSIBLE PARKING)		32 17 23	EA	4
32.64	4-IN. PAVEMENT MARKING PAINT - STALLS, PAINTED WHITE		32 17 23	LF	1676
32.67	CURBING PAINT, PAINTED RED		32 17 23	LF	1320
32.75	LOG RAIL, FENCE (2 RAIL), INCL. CONCRETE BASE			LF	440
32.85	LANDSCAPE ROCK, 3-IN THICK, INCL. GEOTEXTILE - DRAINAGE			SY	3615
33.00	UTILITIES				
33.16	RECONSTRUCT VALVE BOX AND RAISE EXISTING COVER, INCL. 12-IN. CONCRETE COLLAR			EA	3
33.32	RECONSTRUCT AND RAISE EXISTING FRAME AND COVER, INCL. 60-IN. CONCRETE COLLAR		33 05 61	EA	4
33.46.05	10-IN. HDPE STORM DRAIN PIPE, INCL. TRENCHING AND BACKFILLING		33 42 11	LF	12
33.46.06	12-IN. HDPE STORM DRAIN PIPE, INCL. TRENCHING AND BACKFILLING		33 42 11	LF	20
33.53	CURB INLET CATCH BASIN, INCL. CONNECTING AND GROUTING PIPE, HOOD AND GRATE		33 42 33	EA	1
33.56	UNDERGROUND STORM DRAIN DETENTION SYSTEM		N/A	EA	1
33.57	STORM DRAIN DETENTION OUTLET STRUCTURE		33 42 33	EA	1

[illegible]

SITE PLAN

SUBMITTAL: REVIEW NOT FOR CONSTRUCTION PROJECT NUMBER: 2308-017

SHEET NO. C-203

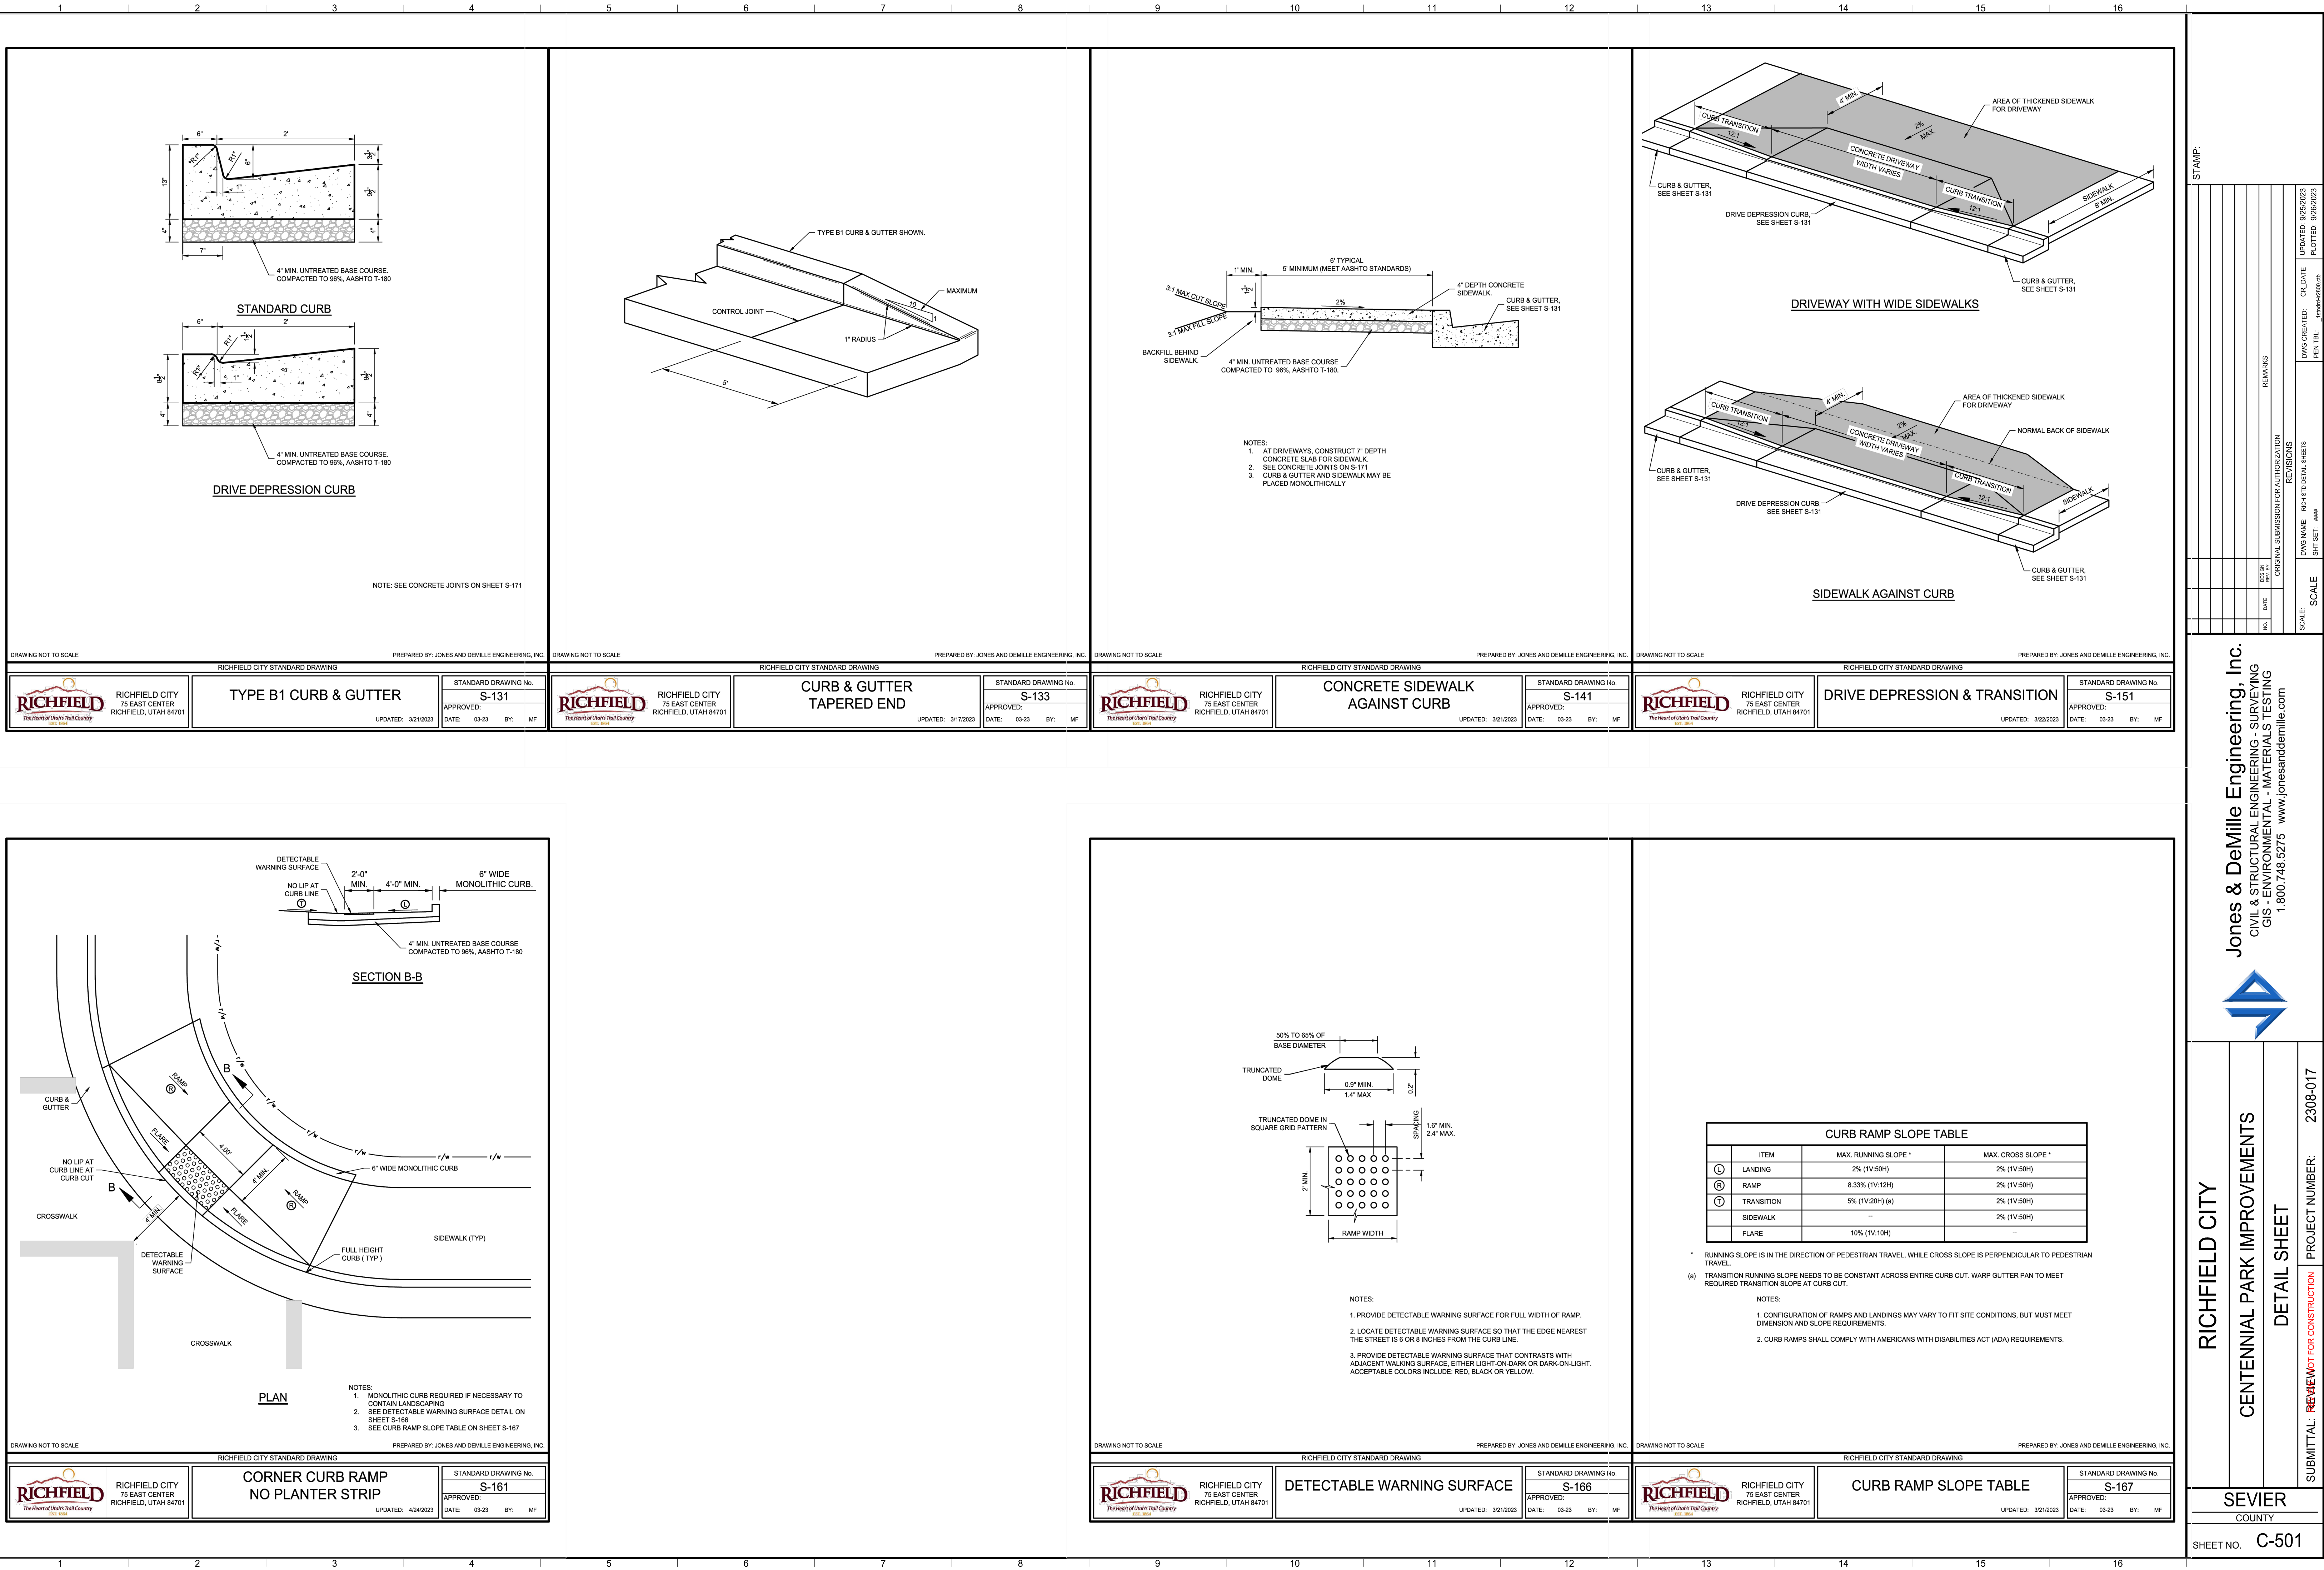

RICHFIELD CITY
CENTENNIAL PARK IMPROVEMENTS
DETAIL SHEET

SEVIER
COUNTY

SHEET NO. C-501

SUBMITTAL: REVIEWED FOR CONSTRUCTION PROJECT NUMBER: 2308-017

