


2024 South Salt Lake Storm Water Projects

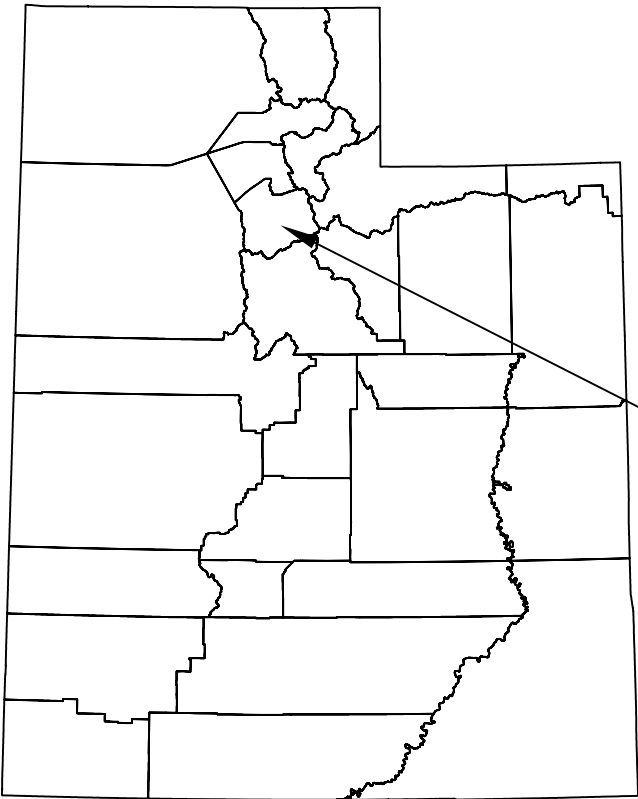

Project Location

Contact:
Chris Merket
South Salt Lake City
Engineer
cmerket@sslc.gov
385-341-0412

Corby Talbot
South Salt Lake City
Stormwater Division Manager
ctalbot@sslc.gov
385-315-4377

Know what's below.
Call **811** before you dig.



BLUE STAKES OF UTAH
UTILITY NOTIFICATION CENTER, INC.
www.bluestakes.org
1-800-662-4111

					DRAWN BY	SHELBEY BREWER	 220 E MORRIS AVENUE SOUTH SALT LAKE CITY, UT 84115	2024 STORM WATER PROJECTS	COVER PAGE	SHEET C 0.0 DATE AUGUST 10, 2023
					CHECKED BY	--				
					SCALE	1:1				
					DATE	2023-08-10				
	NO.	AUTHORIZED BY	REVISION	MADE BY	DATE					

PROPOSED STORM DRAIN
EXISTING STORM DRAIN
EXISTING SANITARY SEWER
EXISTING WATER
PROPOSED STORM BOX
EXISTING STORM BOX
EXISTING SEWER MANHOLE

- 0.0 COVER PAGE
- 0.1 LEGEND AND INDEX OF DRAWINGS
- 0.2 GENERAL NOTES
- 1.0 SHEET LOCATION MAP
 - 1.1 900 W 2700 S
 - 1.2 300 W CROSSROAD SQUARE
 - 1.3 300 W 2855 S
 - 1.4 300 W 2975 S
 - 1.5 300 W 2975 S
 - 1.6 300 W 3121S
 - 1.7 300 W 3195 S
 - 1.8 2500 S MAIN ST.
 - 1.9 300 E WENTWORTH AVE.
 - 1.10 2700 S 264 E
 - 1.11 200 E SUNSET AVE
- 4.1 DETAIL 309.2
- 4.2 DETAIL 315.1
- 4.3 DETAIL 316.1
- 4.4 DETAIL 331.4
- 4.5 EXISTING BOX DIMENSIONS

					DRAWN BY SHELBEY BREWER	
						
						CHECKED BY ---
						SCALE 1:1
						DATE 2023-08-10
NO.	AUTHORIZED BY	REVISION	MADE BY	DATE		



220 E MORRIS AVENUE
SOUTH SALT LAKE CITY, UT 84115

2024 STORM WATER PROJECTS

LEGEND AND INDEX OF DRAWINGS

SHEET

C 0.1

DATE _____

AUGUST 10, 2023

GENERAL NOTES

1.

ALL MATERIALS, WORKMANSHIP, AND CONSTRUCTION OF SITE IMPROVEMENTS SHALL MEET OR EXCEED THE LATEST EDITION OF THE MANUAL OF STANDARD PLANS AND MANUAL OF STANDARDS SPECIFICATIONS PREPARED BY THE UTAH CHAPTER OF THE AMERICAN PUBLIC WORKS ASSOCIATION UNLESS OTHERWISE NOTED. SUPPLEMENTAL SPECS REPLACE APWA SPECIFICATIONS AND APPLICABLE STATE AND FEDERAL REGULATIONS. WHERE THERE IS CONFLICT BETWEEN THESE PLANS AND SPECIFICATIONS, OR ANY APPLICABLE STANDARDS, THE HIGHER QUALITY STANDARDS SHALL APPLY. ALL WORK WITHIN PUBLIC R.O.W. OR EASEMENTS SHALL BE INSPECTED AND APPROVED BY THE SOUTH SALT LAKE ENGINEERING INSPECTOR AND THE DEPARTMENT OF TRANSPORTATION INSPECTOR.

2.

THE CONTRACTOR IS SPECIFICALLY CAUTIONED THAT THE LOCATION AND/OR ELEVATION OF EXISTING UTILITIES, AS SHOWN ON THESE PLANS, IS BASED ON RECORDS OF THE VARIOUS UTILITY COMPANIES AND, WHERE POSSIBLE, MEASUREMENTS TAKEN IN THE FIELD. THE INFORMATION IS NOT TO BE RELIED UPON AS BEING EXACT OF COMPLETE. THE CONTRACTOR MUST CALL THE LOCAL UTILITY LOCATION CENTER AT LEAST 48 HOURS BEFORE ANY EXCAVATION TO REQUEST EXACT FIELD LOCATION OF THE UTILITIES. PRIOR TO CONSTRUCTION, THE CONTRACTOR SHALL VERIFY PERTINENT LOCATIONS AND ELEVATIONS. ESPECIALLY AT THE CONNECTION POINTS AND AT POTENTIAL UTILITY CONFLICTS. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO RELOCATE ALL EXISTING UTILITIES THAT CONFLICT WITH THE PROPOSED IMPROVEMENTS SHOWN ON THESE PLANS.

3.

THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS FROM ALL APPLICABLE AGENCIES. THE CONTRACTOR SHALL NOTIFY THE CITY OF SOUTH SALT LAKE ENGINEERING INSPECTOR AT LEAST 48 HOURS PRIOR TO THE START OF ANY EARTH DISTURBING ACTIVITY, OR CONSTRUCTION ON ANY AND ALL PUBLIC IMPROVEMENTS.

4.

THE CONTRACTOR SHALL HAVE ONE (1) SIGNED COPY OF THE APPROVED PLANS, ONE (1) COPY OF THE APPROPRIATE STANDARDS AND SPECIFICATIONS, AND A COPY OF ANY PERMITS AND EXTENSION AGREEMENTS NEEDED FOR THE JOB ON-SITE AT ALL TIMES.

5.

THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL ASPECTS OF SAFETY INCLUDING, BUT NOT LIMITED TO, EXCAVATION, TRENCHING, SHORING, TRAFFIC CONTROL , AND SECURITY.

6.

IF DURING THE CONSTRUCTION PROCESS CONDITIONS ARE ENCOUNTERED BY THE CONTRACTOR, ITS SUBCONTRACTORS, OR OTHER AFFECTED PARTIES, WHICH COULD INDICATE A SITUATION THAT IS NOT IDENTIFIED IN THE PLANS OR SPECIFICATIONS, THE CONTRACTOR SHALL CONTACT THE ENGINEER IMMEDIATELY.

7.

ALL REFERENCES TO ANY PUBLISHED STANDARDS SHALL REFER TO THE LATEST REVISION OF SAID STANDARD, UNLESS SPECIFICALLY STATED OTHERWISE.

8.

THE CONTRACTOR SHALL SUBMIT A TRAFFIC CONTROL PLAN, IN ACCORDANCE WITH THE MUTCD TO THE APPROPRIATE RIGHT-OF-WAY AUTHORITY (CITY, COUNTY, OR STATE) FOR APPROVAL PRIOR TO ANY CONSTRUCTION ACTIVITIES WITHIN, OR AFFECTING, THE RIGHT-OF-WAY. THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING ANY AND ALL TRAFFIC CONTROL DEVICES AS MAY BE REQUIRED BY THE CONSTRUCTION ACTIVITIES.

9.

THE CONTRACTOR IS RESPONSIBLE FOR PROVIDING ALL LABOR AND MATERIALS NECESSARY FOR THE COMPLETION OF THE INTENDED IMPROVEMENTS SHOWN ON THESE DRAWING OR DESIGNATED TO BE PROVIDED, INSTALLED, CONSTRUCTED, REMOVED AND RELOCATED UNLESS SPECIFICALLY NOTED OTHERWISE.

10.

THE CONTRACTOR SHALL BE RESPONSIBLE FOR KEEPING ROADWAYS FREE AND CLEAR OF ALL CONSTRUCTION DEBRIS AND DIRT TRACKED FROM THE SITE.

11.

DIMENSIONS FOR LAYOUT AND CONSTRUCTION ARE NOT TO BE SCALED FROM ANY DRAWING. IF PERTINENT DIMENSIONS ARE NOT SHOWN, CONTACT THE CONSULTANT ENGINEER FOR CLARIFICATION, AND ANNOTATE THE DIMENSION ON THE AS-BUILT RECORD DRAWINGS.

12.

ALL STRUCTURAL EROSION CONTROL MEASURES SHALL BE INSTALLED AT THE

LIMITS OF CONSTRUCTION, PRIOR TO ANY OTHER GROUND-DISTURBING ACTIVITY. ALL EROSION CONTROL MEASURES SHALL BE MAINTAINED IN GOOD REPAIR BY THE CONTRACTOR, UNTIL SUCH TIME AS THE ENTIRE DISTURBED AREAS ARE STABILIZED WITH HARD SURFACE OR LANDSCAPING.

13.

THE CONTRACTOR SHALL SEQUENCE INSTALLATION OF UTILITIES IN SUCH A MANNER AS TO MINIMIZE POTENTIAL UTILITY CONFLICTS. IN GENERAL, STORM SEWER AND SANITARY SEWER SHOULD BE CONSTRUCTED PRIOR TO INSTALLATION OF WATER LINES AND DRY UTILITIES.

14.

ALL OPERATIONS CONDUCTED ON THE PREMISES, INCLUDING THE WARMING UP, REPAIR, APPROVAL, DEPARTURE OR RUNNING OF TRUCKS, EARTH MOVING EQUIPMENT, CONSTRUCTION EQUIPMENT AND ANY OTHER ASSOCIATED EQUIPMENT SHALL GENERALLY BE LIMITED TO THE PERIOD BETWEEN 7:00 AM AND 10:00 PM EVERYDAY UNLESS OTHERWISE APPROVED BY THE CITY AND THE SALT LAKE COUNTY DEPARTMENT OF HEALTH.

15.

IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO COORDINATE ALL UTILITY RELOCATIONS CONSISTENT WITH THE CONTRACTOR'S SCHEDULE FOR THIS PROJECT, WHETHER SHOWN OR NOT SHOWN AS IT RELATES TO THE CONSTRUCTION ACTIVITIES CONTEMPLATED IN THESE PLANS.

16.

THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL TEMPORARY POWER, TELEPHONE, AND WATER TO THE SITE, PAYING ALL FEES EXCLUDING TAP FEES AND SYSTEM DEVELOPMENT FEES, REFERRING TO ARCHITECTURAL PLANS FOR THE EXACT LOCATION AND DIMENSIONS OF BUILDING EXITS, RAMPS, TRUCK DOCKS, AND UTILITY ENTRANCE LOCATIONS.

17.

THE CONTRACTOR SHALL REFER TO ARCHITECTURAL PLANS FOR EXACT LOCATIONS AND DIMENSIONS OF VESTIBULE, SLOPE PAVING, EXIT PORCHES, RAMPS AND TRUCK DOCKS, PRECISE BUILDING DIMENSIONS AND EXACT UTILITY ENTRANCE LOCATIONS.

18.

CONTRACTOR TO MAINTAIN ALL SHRUB AND GROUND COVER AREAS FREE FROM WEEDS AND UNDESIRABLE VEGETATION THROUGH MAINTENANCE PERIOD.

19.

THE CONTRACTOR SHALL INSTALL BEST MANAGEMENT PLANS (BMPS) AND SUBMIT A BMP SITE PLAN TO THE CITY OF SOUTH SALT LAKE PRIOR TO COMMENCING CONSTRUCTION AND CONFORM TO THE EROSION CONTROL GENERAL NOTES.

STRUCTURAL NOTES

1.

THE SPECIFICATIONS AND REQUIREMENTS LISTED ON THIS SHEET ARE INTENDED AS A BASIC SUMMARY OF THE MATERIAL CONSTRUCTION AND INSPECTION REQUIREMENTS FOR THIS PROJECT, AS INCLUDED IN THE PROJECT SPECIFICATIONS. ADDITIONAL AND POSSIBLY MORE STRINGENT REQUIREMENTS ARE GIVEN IN THOSE SPECIFICATIONS. IN THE EVENT OF A CONFLICT BETWEEN THESE GENERAL NOTES AND THE REQUIREMENTS GIVEN IN THE PROJECT SPECIFICATIONS, THE PROJECT SPECIFICATIONS GOVERN.

2.

DESIGN DETAILS AS SHOWN ON THE DRAWINGS ARE INTENDED TO BE TYPICAL AND APPLY TO ALL SIMILAR SITUATIONS OCCURRING ON THE PROJECT, WHETHER OR NOT THEY ARE SPECIFICALLY REFERENCED IN EACH LOCATION. CONSULT THE ENGINEER FOR CONCURRENCE PRIOR TO CONSTRUCTION.

CONCRETE

1.

ALL CONCRETE CONSTRUCTION TO CONFORM TO ACI 316-14 "BUILDING CODE REQUIREMENTS FOR STRUCTURAL CONCRETE".

2.

REINFORCED CONCRETE 28-DAY COMPRESSIVE STRENGTH SHALL MEET REQUIREMENTS BELOW, UNLESS NOTED OTHERWISE:

CONCRETE: 4,000 PSI

3.

USE CEMENT CONFORMING TO ASTM C150, TYPE V, LOW ALKALI.

4.

SAW CUT JOINTS: SAW JOINTS BEFORE UNCONTROLLED SHRINKAGE CRACKING OCCURS. DO NOT TEAR OR RAVEL CONCRETE DURING SAWING.

5.

CONCRETE FINISHERS SHALL BE ACI CERTIFIED.

STEEL REINFORCEMENT

1.

PROVIDE STEEL REINFORCEMENT CONFORMING TO ASTM AC615 GRADE 60

2.

PROVIDE 24" LAP SPLICE U.N.O.

3.

CONCRETE COVER SHALL BE THE CLEAR DISTANCE BETWEEN REBAR AND CONCRETE SURFACE:

PROVIDE THE FOLLOWING CONCRETE COVER:

CAST AGAINST AND PERMANENTLY IN CONTACT WITH GROUND:

3 INCHES

EXPOSED TO WEATHER OR IN CONTACT WITH GROUND:

#6 THROUGH #18 BARS

2 INCHES

#5 BAR AND SMALLER

1 ½ INCHES

NOT EXPOSED TO WEATHER OR IN CONTACT WITH GROUND:

#11 BAR AND SMALLER

¾ INCHES

OTHER

1 ½ INCHES

FORMWORK, SHORING, AND BRACING

1.

CONFORM TO ACI 347 "RECOMMENDED PRACTICE FOR CONCRETE FORMWORK" FOR DESIGN AND CONSTRUCTION OF CONCRETE FORMWORK AND BRACING. CONTRACTOR IS RESPONSIBLE FOR DESIGN AND CONSTRUCTION OF FORMWORK AND BRACING.

2.

STRUCTURES AS SHOWN ON THESE PLANS DRAWINGS INDICATE THE FINAL CONDITION ONLY AND DO NOT INCLUDE THE NECESSARY COMPONENTS OR EQUIPMENT FOR STRUCTURAL STABILITY DURING CONSTRUCTION. CONTRACTOR IS RESPONSIBLE FOR WORK RELATED TO CONSTRUCTION ERECTION METHODS, BRACING, SHORING, RIGGING, GUYS, SCAFFOLDING, FORMWORK, AND OTHER WORK AIDS REQUIRED TO SAFELY PERFORM THE WORK SHOWN.

SPECIAL INSPECTION AND MATERIALS TESTING

1.

CONTINUOUS SPECIAL INSPECTION IS REQUIRED FOR POST-INSTALLED ANCHORS IN ACCORDANCE WITH SECTION 1705.1.1 AND TABLE 1705.3 OF THE 2018. INTERNATIONAL BUILDING CODE (IBC).

2.

MATERIALS TESTING SHALL CONFORM TO PLAN AND 2017 EDITION MANUAL OF STANDARD SPECIFICATIONS PUBLISHED BY UTAH SECTION OF THE AMERICAN PUBLIC WORKS ASSOCIATION AND RELATED ASTM TESTING STANDARDS. WHEN THERE IS A CONFLICT, THE MORE STRICT STANDARD SHALL BE USE.

GRADING

1.

CONTRACTOR TO VERIFY EXISTING GRADING

2.

FINISH GRADE MATCH EXISTING

POST-INSTALLED ANCHOR

1.

HILTI-HY 200-A SHALL BE USED AS THE EPOXY MATERIAL FOR POST-INSTALLED ANCHORS. ANCHORS SHALL BE INSTALLED AT AN AMBIENT TEMPERATURE ABOVE 41°

	△					DRAWN BY	SHELBEY BREWER
	△					CHECKED BY	---
	△					SCALE	1:1
	△					DATE	2023-08-10
NO.	AUTHORIZED BY	REVISION	MADE BY	DATE			

SOUTH SALT LAKE

ENGINEERING

DEPARTMENT

220 E MORRIS AVENUE

SOUTH SALT LAKE CITY, UT 84115

2024 STORM WATER

PROJECTS


GENERAL NOTES

SHEET

C 0.2

DATE

AUGUST 10, 2023

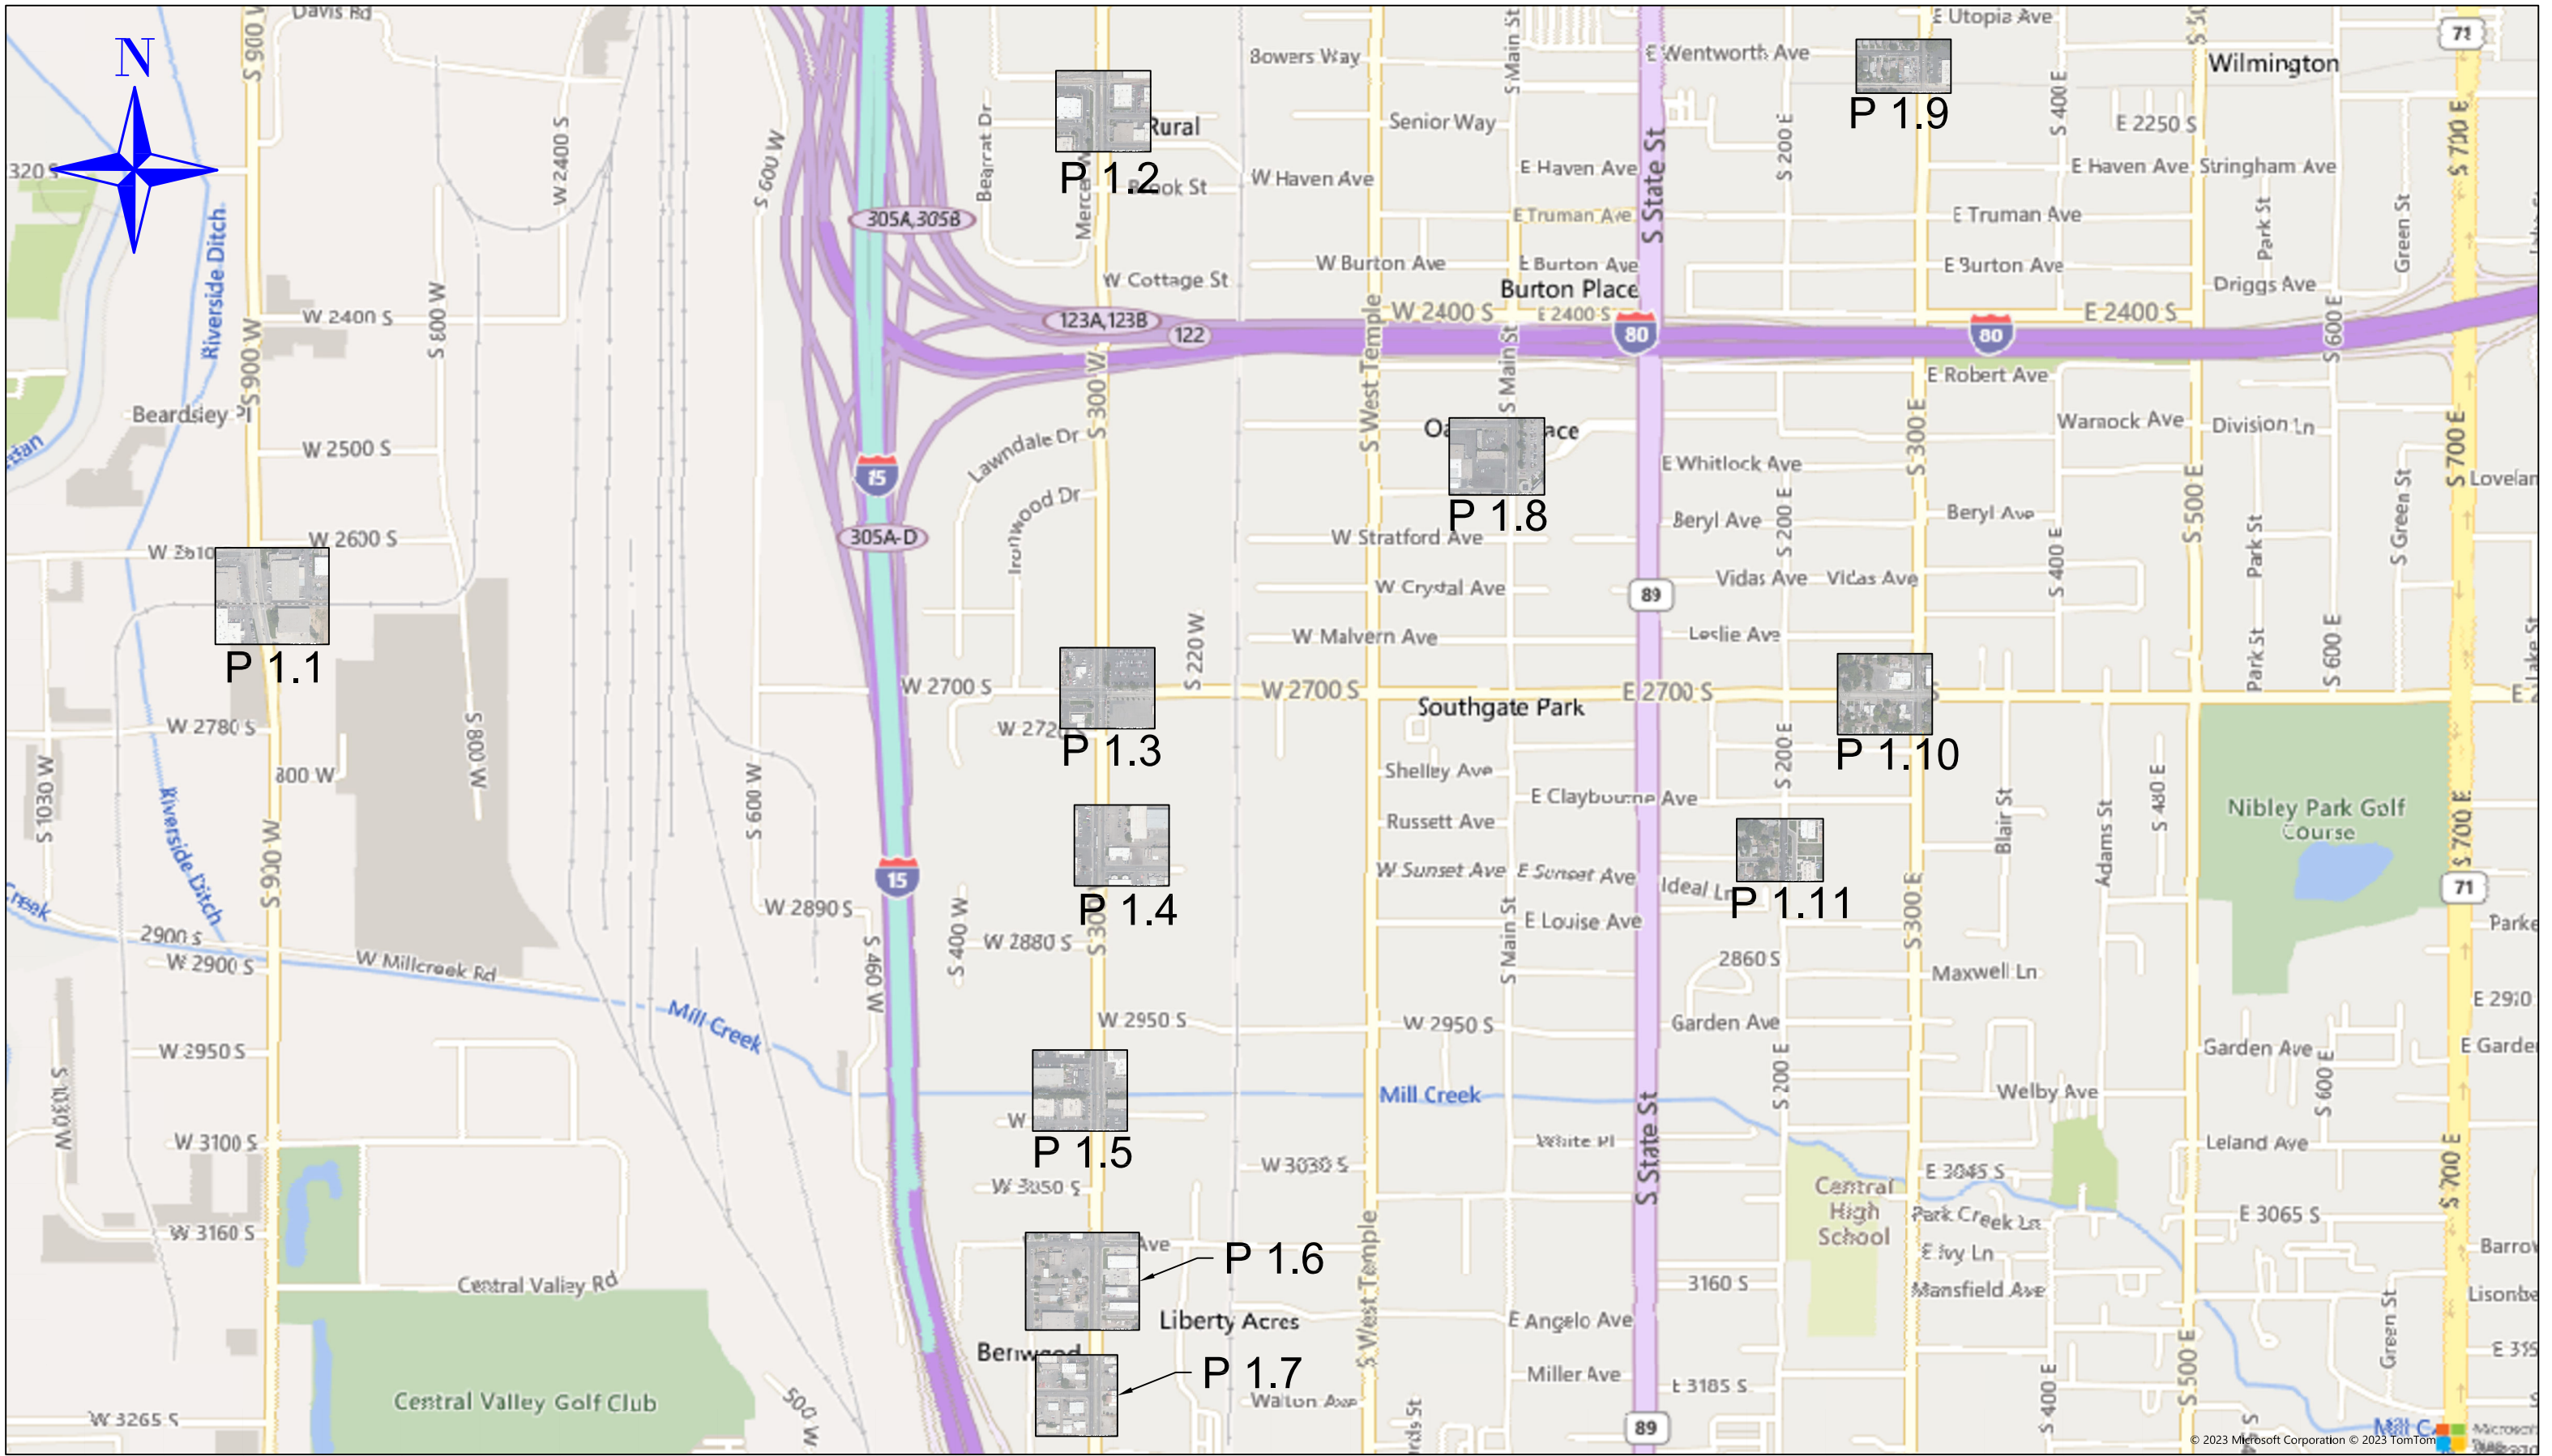

△					
△					
△					
△					
△					
NO.	AUTHORIZED BY	REVISION	MADE BY	DATE	

DRAWN BY
SHELBEY BREWER

CHECKED BY
—

SCALE
1:1

DATE
2023-08-10



2024 STORM WATER
PROJECTS

SHEET LOCATION
MAP

SHEET
C 1.0
DATE
AUGUST 10, 2023



Construction Notes

- 1 REMOVE RECTANGULAR LID, REPLACE WITH MANHOLE LID. CONFORM TO SSL PLAN 331.4. PRESERVE EXISTING BOX.

△					DRAWN BY	SHELBEY BREWER
△					CHECKED BY	—
△					SCALE	1:1
△					DATE	2023-08-10
NO.	AUTHORIZED BY	REVISION	MADE BY	DATE		



SOUTH SALT LAKE
ENGINEERING
DEPARTMENT

220 E MORRIS AVENUE
SOUTH SALT LAKE CITY, UT 84115

2024 STORM WATER PROJECTS

900 W 2700 S

SHEET

C 1.1

DATE

AUGUST 10, 2023



Construction Notes

- 1

REMOVE RECTANGULAR LID, REPLACE WITH MANHOLE LID. CONFORM TO SSL PLAN 331.4. PRESERVE EXISTING BOX.
- 2

REMOVE EXISTING BOX, REPLACE WITH 48" BY 60" PRECAST BOX. INSTALL SINGLE INLET GRATE. CONFORM TO SSL PLANS 309.2 AND 316.1. APPROXIMATE EXISTING BOX DIMENSIONS CAN BE FOUND ON SHEET 4.5.

					DRAWN BY	SHELBEY BREWER
					CHECKED BY	---
					SCALE	1:1
					DATE	2023-08-10
NO.	AUTHORIZED BY	REVISION	MADE BY	DATE		



SOUTH SALT
LAKE
ENGINEERING
DEPARTMENT

220 E MORRIS AVENUE
SOUTH SALT LAKE CITY, UT 84115

2024 STORM WATER
PROJECTS

300 W 2700 S

SHEET

C 1.3

DATE

AUGUST 10, 2023



Construction Notes

2 REMOVE EXISTING BOX AND GRATE. REPLACE WITH CATCH BASIN THAT CONFORMS TO SSL PLANS 309.2 AND 315.1. APPROXIMATE EXISTING BOX DIMENSIONS CAN BE FOUND ON SHEET 4.5.

△				
△				
△				
△				
△				
NO.	AUTHORIZED BY	REVISION	MADE BY	DATE

DRAWN BY	SHELBEY BREWER
CHECKED BY	--
SCALE	1:1
DATE	2023-08-10

is



SOUTH SALT
LAKE
ENGINEERING
DEPARTMENT

220 E MORRIS AVENUE
SOUTH SALT LAKE CITY, UT 84115

2024 STORM WATER
PROJECTS

300 W 2855 S

SHEET
C 1.4
DATE
AUGUST 10, 2023

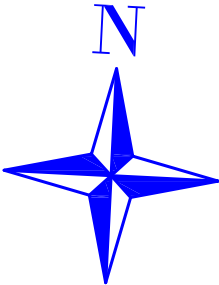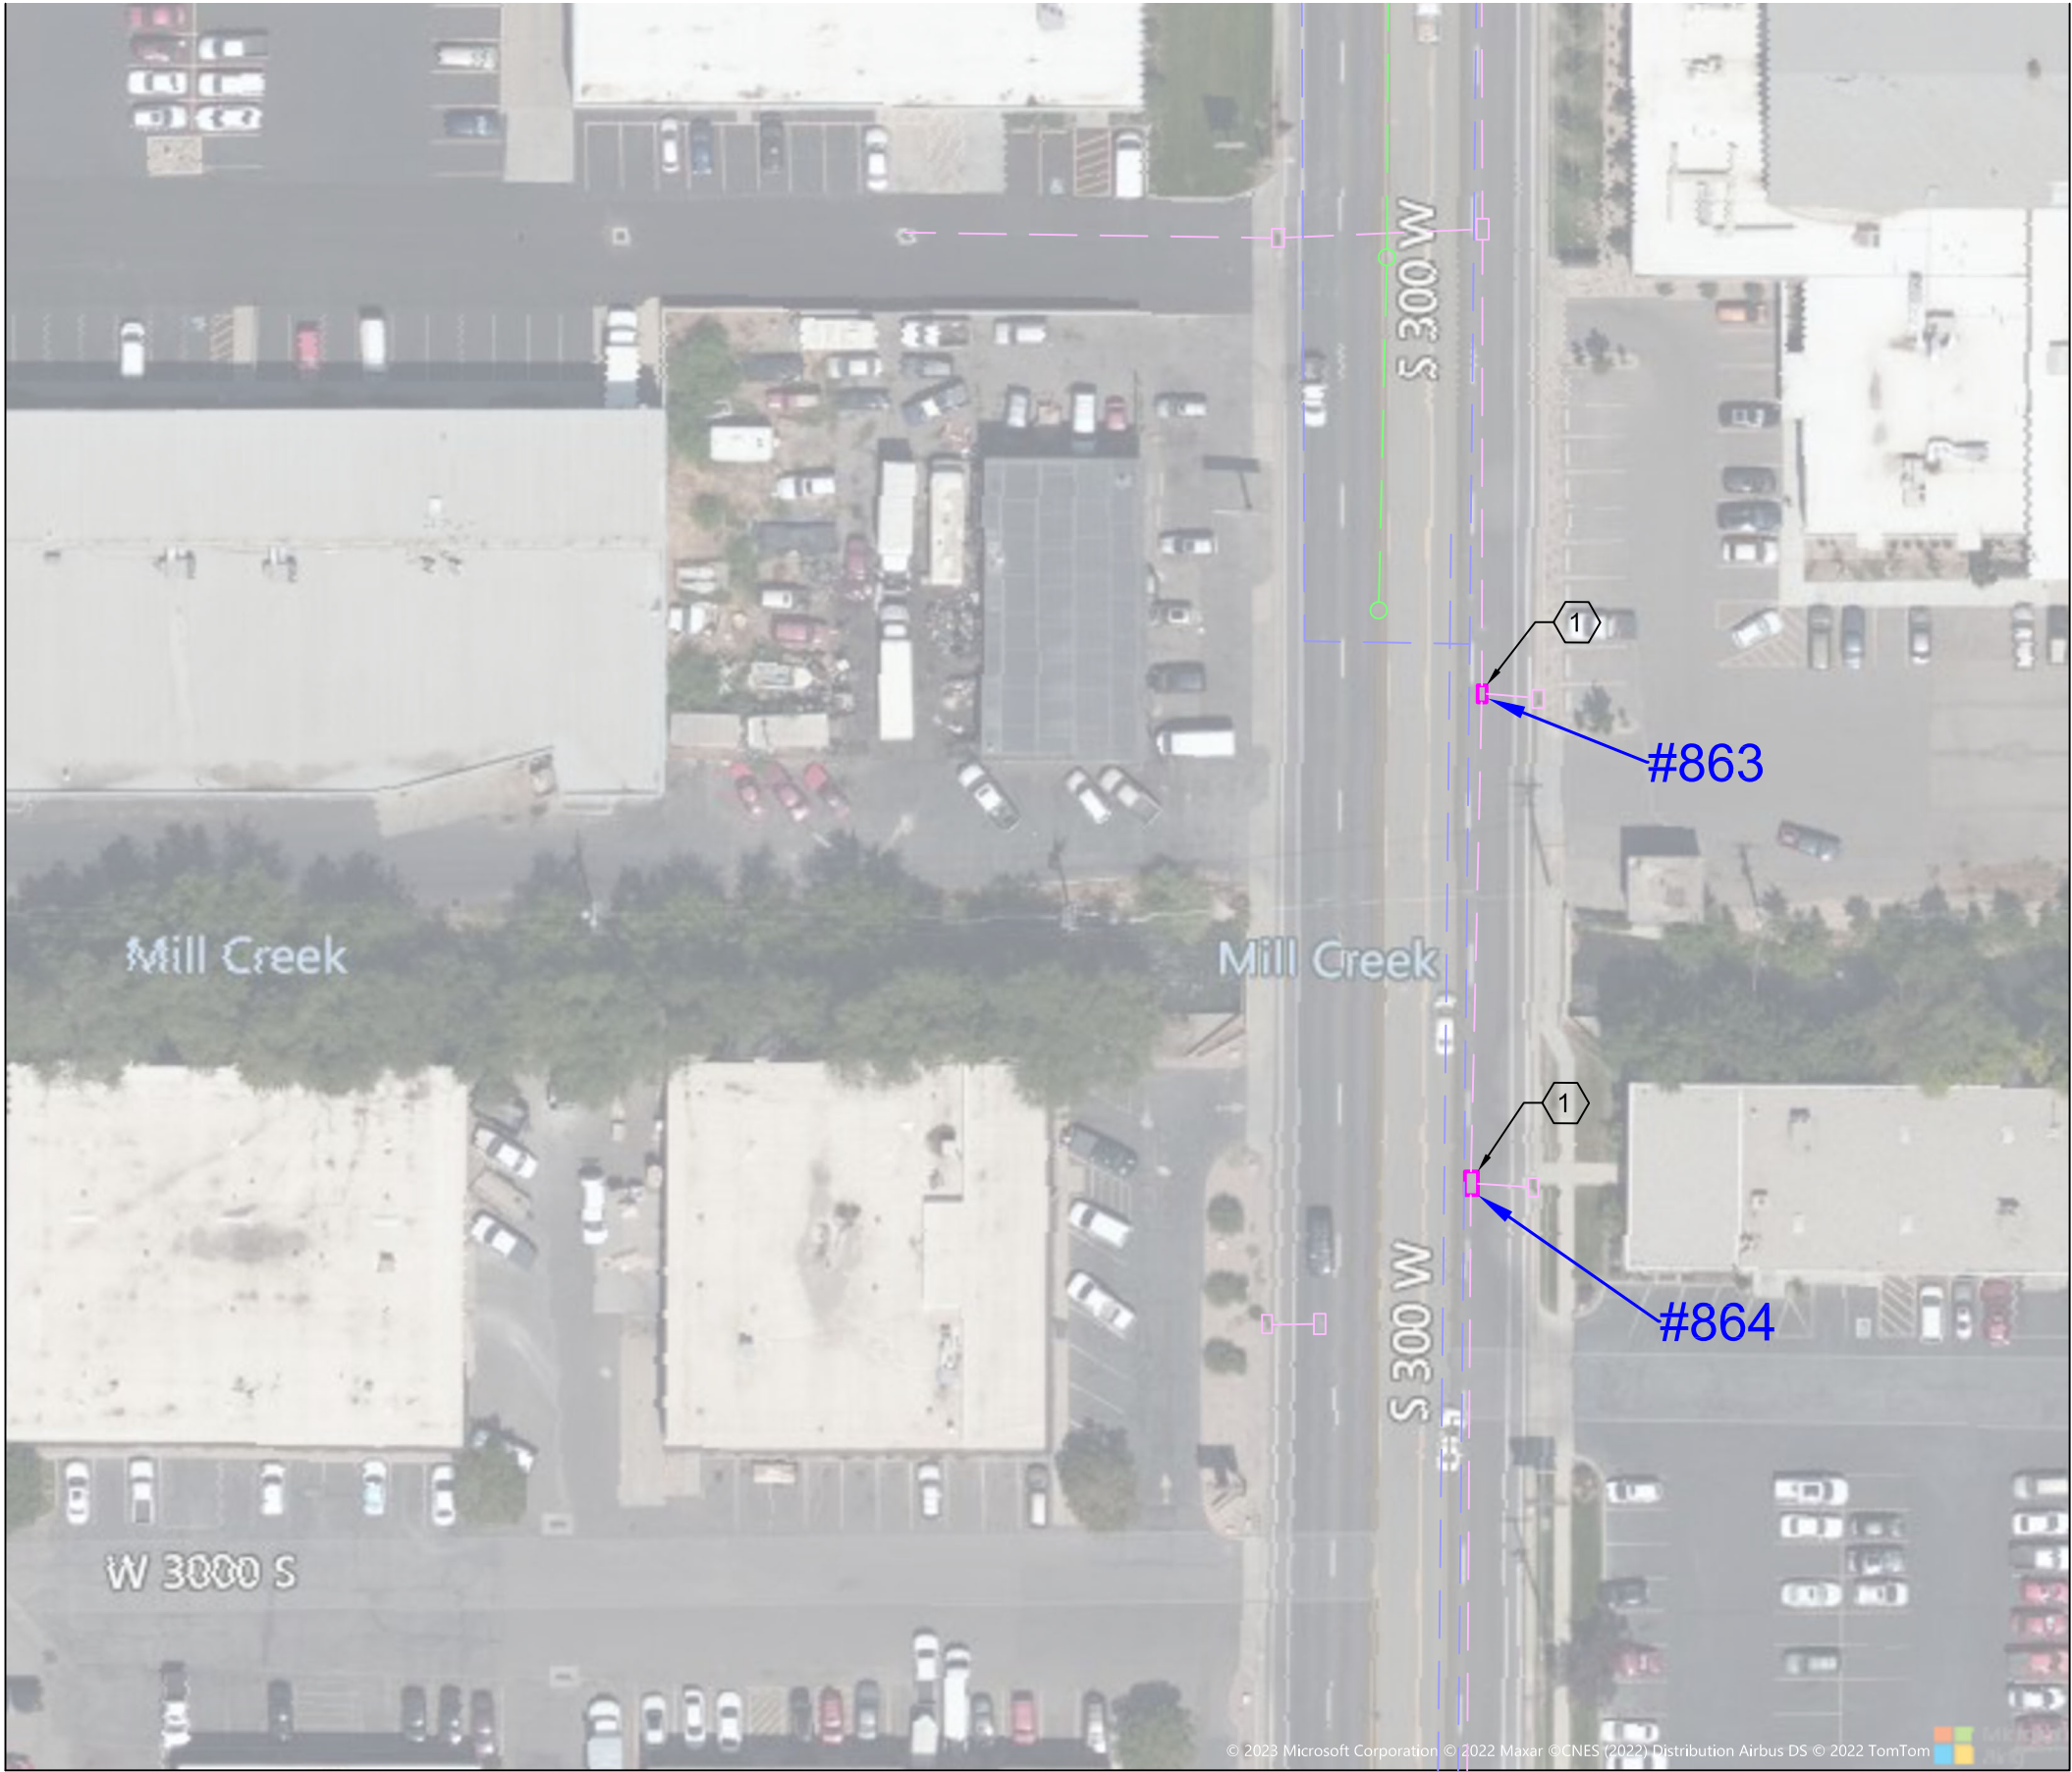

Construction Notes

1 REMOVE RECTANGULAR LID, REPLACE WITH MANHOLE LID. CONFORM TO SSL PLAN 331.4. PRESERVE EXISTING BOX.

△				
△				
△				
△				
△				
NO.	AUTHORIZED BY	REVISION	MADE BY	DATE

DRAWN BY
SHELBEY BREWER

CHECKED BY

SCALE
1:1

DATE
2023-08-10



**SOUTH SALT LAKE
ENGINEERING
DEPARTMENT**

220 E MORRIS AVENUE
SOUTH SALT LAKE CITY, UT 84115

2024 STORM WATER
PROJECTS

300 W 2975 S

SHEET
C 1.5
DATE
AUGUST 10, 2023



Construction Notes

- 1 REMOVE RECTANGULAR LID, REPLACE WITH MANHOLE LID. CONFORM TO SSL PLAN 331.4. PRESERVE EXISTING BOX.
- 3 REMOVE EXISTING BOX AND LID, REPLACE WITH 36" BY 48" PRECAST BOX. CONFORM TO SSL PLAN 331.4. APPROXIMATE EXISTING BOX DIMENSIONS CAN BE FOUND ON SHEET 4.5.

△				
△				
△				
△				
△				
△				
NO.	AUTHORIZED BY	REVISION	MADE BY	DATE

DRAWN BY	SHELBEY BREWER
CHECKED BY	--
SCALE	1:1
DATE	2023-08-10



**SOUTH SALT LAKE
ENGINEERING
DEPARTMENT**

220 E MORRIS AVENUE
SOUTH SALT LAKE CITY, UT 84115

2024 STORM WATER
PROJECTS

300 W 3121 S

SHEET	C 1.6
DATE	AUGUST 10, 2023



Construction Notes

- 1 REMOVE RECTANGULAR LID, REPLACE WITH MANHOLE LID. CONFORM TO SSL PLAN 331.4. PRESERVE EXISTING BOX.

△					DRAWN BY	SHELBEY BREWER
△					CHECKED BY	--
△					SCALE	1:1
△					DATE	2023-08-10
△					NO.	AUTHORIZED BY
					REVISION	MADE BY
					DATE	



**SOUTH SALT LAKE
ENGINEERING
DEPARTMENT**

220 E MORRIS AVENUE
SOUTH SALT LAKE CITY, UT 84115

2024 STORM WATER
PROJECTS

300 W 3195 S

SHEET

C 1.7


DATE

AUGUST 10, 2023



Construction Notes

- 2 REPLACE EXISTING BOX WITH 48" BY 60" PRECAST BOX. INSTALL SINGLE INLET GRATE. CONFORM TO SSL PLANS 309.2 AND 316.1. APPROXIMATE EXISTING BOX DIMENSIONS CAN BE FOUND ON SHEET 4.5.
- 4 REMOVE 118 FT OF 18" CMP PIPE REPLACE WITH 18" RCP SOUTH OF BOX. CONFORM TO APWA PLAN 381.
- 5 REMOVE AND REPLACE DRIVE APPROACH. REPLACE WITH FLARE DRIVE APPROACH APWA PLAN 221.2.
- 6 REMOVE AND REPLACE CURB AND GUTTER. REPLACE WITH CURB AND GUTTER TYPE A APWA PLAN 205.1.

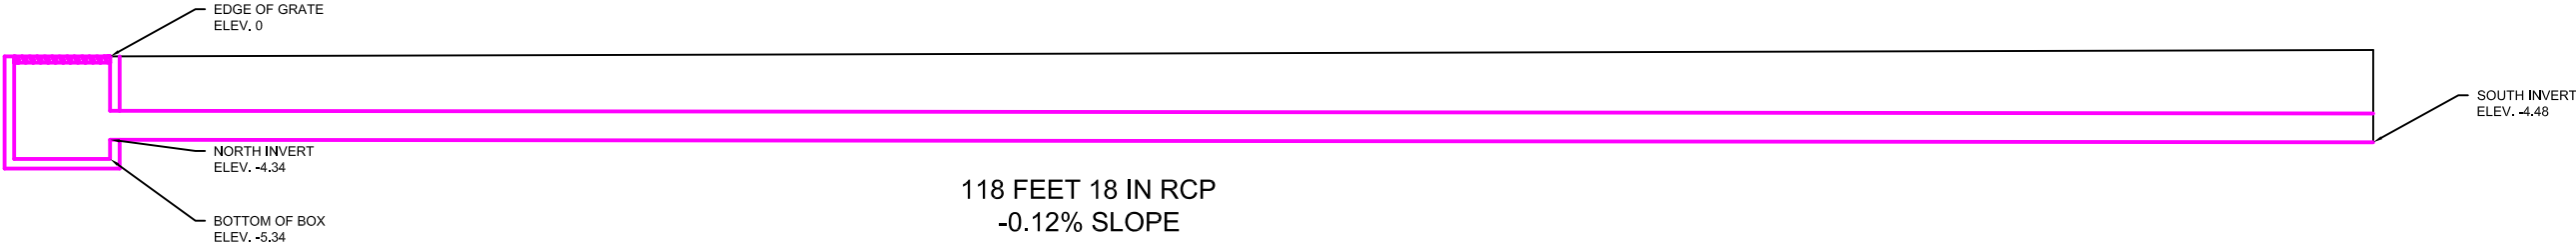

△					DRAWN BY	SHELBEY BREWER
△					CHECKED BY	---
△					SCALE	1:1
△					DATE	2023-08-10
△					NO.	AUTHORIZED BY
					REVISION	MADE BY
					DATE	



SOUTH SALT LAKE
ENGINEERING
DEPARTMENT

220 E MORRIS AVENUE
SOUTH SALT LAKE CITY, UT 84115

2024 STORM WATER
PROJECTS


2500 S MAIN ST.

SHEET

C 1.8


DATE

AUGUST 10, 2023



Construction Notes

- #2 REMOVE EXISTING BOX AND GRATE. REPLACE WITH CATCH BASIN THAT CONFORMS TO SSL PLANS 309.2 AND 315.1. APPROXIMATE EXISTING BOX DIMENSIONS CAN BE FOUND ON SHEET 4.5.
- #4 REMOVE 58 FT OF EXISTING PIPE. REPLACE WITH 58 FT OF 15" RCP. CONFORM TO APWA PLAN 381.

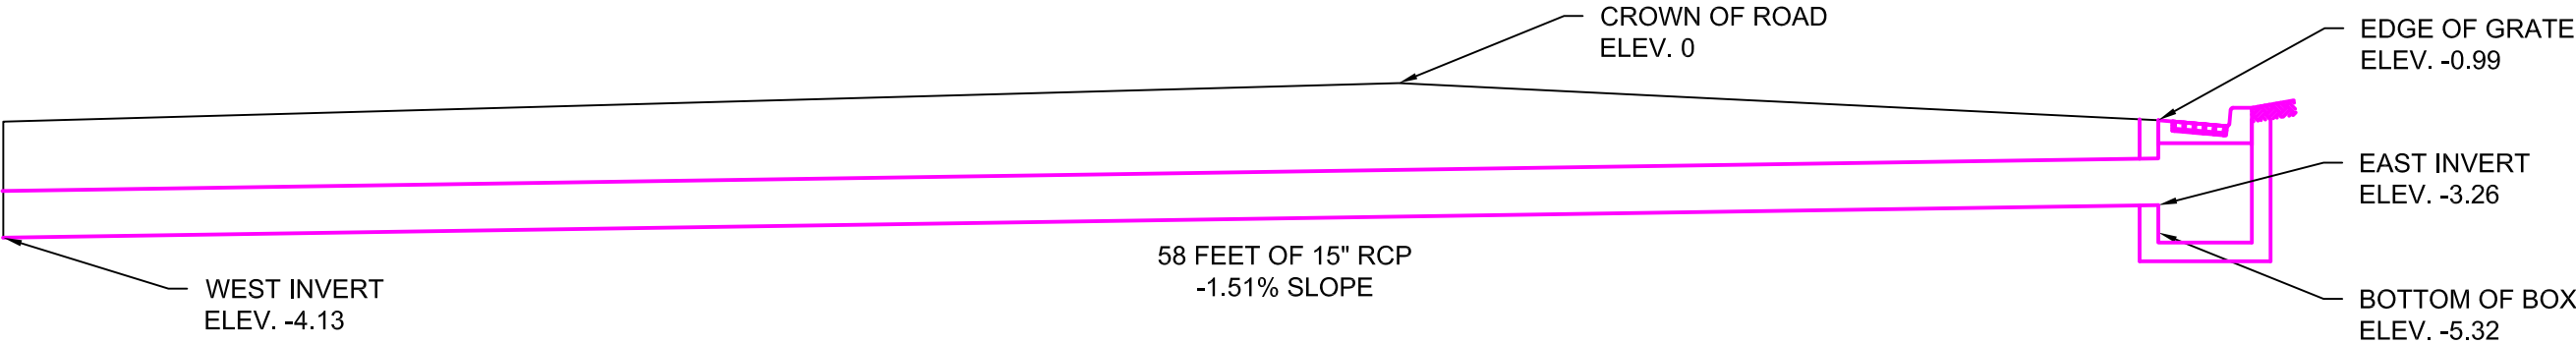

					DRAWN BY	SHELBEY BREWER
					CHECKED BY	---
					SCALE	1:1
					DATE	2023-08-10
	NO.	AUTHORIZED BY	REVISION	MADE BY	DATE	



**SOUTH SALT
LAKE**
ENGINEERING
DEPARTMENT

220 E MORRIS AVENUE
SOUTH SALT LAKE CITY, UT 84115

2024 STORM WATER
PROJECTS

300 E WENTWORTH AVE.

SHEET

C 1.9

DATE

AUGUST 10, 2023



Construction Notes

7 REMOVE EXISTING DOUBLE GRATE, REPLACE WITH SINGLE GRATE. CONFORM TO SSL PLANS 309.2 AND 316.1. PRESERVE EXISTING BOX.



					DRAWN BY	SHELBEY BREWER
					CHECKED BY	---
					SCALE	1:1
					DATE	2023-08-10
	NO.	AUTHORIZED BY	REVISION	MADE BY	DATE	




**SOUTH SALT
LAKE
ENGINEERING
DEPARTMENT**

220 E MORRIS AVENUE
SOUTH SALT LAKE CITY, UT 84115

2024 STORM WATER
PROJECTS


2700 S 264 E

SHEET
C 1.10
DATE
AUGUST 10, 2023

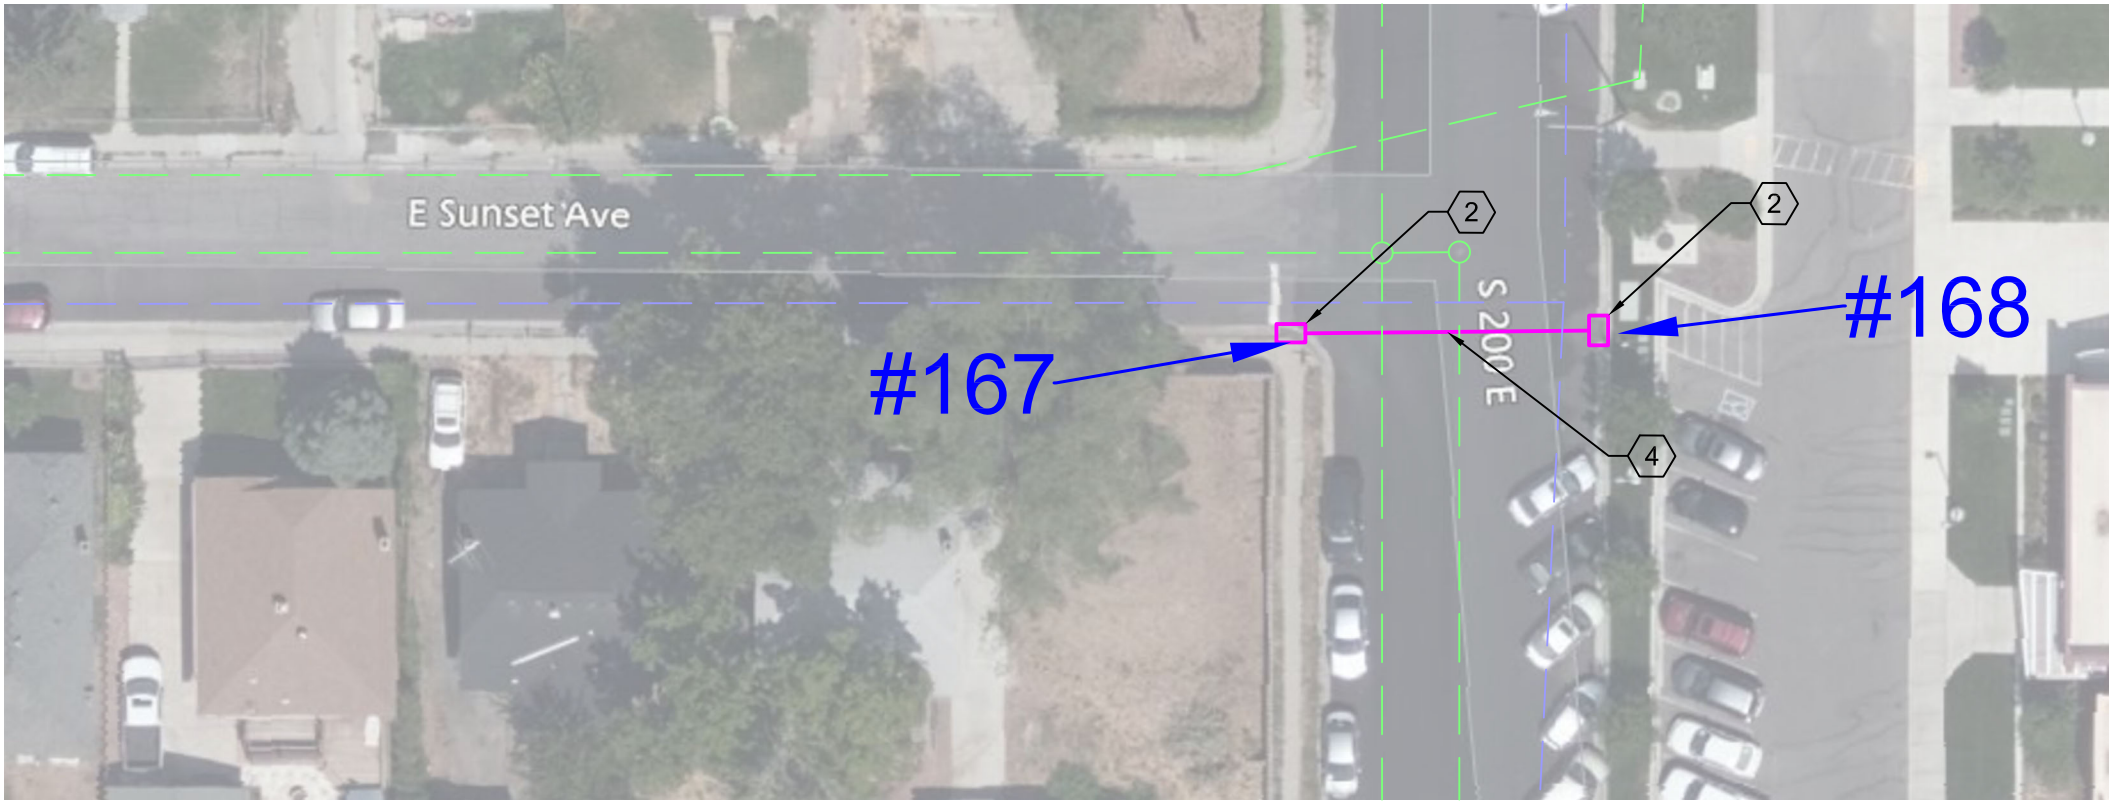

Construction Notes

- 2 REMOVE EXISTING BOX AND GRATE. REPLACE WITH CATCH BASIN THAT CONFORMS TO SSL PLANS 309.2 AND 315.1. APPROXIMATE EXISTING BOX DIMENSIONS CAN BE FOUND ON SHEET 4.5.
- 4 REMOVE 58 FT OF EXISTING PIPE. REPLACE WITH 58 FT OF 12" RCP. CONFORM TO APWA PLAN 381.

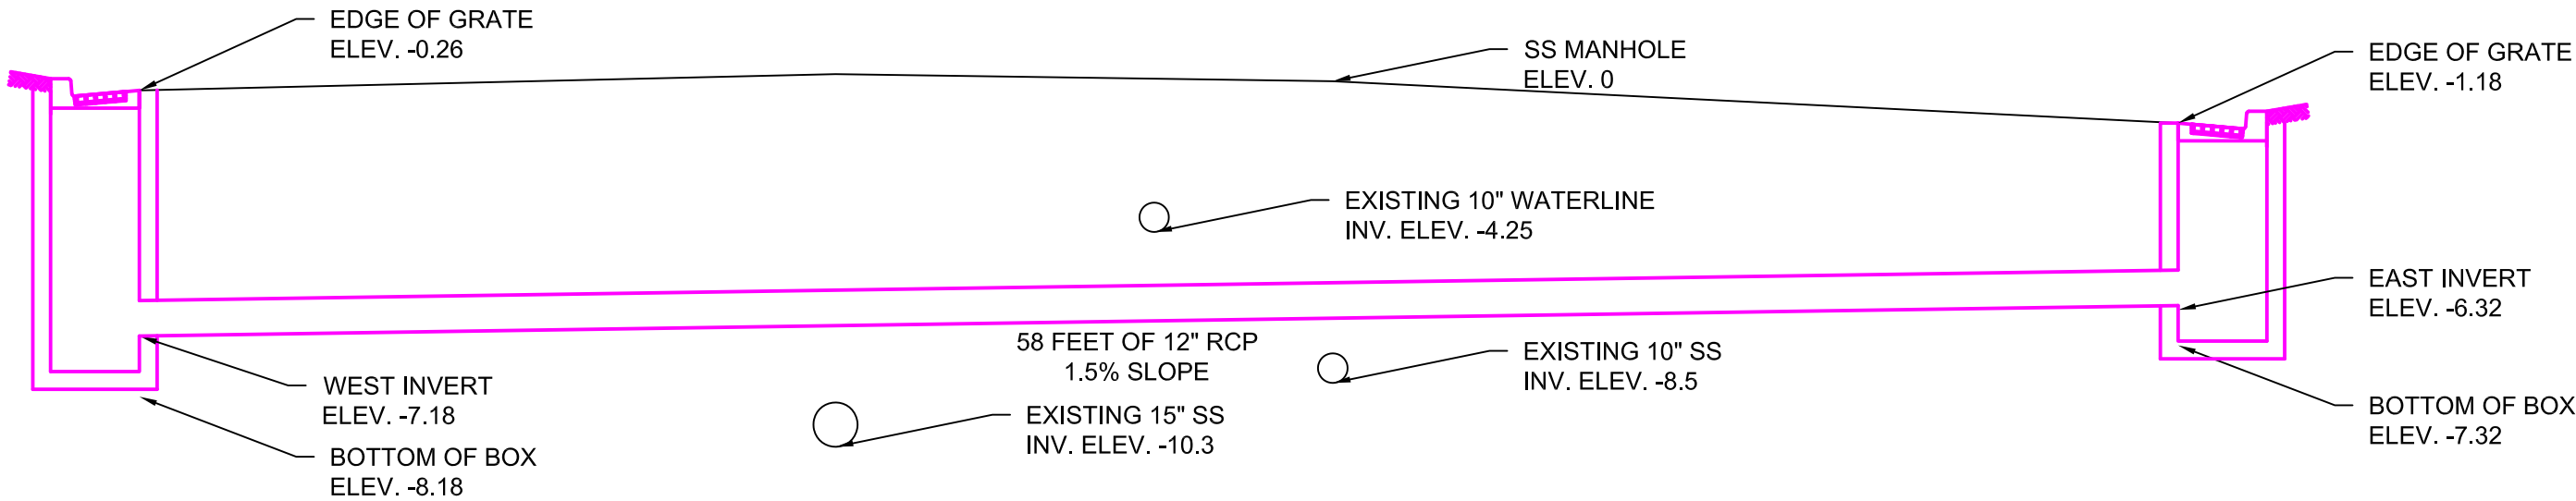

NO.	AUTHORIZED BY	REVISION	MADE BY	DATE
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				

DRAWN BY
SHELBEY BREWER

CHECKED BY

SCALE
1:1


DATE
2023-08-10



2024 STORM WATER PROJECTS

200 E Sunset Ave

SHEET
C 1.11
DATE
AUGUST 10, 2023

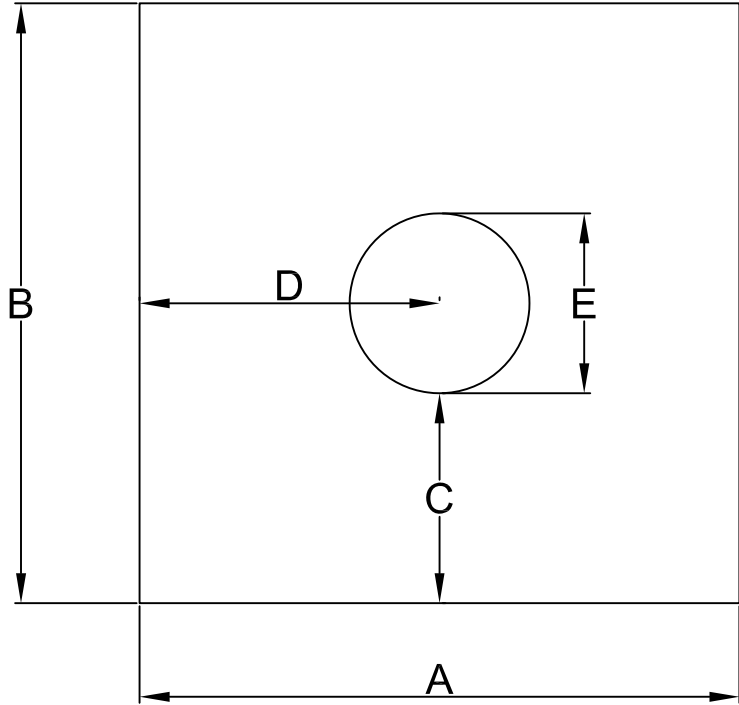

300 W 2700 S (SHEET 1.3)				
NORTH				
A	B	C	D	E
44	56	N/A	N/A	N/A
EAST				
A	B	C	D	E
54	56	10	28	30
SOUTH				
A	B	C	D	E
44	56	18	21.5	15
WEST				
A	B	C	D	E
54	56	0	23	36

300 W 2855 S (SHEET 1.4)				
NORTH				
A	B	C	D	E
23	36	N/A	N/A	N/A
EAST				
A	B	C	D	E
45	34	5	22	16
SOUTH				
A	B	C	D	E
23	34	N/A	N/A	N/A
WEST				
A	B	C	D	E
45	36	9	9	14

300 W 3121 S (SHEET 1.6)				
NORTH				
A	B	C	D	E
31	40	4	15	18
EAST				
A	B	C	D	E
46	40	1	23	12
SOUTH				
A	B	C	D	E
30	40	4	17	19
WEST				
A	B	C	D	E
47	40	N/A	N/A	N/A

2500 S MAIN STREET (SHEET 1.8)				
NORTH				
A	B	C	D	E
48	48	5	27	18
EAST				
A	B	C	D	E
60	48	9	17	12
SOUTH				
A	B	C	D	E
48	48	3	20	18
WEST				
A	B	C	D	E
60	48	N/A	N/A	N/A

300 E WENTWORTH AVE (SHEET 1.9)				
NORTH				
A	B	C	D	E
36	47	18	14	14
EAST				
A	B	C	D	E
36	45	27.5	26.8	8.5
SOUTH				
A	B	C	D	E
36	46	20	24.5	15
WEST				
A	B	C	D	E
36	48	24	25.5	13X17

200 E SUNSET AVE (SHEET 1.11)				
NORTH				
A	B	C	D	E
28	14.5	N/A	N/A	N/A
EAST				
A	B	C	D	E
44	15	N/A	N/A	N/A
SOUTH				
A	B	C	D	E
28	14.5	N/A	N/A	N/A
WEST				
A	B	C	D	E
44	14.5	0	14	10

Construction Notes

1. ALL DIMENSIONS SHOWN ARE APPROXIMATE. CONTRACTOR MUST FIELD VERIFY BEFORE FABRICATING BOXES.

△					
△					
△					
△					
△					
NO.	AUTHORIZED BY	REVISION	MADE BY	DATE	

DRAWN BY
SHELBEY BREWER

CHECKED BY
—

SCALE
1:1

DATE
2023-08-10



2024 STORM WATER
PROJECTS

EXISTING BOX
DIMENSIONS

SHEET
C 4.5
DATE
AUGUST 10, 2023