



State of Utah

SPENCER J. COX  
Governor

DEIDRE HENDERSON  
Lieutenant Governor

Department of  
Environmental Quality

Kimberly D. Shelley  
Executive Director

DIVISION OF AIR QUALITY  
Bryce C. Bird  
Director

**Air Quality Board**  
Kim Frost, *Chair*  
Michelle Bujdoso, *Vice-Chair*  
Kevin R. Cromar  
Cassady Kristensen  
Randal S. Martin  
Sonja Norton  
John Rasband  
Kimberly D. Shelley  
Jeff Silvestrini  
Bryce C. Bird,  
*Executive Secretary*

DAQ-012-25

**UTAH AIR QUALITY BOARD MEETING  
TENTATIVE AGENDA**

**Wednesday, February 5, 2025 - 1:30 p.m.**  
**195 North 1950 West, Room 1015**  
**Salt Lake City, Utah 84116**

Board members may be participating electronically. Interested persons can participate telephonically by dialing 1-475-299-8810 using access code: 449-801-632#, or via the Internet at meeting link: [meet.google.com/dpm-oqgm-nzk](https://meet.google.com/dpm-oqgm-nzk)

- I. Call-to-Order
- II. Date of the Next Air Quality Board Meeting: March 5, 2025
- III. Approval of the Minutes for the November 6, 2024, Board Meeting.
- IV. Propose for Final Adoption: Amend Utah State Implementation Plan, Section X, Vehicle Inspection and Maintenance Program, Part F, Cache County; and R307-110-36. Section X, Vehicle Inspection and Maintenance Program, Part F, Cache County. Presented by Mat Carlile.
- V. Propose for Final Adoption: New Rule R307-209. Portable Aggregate Processing Plants. Presented by Alan Humpherys.
- VI. Propose for Final Adoption: Amend R307-401. Permit: New and Modified Sources. Presented by Alan Humpherys.
- VII. Propose for Public Comment: Amend R307-150. Emission Inventories. Presented by Greg Mortensen.
- VIII. Propose for Public Comment: Amendment to Section R307-110-17. Section IX, Control Measures for Area and Point Sources, Part H, Emission Limits; and Amendments to Utah State Implementation Plan, Section IX.H.11 and Section IX.H.12: Emission Limitations and Operating Practices. Presented by Ana Williams.

- IX. Informational Items:
- A. Air Toxics. Presented by Leonard Wright.
  - B. Compliance. Presented by Harold Burge, Rik Ombach, and Chad Gilgen.
  - C. Monitoring. Presented by Bo Call.
  - D. Other Items to be Brought Before the Board.
  - E. Board Meeting Follow-up Items.

In compliance with the Americans with Disabilities Act, individuals with special needs (including auxiliary communicative aids and services) should contact LeAnn Johnson, Office of Human Resources at (385) 226-4881, TDD (801) 536-4284 or by email at leannjohnson@utah.gov.

# ITEM 4



State of Utah

SPENCER J. COX  
*Governor*

DEIDRE HENDERSON  
*Lieutenant Governor*

Department of  
Environmental Quality

Kimberly D. Shelley  
*Executive Director*

DIVISION OF AIR QUALITY  
Bryce C. Bird  
*Director*

DAQ-011-25

**MEMORANDUM**

**TO:** Air Quality Board

**THROUGH:** Bryce C. Bird, Executive Secretary

**FROM:** Mat Carlile, Environmental Planning Consultant

**DATE:** January 23, 2025

**SUBJECT:** PROPOSE FOR FINAL ADOPTION: Amend Utah State Implementation Plan, Section X, Vehicle Inspection and Maintenance Program, Part F, Cache County; and R307-110-36. Section X, Vehicle Inspection and Maintenance Program, Part F, Cache County.

---

On November 6, 2024, the Utah Air Quality Board approved for public comment amendments to Part F of Utah SIP Section X. and Section R307-110-36. Amendments to Part F update Cache County's regulation to reflect the activities of the current programs, provide clarity, and ensure that the programs conform to federal requirements.

A public comment period was held from December 1-31, 2024. No public comments were received, and no hearing was requested.

Recommendation: Staff recommend the Board approve the amendment to SIP Section X, Parts F, and Section R307-110-36 for final adoption.

**State of Utah**  
**Administrative Rule Analysis**  
Revised May 2024

**NOTICE OF SUBSTANTIVE CHANGE**

**TYPE OF FILING:** Amendment

**Rule or Section Number:**

**R307-110-36**

**Filing ID: Office Use Only**

**Date of Previous Publication (Only for CPRs):** [Click or tap to enter a date.](#)

**Agency Information**

<b>1. Title catchline:</b>	Environmental Quality, Air Quality	
<b>Building:</b>	Multi-Agency State Office Building	
<b>Street address:</b>	195 N 1950 W	
<b>City, state:</b>	Salt Lake City	
<b>Mailing address:</b>	PO Box 144820	
<b>City, state and zip:</b>	Salt Lake City, UT 84114-4820	
<b>Contact persons:</b>		
<b>Name:</b>	<b>Phone:</b>	<b>Email:</b>
Erica Pryor	385-499-3416	epryor1@utah.gov
Mat Carlile	385-306-6535	mcarlile@utah.gov

**Please address questions regarding information on this notice to the persons listed above.**

**General Information**

**2. Rule or section catchline:**

R307-110-36. General Requirements: State Implementation Plan

**3. Purpose of the new rule or reason for the change:**

The Utah Air Quality Board (Board) has proposed for public comment amended Utah State Implementation Plan (SIP), Section X, Part F. Section R307-110-36 incorporates SIP Section X, Parts F, into the rule and must be amended to change the Board adoption date to the anticipated adoption date of the amended plan

**4. Summary of the new rule or change:**

Section R307-110-36 incorporates Section X Part F of the Utah State Implementation Plan (SIP). Section R307-110-36 incorporates Section X Part F of the Utah SIP. Part F contains the requirements of Cache County's I/M program. Amendments to Part F update the plan to incorporate changes to Cache County's I/M regulation to ensure that the SIP reflects the current program. Section R307-110-36 is amended by changing the date of the last adoption by the Air Quality Board to February 5, 2025. These changes were already legally enforceable, and the amendment is bringing the rule in line with federal law.

**Fiscal Information**

**5. Provide an estimate and written explanation of the aggregate anticipated cost or savings to:**

**A) State budget:**

This rule change will not have any fiscal impact on the state budget because it does not enact or remove any new requirements.

**B) Local governments:**

This rule change will not have any fiscal impact on the local governments because it does not enact or remove any new requirements

**C) Small businesses ("small business" means a business employing 1-49 persons):**

This rule change will not have any fiscal impact on small businesses because it does not enact or remove any new requirements.

**D) Non-small businesses ("non-small business" means a business employing 50 or more persons):**

This rule change will not have any fiscal impact on non- small businesses because it does not enact or remove any new requirements.

**E) Persons other than small businesses, non-small businesses, state, or local government entities** ("person" means any individual, partnership, corporation, association, governmental entity, or public or private organization of any character other than an **agency**):

This rule change will have not any fiscal impact on other persons because it does not enact or remove any new requirements.

**F) Compliance costs for affected persons** (How much will it cost an impacted entity to adhere to this rule or its changes?):

No additional costs for affected persons are anticipated due to this rule change because it does not enact or remove any new requirements.

**G) Regulatory Impact Summary Table** (This table only includes fiscal impacts that could be measured. If there are inestimable fiscal impacts, they will not be included in this table. Inestimable impacts will be included in narratives above.)

Regulatory Impact Table			
Fiscal Cost	FY2025	FY2026	FY2027
State Government	\$0	\$0	\$0
Local Governments	\$0	\$0	\$0
Small Businesses	\$0	\$0	\$0
Non-Small Businesses	\$0	\$0	\$0
Other Persons	\$0	\$0	\$0
<b>Total Fiscal Cost</b>	<b>\$0</b>	<b>\$0</b>	<b>\$0</b>
Fiscal Benefits	FY2025	FY2026	FY2027
State Government	\$0	\$0	\$0
Local Governments	\$0	\$0	\$0
Small Businesses	\$0	\$0	\$0
Non-Small Businesses	\$0	\$0	\$0
Other Persons	\$0	\$0	\$0
<b>Total Fiscal Benefits</b>	<b>\$0</b>	<b>\$0</b>	<b>\$0</b>
<b>Net Fiscal Benefits</b>	<b>\$0</b>	<b>\$0</b>	<b>\$0</b>

**H) Department head comments on fiscal impact and approval of regulatory impact analysis:**

The Executive Director of the Department of Environmental Quality, Kim D. Shelley, has reviewed and approved this regulatory impact analysis.

**Citation Information**

**6. Provide citations to the statutory authority for the rule. If there is also a federal requirement for the rule, provide a citation to that requirement:**

Section 19-6a-1642	40 CFR Part 51 Subpart S Inspection and Maintenance Program Requirements	

**Incorporations by Reference Information**

**7. Incorporations by Reference** (if this rule incorporates more than two items by reference, please include additional tables):

**A) This rule adds or updates the following title of materials incorporated by references** (a copy of materials incorporated by reference must be submitted to the Office of Administrative Rules; *if none, leave blank*):

<b>Official Title of Materials Incorporated (from title page)</b>	UTAH STATE IMPLEMENTATION PLAN SECTION X VEHICLE INSPECTION AND MAINTENANCE PROGRAM PART F CACHE COUNTY
<b>Publisher</b>	Division of Air Quality, Utah Department of Environmental Quality
<b>Issue Date</b>	February 5, 2025
<b>Issue or Version</b>	

**B) This rule adds or updates the following title of materials incorporated by references** (a copy of materials incorporated by reference must be submitted to the Office of Administrative Rules; *if none, leave blank*):

<b>Official Title of Materials Incorporated (from title page)</b>	
<b>Publisher</b>	
<b>Issue Date</b>	
<b>Issue or Version</b>	

**Public Notice Information**

**8. The public may submit written or oral comments to the agency identified in box 1.** (The public may also request a hearing by submitting a written request to the agency. See Section 63G-3-302 and Rule R15-1 for more information.)

**A) Comments will be accepted until:** 12/31/2024

**B) A public hearing (optional) will be held:**

<b>Date (mm/dd/yyyy):</b>	<b>Time (hh:mm AM/PM):</b>	<b>Place (physical address or URL):</b>
12/18/2024	2:30 PM	<p>R307-110-36 Public Hearing</p> <p>Wednesday, December 18, 2024 at 2:30 PM</p> <p><b>In Person</b></p> <p>Multi-Agency State Office Building (MASOB) 195 N 1950 W, Salt Lake City, UT 84116, USA Air Quality Board Room 1015, 1<sup>st</sup> Floor</p> <p><b>Or attend virtually:</b></p> <p>Air Quality Public Hearing R307-110-36 <b>Wednesday, December 18 · 2:30 – 3:30pm</b></p> <p><b>Time zone:</b> America/Denver</p> <p><b>Google Meet joining info</b></p> <p><b>Video call link:</b> <a href="https://meet.google.com/pap-hiyu-unw">https://meet.google.com/pap-hiyu-unw</a></p> <p><b>Or dial: (US)</b> +1 413-438-4082 PIN: 356 203 677# <b>More phone numbers:</b> <a href="https://tel.meet/pap-hiyu-unw?pin=6631750756387">https://tel.meet/pap-hiyu-unw?pin=6631750756387</a></p> <p>In accordance with 63G-3-302, please note that if no requests for a public hearing for R307-110-36 are received by 2:00pm on December 13<sup>th</sup>, 2024, then we will cancel this hearing.</p> <p>To determine if the hearing has been cancelled and/or view the cancellation notice, you can visit: <a href="https://deq.utah.gov/air-quality/air-quality-rule-plan-changes-open-public-comment">https://deq.utah.gov/air-quality/air-quality-rule-plan-changes-open-public-comment</a></p>

**To the agency:** If more than one hearing will take place, continue to add rows.

**9. This rule change MAY become effective on:** 02/05/2025

NOTE: The date above is the date the agency anticipates making the rule or its changes effective. It is NOT the effective date.

**Agency Authorization Information**

**To the agency:** Information requested on this form is required by Sections 63G-3-301, 63G-3-302, 63G-3-303, and 63G-3-402. Incomplete forms will be returned to the agency for completion, possibly delaying publication in the *Utah State Bulletin* and delaying the first possible effective date.

<b>Agency head or designee and title:</b>	Bryce C. Bird, Director, Division of Air Quality	<b>Date:</b>	10/23/2024
---	--	--------------	------------

1 **R307. Environmental Quality, Air Quality.**  
2 **R307-110. General Requirements: State Implementation Plan.**  
3  
4 ....  
5 **R307-110-36. Section X, Vehicle Inspection and Maintenance Program, Part F, Cache County.**  
6 The Utah State Implementation Plan, Section X, Vehicle Inspection and Maintenance Program, Part  
7 F, Cache County, as most recently adopted by the Utah Air Quality Board on [~~September 4, 2019~~]February  
8 5, 2025, pursuant to Section 19-2-104, is [~~hereby~~] incorporated by reference and made a part of [~~these~~]this  
9 rule[s].  
10  
11  
12 ....  
13 **KEY: air pollution, PM10, PM2.5, ozone**  
14 **Date of Last Change: February 7, 2024**  
15 **Notice of Continuation: December 1, 2021**  
16 **Authorizing, and Implemented or Interpreted Law: 19-2-104**

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41

**UTAH STATE IMPLEMENTATION PLAN**

**SECTION X**

**VEHICLE INSPECTION AND  
MAINTENANCE PROGRAM**

**Part F**

**Cache County**

Adopted by the Utah Air Quality Board  
[~~September 4, 2019~~] February 5, 2025

**Table of Contents**

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44

1. Applicability ..... 1  
2. Description of Cache I/M Programs ..... 1  
3. I/M SIP Implementation ..... 2

**SECTION X Part F**  
**Cache County Emission Inspection/ Maintenance Program**  
**APPENDICES**

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36

1. Cache County Emission Inspection/ Maintenance Program Ordinance 2018-15
2. Bear River Health Department Regulation 2013-1 Updated July 1, 2024

1  
2  
3  
4

**UTAH STATE IMPLEMENTATION PLAN  
SECTION X, PART F  
VEHICLE INSPECTION AND MAINTENANCE (I/M) PROGRAM**

5  
6

**1. Applicability**

7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18

*Cache County I/M program requirements:* Cache County was designated nonattainment for the PM<sub>2.5</sub> National Ambient Air Quality Standard (NAAQS) on December 14, 2009 (74 FR 58688, November 13, 2009). Accordingly, Cache County implemented control strategies to attain the PM<sub>2.5</sub> NAAQS. A motor vehicle emission inspection and maintenance (I/M) program was identified by the PM<sub>2.5</sub> State Implementation Plan (SIP) as a necessary control strategy to attain the PM<sub>2.5</sub> NAAQS as expeditiously as practicable. Therefore, pursuant to Utah Code Annotated 41-6a-1642, Cache County implemented an I/M program that complies with the minimum requirements of 40 CFR Part 51 Subpart S. Cache County implemented its I/M program county-wide. This program was approved by EPA on October 9, 2015 (80 FR 54237 September 9, 2019). Parts A and F of Section X demonstrate compliance with 40 CFR Part 51 Subpart S for Cache County.

19  
20

**2. Description of Cache I/M Programs**

21  
22

Below is a summary of Cache County's I/M program. Section X, Part F Appendices 1 and 2 contain the essential documents for Cache County's I/M program.

23  
24  
25  
26

*Network Type:* Cache County's I/M program will comprise of a decentralized test-and-repair network.

27  
28  
29  
30  
31  
32

*Test Convenience:* Cache County will make every effort to ensure that its citizens will have stations conveniently located throughout Cache County. Specific operating hours are not specified by the county; however, its Regulation requires that stations be open and available to perform inspections during a major portion of normal business hours of 8:00 a.m. to 5:00 pm Mondays through Fridays.

33  
34  
35

*Subject fleet:* All model year 1996 and newer vehicles registered or principally-operated in Cache County are subject to the I/M program except for exempt vehicles.

36  
37  
38  
39  
40  
41  
42

*Station/inspector Audits:* Cache County's I/M program will regularly audit all permitted I/M inspectors and stations to ensure compliance with county I/M ordinances, regulations, and policies. Particular attention will be given to identifying and correcting any fraud or incompetence with respect to vehicle emissions inspections. Compliance with recordkeeping, document security, analyzer maintenance, and program security requirements will be scrutinized. The Cache County I/M program will have an active covert compliance program to minimize potential fraudulent testing.

1  
2 *Waivers:* Cache County’s I/M program allows for the issuance of waivers under limited  
3 circumstances. The procedure for issuing waivers is specified in Cache County’s I/M  
4 regulation provided in Section 9.5 of Appendix 2 of this part of the SIP and meets the  
5 minimum waiver issuance criteria specified in 40 CFR Subparts 51.360.  
6

7 *Test frequency:* Vehicles less than six years old as of January 1 on any given year will be  
8 exempt from an emissions inspection. All model year 1996 and newer vehicles are  
9 subject to a biennial test.  
10

11 *Test Equipment:* Specifications for the I/M test procedures, standards and analyzers are  
12 described in Cache County’s I/M regulation provided in Appendix 2. Specifications for  
13 the test procedure and equipment were developed according to good engineering  
14 practices to ensure test accuracy. Certified testing equipment and emissions test  
15 procedures meet the minimum standards established in Appendix A of the EPA's I/M  
16 Guidance Program Requirements, 40 CFR Part 51 Subpart S.  
17

18 *Test Procedures:*

- 19 • The following vehicles are subject to an on-board diagnostic (OBD) II inspection:  
20
  - 21 ○ 1996 and newer light duty vehicles<sup>1</sup> and
  - 22 ○ 2008 and newer medium duty vehicles<sup>2</sup>  
23  
24

25 Test procedures are outlined in Appendix 2 of this part of the SIP  
26  
27

### 28 **3. I/M SIP Implementation**

29  
30 The I/M program ordinance, regulations, policies, procedures, and activities specified in  
31 this I/M SIP revision shall be implemented by [~~January 1, 2024~~] July 1, 2024 and shall  
32 continue until a maintenance plan without an I/M program is approved by EPA in  
33 accordance with Section 175 of the Clean Air Act.  
34  
35

---

1 Light duty vehicles have a Gross Vehicle Weight of 8500 lbs or less.

2 Medium duty vehicles have a Gross Vehicle Weight greater than 850[0]1 lbs but less than 14,000 lbs



Regulation No. 2013-1

**VEHICLE EMISSIONS INSPECTION  
AND MAINTENANCE PROGRAM**

Adopted by the Bear River Board of Health  
May 9, 2013

Updated May 27, 2015  
Updated April 10, 2019  
Updated January 5, 2023  
Updated July 1, 2024

Under Authority of Section 26A-1-121  
Utah Code Annotated, 1953, as amended

# Table of Contents

1.0	DEFINITIONS.....	3
2.0	PURPOSE.....	6
3.0	AUTHORITY AND JURISDICTION OF THE DEPARTMENT.....	6
4.0	POWERS AND DUTIES.....	7
5.0	SCOPE.....	9
6.0	GENERAL PROVISIONS.....	9
7.0	PERMIT REQUIREMENTS OF THE VEHICLE EMISSIONS I/M PROGRAM STATION.....	14
8.0	TRAINING AND CERTIFICATION OF INSPECTORS.....	15
9.0	INSPECTION PROCEDURE.....	17
10.0	ENGINE SWITCHING.....	20
11.0	SPECIFICATIONS FOR CERTIFIED TESTING EQUIPMENT.....	21
12.0	QUALITY ASSURANCE.....	21
13.0	DISCIPLINARY PENALTIES AND RIGHT TO APPEAL.....	21
14.0	PENALTY.....	23
15.0	SEVERABILITY.....	23
16.0	EFFECTIVE DATE.....	24
	APPENDIX A – FEE SCHEDULE.....	25
	APPENDIX B - RESERVED.....	26
	APPENDIX C – PENALTY SCHEDULE.....	27
	APPENDIX D – TEST PROCEDURES.....	28
	APPENDIX E – CERTIFIED TESTING EQUIPMENT STANDARDS.....	34
	APPENDIX F – WAIVERS FOR “NOT READY” VEHICLES.....	37

## 1.0 DEFINITIONS

For the purpose of this Regulation, the following terms, phrases, and words shall have the following meanings, unless otherwise defined:

Alternative Fuel: A fuel that is derived from resources other than petroleum. This includes but is not limited to: natural gas, propane, ethanol, and bio-diesel.

Bi-fuel Vehicle: A vehicle that has two separate fueling systems that enables the vehicle to run on one or the other (ex. Gasoline and natural gas). These vehicles may be switchable or non-switchable.

1 Board: See Board of Health.

2 Board of Health: The Bear River Board of Health.

3 Cache County Council: The elected Cache County Council representatives.

4 Certificate of Compliance: Proof that a vehicle meets all applicable requirements  
5 of the I/M Program. This proof may be sent in an electronic format to the Utah  
6 State Tax Commission.

7 Certification: Assurance by an authorized source, whether it be a laboratory, the  
8 manufacturer, the State, or the Department, that a specific product or statement is  
9 in fact true and meets all required requirements.

10 Certified Emissions Inspector: A person who has successfully completed all  
11 certification requirements and has been issued a current, valid Certified Emissions  
12 Inspector Certification by the Department.

13 Certified Testing Equipment: An official test instrument that has been approved by  
14 the Department to test motor vehicles for compliance with this Regulation.

15 Compliance: Verification that certain submission data and hardware submitted by  
16 a manufacturer for accreditation consideration, meets all required accreditation  
17 requirements.

18 Compliance Assurance Inspection: A more detailed emissions inspection  
19 performed at the I/M Technical Center. Details of this inspection are found in  
20 Appendix D, Test Procedures.

21 Compliance Assurance List: A list created and maintained by the Department that  
22 identifies vehicles for Compliance Assurance Inspections. Vehicles placed on this  
23 list, as required in Section 6.8 and Appendix D, Test Procedures, shall be  
24 inspected at the I/M Technical Center.

25 Contractor: The emission inspection system contractor selected by the Department  
26 to provide specialized services related to the I/M Program in Cache County.

27 Council: See Cache County Council.

28 County: Cache County, Utah.

29 Department: The Bear River Health Department.

30 Director: The Director of the Bear River Health Department or his authorized  
31 representative.

1 DLC: Data Link Connector used in OBD applications is a 16 pin connector used  
2 by scan tools and other emission diagnostic equipment to communicate with the  
3 vehicle's computer for the purpose of collecting emissions related data.

4 DTC: Diagnostic Trouble Code is a standardized 5 digit code that is used to  
5 identify a specific fault that has occurred or is occurring in a vehicle.

6 Dual Fuel Vehicle: See Flexible Fuel Vehicle.

7 Emissions Control Systems: Parts, assemblies or systems originally installed by  
8 the manufacturer in or on a vehicle for the sole or primary purpose of reducing  
9 emissions.

10 EPA: The United States Environmental Protection Agency.

11 Flexible Fuel Vehicle: Also called Flex-Fuel Vehicle. A vehicle that is designed to  
12 run on more than one fuel, usually gasoline blended with ethanol (0-85%), and  
13 both fuels are stored in the same common tank.

14 I/M Program: See Vehicle Emissions Inspection and Maintenance Program.

15 I/M Program Station: A vehicle Emissions Inspection and Maintenance Station  
16 that qualifies and has a valid permit, issued by the Department, to operate as an  
17 emissions inspection and maintenance station in the I/M Program.

18 I/M Technical Center: A facility operated by the Department for technical or  
19 administrative support of the I/M Program.

20 Inspection: An official vehicle emissions test performed for the purpose of  
21 issuing a Certificate of Compliance or Waiver.

22 Inspector: A Certified Emissions Inspector.

23 MIL: Malfunction Indicator Light is an indicator located on the instrument panel  
24 that notifies the operator of an emissions fault.

25 Motor Vehicle: A self-propelled motorized vehicle with an internal combustion  
26 powered engine which is licensed for operation on public roads and/or streets.  
27 Motor Vehicles exempted from the inspection requirements of this Regulation are  
28 listed in Section 6.4 of this Regulation.

29 Non-certified Inspector: Any person who has not been certified by the Department  
30 to perform official emissions tests.

31 OBD: On Board Diagnostic refers to a vehicle's monitoring and diagnostic  
32 capabilities of its emissions systems.

1 Publicly-owned Vehicles: A motor vehicle owned by a government entity,  
2 including but not limited to the federal government or any agency thereof, the  
3 State of Utah or any agency or political subdivision thereof.

4 Readiness: Readiness is used to identify the state of a vehicle's emissions  
5 monitors as they are tested. Readiness does not indicate whether the monitors  
6 passed or failed the test, it only indicates whether or not the test has been run for  
7 any particular monitor.

8 Referee Inspection: An emissions inspection performed at the I/M Technical  
9 Center for the purpose of resolving disputes or overriding inspection criteria for  
10 cause.

11 Regulation: A regulation of the Bear River Health Department for a vehicle  
12 emissions inspection and maintenance program.

13 Rejection: A condition where a vehicle subject to an OBD inspection has not met  
14 the Readiness requirements as set forth by this Regulation. The vehicle has not  
15 failed the inspection but it must be driven additional miles until Readiness  
16 monitors are set "ready" or repairs have been made allowing readiness flags to set  
17 ready.

18 Station: An I/M Program Station.

19 Training Program: A formal program administered, conducted, or approved by the  
20 Department for the education of emission inspectors in basic emission control  
21 technology, inspection procedures, I/M Program policies, procedures, and this  
22 Regulation.

23 Vehicle Emission Control Information Label (VECI Label): An EPA required  
24 label found on a vehicle that contains the manufacturer's name and trademark,  
25 and an unconditional statement of compliance with EPA emission regulations.  
26 The label often contains a list of emissions control devices found on the vehicle.

27 Vehicle Emissions Inspection and Maintenance Program: The program established  
28 by the Department pursuant to Section 41-6a-1642 Utah Code Annotated, 1953,  
29 as amended, and Cache County Code Chapter 10.20.

30 Waiver: Documentation of proof that a vehicle which has not been able to meet  
31 applicable test requirements, has met the applicable repair and/or adjustment  
32 requirements of Section 9.5 of this Regulation.

## 33 2.0 PURPOSE

34 It is the purpose of this Regulation to reduce air pollution levels in Cache County by  
35 requiring inspections of in-use motor vehicles and by requiring emission related repairs  
36 and/or adjustments for those vehicles that fail to meet the prescribed standards so as to:

- 1           2.1     Protect and promote the public health, safety, and welfare;
- 2           2.2     Improve air quality;
- 3           2.3       Comply with the applicable federal requirements for I/M Programs as defined  
4           in 40 CFR Part 51, Subpart S;
- 5           2.4       Comply with the law enacted by the Legislature of the State of Utah, Sections  
6           416a-1642 Utah Code Annotated, 1953, as amended; and
- 7           2.5       Comply with Cache County Code Chapter 10.20, Vehicle Emissions and  
8           Maintenance Program, as amended.

### 9           **3.0    AUTHORITY AND JURISDICTION OF THE DEPARTMENT**

10          3.1     Under Chapter 10.20.020(C) of Cache County Code, the Cache County Council  
11          (hereafter, Council) delegates its authority as an administrative body under Section 41-  
12          6a-1642, Utah Code Annotated, 1953, as amended, to the Bear River Board of Health  
13          (hereafter Board), to address all issues pertaining to the adoption and administration of  
14          the Vehicle Emissions Inspection and Maintenance Program (hereafter I/M Program).

15          3.2     Under Chapter 10.20.020(D) of Cache County Code, the Council directs the  
16          Board to adopt and promulgate regulations to ensure compliance with State  
17          Implementation Plan requirements with respect to an I/M Program.

18          3.3     The Board is authorized to make standards and regulations pursuant to Section  
19          26A-1-121(1) of the Utah Code Annotated, 1953, as amended.

20          3.4     The Board is authorized to establish and collect fees pursuant to Section 26A-  
21          1114(1)(h)(i) of the Utah Code Annotated, 1953, as amended.

22          3.5     All aspects of the I/M Program within Cache County enumerated in Section  
23          2.0 of this Regulation shall be subject to the direction and control of the Bear River  
24          Health Department (hereafter Department).

### 25          **4.0    POWERS AND DUTIES**

26          4.1     The Department shall be responsible for the enforcement and administration of  
27          this Regulation and any other powers vested in it by law and shall:

28               4.1.1     Make policies and procedures necessary to ensure that the provisions of  
29               this Regulation are met and that the purposes of this Regulation are accomplished;

30               4.1.2     Require the submission of information, reports, plans, and  
31               specifications from I/M Program Stations as necessary to implement the  
32               provisions, requirements, and standards of this Regulation;

1 4.1.3 Issue permits, certifications, and charge fees as necessary to implement  
2 the provisions, requirements, and standards of this Regulation; and

3 4.1.4 Perform audits of any I/M Program Station, issue orders and/or  
4 notices, hold hearings, and levy administrative penalties, as necessary to effect  
5 the purposes of this Regulation.

6 4.2 The Department may suspend, revoke, or deny a permit, subject to the  
7 Penalty Schedule in Appendix C, of an I/M Program Station and/or require the  
8 surrender of the permit of such I/M Program Station upon showing that:

9 4.2.1 A vehicle was inspected and issued a Certificate of Compliance by the  
10 station personnel that did not, at the time of inspection, comply with all applicable  
11 policies, procedures, and this Regulation;

12 4.2.2 A vehicle was inspected and failed by the I/M Program Station when,  
13 in fact, the vehicle was determined by the Department to be in such condition that  
14 it did comply with the requirements of this Regulation;

15 4.2.3 The I/M Program Station has violated any provisions of this  
16 Regulation, or any rule, regulation, or Department policy properly promulgated  
17 for the operation of an I/M Program Station;

18 4.2.4 The I/M Program Station is not operating from a location specified on  
19 the permit;

20 4.2.5 An official inspection was done by a Non-certified Inspector or a  
21 Noncertified Inspector has gained access to the official testing portion of the  
22 Certified Testing Equipment;

23 4.2.6 The Certified Emissions Inspector logged in to the official testing  
24 portion of the Certified Testing Equipment did not perform the inspection;

25 4.2.7 The Certified Testing Equipment has been tampered with or altered in  
26 any way contrary to the certification and maintenance requirements of the  
27 Certified Testing Equipment;

28 4.2.8 The I/M Program Station denies access to a representative of the  
29 Department to conduct an audit or other necessary business during regular  
30 business hours;

31 4.2.9 The I/M fee has been determined by the Department to be  
32 discriminatory in that different fees are assessed dependent upon vehicle  
33 ownership, vehicle make or model, owner residence, etc; or

34 4.2.10 The I/M Program Station that also contracts with the State of Utah as an  
35 On the Spot Station renewed a vehicle registration without a valid Certificate of  
36 Compliance for that vehicle. This is considered an intentional pass.

1           4.3           The Department may suspend, revoke, or deny the certificate of a Certified  
2 Emissions Inspector, subject to the Penalty Schedule in Appendix C, and require the  
3 surrender of this certificate upon showing that:

4           4.3.1        The Certified Emissions Inspector caused a Certificate of Compliance  
5 to be issued without an approved inspection being made;

6           4.3.2        The Certified Emissions Inspector denied the issuance of a Certificate  
7 of Compliance to a vehicle that, at the time of inspection, complied with the law  
8 for issuance of said certificate;

9           4.3.3        The Certified Emissions Inspector issued a Certificate of Compliance  
10 to a vehicle that, at the time of issuance, was in such a condition that it did not  
11 comply with this Regulation;

12          4.3.4        Inspections were performed by the Certified Emissions Inspector, but  
13 not in accordance with applicable policies, procedures, and this Regulation;

14          4.3.5        The Certified Emissions Inspector allowed a Non-certified Inspector to  
15 perform an official Inspection or gain access to the official testing portion of the  
16 Certified Testing Equipment;

17          4.3.6        The Certified Emissions Inspector logged in to the official testing  
18 portion of the Certified Testing Equipment did not perform the inspection;

19          4.3.7        The Certified Emissions Inspector signed an inspection form or  
20 certificate stating that he had performed the emissions test when, in fact, he did  
21 not; or

22          4.3.8        The Certified Emissions Inspector employed at an I/M Program Station  
23 that also contracts with the State of Utah as an On the Spot Station renewed a  
24 vehicle registration without a valid Certificate of Compliance for that vehicle.  
25 This is considered an intentional pass.

26          4.4           The Department shall respond, according to the policies and procedures of the  
27 Department, to public complaints regarding the fairness and integrity of the inspections  
28 they receive and shall provide a method that inspection results may be challenged if there  
29 is a reason to believe them to be inaccurate.

## 30   5.0   SCOPE

31           It shall be unlawful for any person to fail to comply with any policy, procedure, or  
32 regulation promulgated by the Department, unless expressly waived by this Regulation.

## 6.0 GENERAL PROVISIONS

Subject to the exceptions in Section 6.4 and pursuant to the schedule in Section 6.1, motor vehicles that are registered in Cache County, or principally operated within Cache County shall be subject to an emission inspection. Owners of vehicles that meet the requirements of Section 6.2 or 6.3 shall comply with the inspection requirements regardless of the county of registration.

6.1 Motor vehicles are subject to a biennial emissions inspection. Emissions inspections will be required in odd-numbered years for a vehicle with an odd-numbered model year. Emissions inspections will be required in even-numbered years for a vehicle with an even-numbered model year.

6.1.1 A Certificate of Compliance, or evidence that the motor vehicle is exempt from the I/M Program requirements (as defined in Section 6.4) shall be presented to the Cache County Assessor or the Utah State Tax Commission as conditions precedent to registration or renewal of registration of a motor vehicle in odd-numbered years for a vehicle with an odd-numbered model year. Persons who register a vehicle without meeting the requirements listed may be subject to the penalties referenced in Section 14 of this Regulation.

6.1.2 A Certificate of Compliance, or evidence that the motor vehicle is exempt from the I/M Program requirements (as defined in Section 6.4) shall be presented to the Cache County Assessor or the Utah State Tax Commission as conditions precedent to registration or renewal of registration of a motor vehicle in even-numbered years for a vehicle with an even-numbered model year. Persons who register a vehicle without meeting the requirements listed may be subject to the penalties referenced in Section 14 of this Regulation.

6.1.3 The Air Pollution Control Fee shall be paid annually, as per Chapter 10.20.040(E) of Cache County Code, (see also Section 6.7 of this Regulation) as conditions precedent to registration or renewal of registration of a motor vehicle.

6.1.4 A Certificate of Compliance shall be valid for a period of time in accordance with Section 41-6a-1642(10) Utah Code Annotated, 1953, as amended.

6.2 Publicly-Owned Vehicles. Owners of publicly-owned vehicles shall comply with the inspection program requirements. Federally-owned vehicles and vehicles of employees operated on a federal installation that do not require registration in the State of Utah shall comply with the emissions testing requirements.

6.3 Vehicles of employees and/or students parked at a college or university that do not require registration in Cache County shall comply with the emissions testing requirements as authorized by 41-6a-1642(5)(a) Utah Code Annotated, 1953, as amended.

1           6.3.1     College or university parking areas that are metered or for which  
2           payment is required per use are not subject to the requirements in Section 6.3.

3           6.4        Vehicle Exemption. The following vehicles are exempt from these emissions  
4           testing requirements:

5           6.4.1     An implement of husbandry as provided in Section 41-1a-102 Utah  
6           Code Annotated, 1953, as amended;

7           6.4.2     A motor vehicle that meets the definition of a farm truck as provided in  
8           Section 41-1a-102 Utah Code Annotated, 1953, as amended, and has a gross  
9           vehicle weight rating of 12,001 pounds or more;

10          6.4.3     A vintage vehicle as defined in Section 41-21-1 Utah Code Annotated,  
11          1953, as amended;

12          6.4.4     A custom vehicle as defined in Section 41-6a-1507 Utah Code  
13          Annotated, 1953, as amended;

14          6.4.5     A pickup truck, as defined in Section 41-1a-102 Utah Code Annotated,  
15          1953, as amended, with a gross vehicle weight rating of 12,000 pounds or less  
16          that meets the requirements provided in Section 41-6a-1642(4)(f) Utah Code  
17          Annotated, 1953, as amended;

18          6.4.6     A motorcycle as defined in Section 41-1a-102 Utah Code Annotated,  
19          1953, as amended;

20          6.4.7     A motor vehicle powered solely by electric power;

21          6.4.8     Any gasoline or non-diesel based Alternative Fuel powered vehicle of  
22          model year 1995 or older;

23          6.4.9     Any gasoline or non-diesel based Alternative Fuel powered vehicle,  
24          with a gross vehicle weight rating greater than 8,500 pounds, and of model year  
25          2007 or older;

26          6.4.10 Any gasoline or non-diesel based Alternative Fuel powered vehicle, with a  
27          gross vehicle weight rating greater than 14,000 pounds, and of model year 2008  
28          or newer;

29          6.4.11 Any vehicle that is less than six years old on January 1 based on the age of  
30          the vehicle as determined by the model year identified by the manufacturer;

31          6.4.12 Any diesel or diesel based Alternative Fuel powered vehicle 1997 and  
32          older;

33          6.4.13 Any diesel or diesel based Alternative Fuel powered vehicle with a gross  
34          vehicle weight rating greater than 14,000 pounds; and

1 6.4.14 Any vehicle that qualifies for exemption under Section 41-6a-1642 Utah  
2 Code Annotated, 1953, as amended;

3 6.4.15 Any current use “Authorized emergency vehicle” as defined by Section  
4 41-6a-102 Utah Code Annotated, 1953, as amended

5 6.5 If a vehicle exempted by Section 6.4 of this Regulation is brought to the Certified  
6 Emissions Inspector for an official Inspection it shall be the responsibility of the Certified  
7 Emissions Inspector to inform the owner/operator of the vehicle that the vehicle is not  
8 required to have an official Inspection.

9 6.6 Official Signs.

10 6.6.1 All I/M Program Stations shall display in a conspicuous location on  
11 the premises an official sign provided and approved by the Department; The  
12 readiness requirements for an OBD test as referenced in Appendix D shall be  
13 posted in a conspicuous place on the station’s premises;

14 6.6.2 The station shall post on a clear and legible sign and in a conspicuous  
15 place at the station, the fees charged by that station for the performance of the  
16 emissions inspection;

17 6.6.3 The free re-inspection policy as referenced in Section 9.4 shall be  
18 posted in a conspicuous place on the station’s premises;

19 6.6.4 The signs required by Sections 6.6.1 through 6.6.4 shall be located so  
20 as to be easily in the public view.

21 6.7 Fees.

22 6.7.1 The fees assessed upon I/M Program Stations and Certified Emissions  
23 Inspectors shall be determined according to a fee schedule adopted by the Board.  
24 The fee schedule is referenced in Appendix A to this Regulation and may be  
25 amended by the Board as necessary.

26 6.7.2 An Air Pollution Control Fee is hereby assessed upon every motor  
27 vehicle registered in Cache County as per Chapter 10.20.040 of Cache County  
28 Code. The fee will be assessed annually at the time of registration of the vehicle.

29 6.7.2.1 This fee assessment is included upon all motorized vehicles  
30 including those that are exempted from the inspection  
31 requirements of this Regulation by Section 6.4.

32 6.7.2.2 A motor vehicle that is exempt from the registration fee,  
33 and a commercial vehicle with an apportioned registration  
34 shall be exempt from this fee as per Section 41-1a-1223,  
35 Utah Code Annotated, 1953, as amended and Chapter  
36 10.20.040 of Cache County Code.

1 6.7.3 I/M Program Stations may charge a fee for the required service. The fee  
2 may not exceed, for each vehicle inspected, the amount set by the Board and  
3 referenced in Appendix A of this Regulation.

4 6.7.3.1 The inspection fee pays for a complete inspection leading  
5 to a Certificate of Compliance, a Rejection, or a failure. If  
6 a vehicle fails, or is rejected from an inspection, the  
7 owner/operator is entitled to one free re-inspection if he  
8 returns to the I/M Program Station that performed the  
9 original inspection within fifteen (15) calendar days from  
10 the date of the initial inspection. The I/M Program Station  
11 shall extend the fifteen day free re-inspection to  
12 accommodate the vehicle owner/operator if the I/M  
13 Program Station is unable to schedule the retest of the  
14 vehicle within the fifteen day time period. The inspection  
15 fee shall be the same whether the vehicle passes or fails the  
16 emission test.

17 6.7.4 If a vehicle fails the inspection and is within the time and mileage  
18 requirements of the federal emissions warranty contained in section 207 of the  
19 Federal Clean Air Act, the Certified Emissions Inspector shall inform the  
20 owner/operator that he may qualify for warranty coverage of emission related  
21 repairs as provided by the vehicle manufacturer and mandated by the Federal  
22 Environmental Protection Agency (see 40 CFR Part 85, Subpart V).

## 23 6.8 Compliance Assurance List.

24 6.8.1 The Department reserves the right to recall a vehicle and perform a  
25 Compliance Assurance Inspection at the I/M Technical Center for the following  
26 reasons:

27 6.8.1.1 Suspected fraudulent registration;

28 6.8.1.2 Suspected fraudulent emissions inspection;

29 6.8.1.3 Suspected tampering of emissions control devices;

30 6.8.1.4 Violations of Section 41-6a-1626, Utah Code Annotated, 1953, as  
31 amended, regarding visible emissions; and

32 6.8.1.5 Any item listed in Appendix D, Test Procedures, that cause the  
33 vehicle to be flagged during an emissions inspection.

34 6.8.2 The Department shall create and maintain a list of vehicles that are  
35 subject to a Compliance Assurance Inspection at the I/M Technical Center.

1 6.8.2.1 The Compliance Assurance Inspection criteria listed in Appendix  
2 D, Test Procedures, shall be followed.

3 6.8.2.2 A vehicle that passes the Compliance Assurance Inspection may be  
4 removed from the Compliance Assurance List by Department personnel.

5 6.8.2.3 A vehicle that fails the Compliance Assurance Inspection may be  
6 subject to penalties as described in Section 14 of this regulation.

## 7 7.0 PERMIT REQUIREMENTS OF THE VEHICLE EMISSIONS 8 I/M PROGRAM STATION

### 9 7.1 Permit Required.

10 7.1.1 No person shall in any way represent any place as an official I/M  
11 Program Station unless the station is operated under a valid permit issued by the  
12 Department.

13 7.1.2 The Department is authorized to issue or deny permits for I/M Program  
14 Stations.

15 7.1.3 No permit for any official I/M Program Station may be assigned,  
16 transferred, or used by any person other than the original owner identified on the  
17 permit application for that specific I/M Program Station.

18 7.1.4 The permit shall be posted in a conspicuous place within public view  
19 on the premises.

20 7.1.5 Application for an I/M Program Station permit shall be made to the  
21 Department upon a form provided by the Department. No permit shall be issued  
22 unless the Department finds that the facilities, and equipment of the applicant  
23 comply with the requirements of this Regulation and that competent personnel,  
24 certified under the provisions of Section 8.0, are employed and will be available  
25 to make inspections, and the operation thereof will be properly conducted in  
26 accordance with this Regulation.

27 7.1.5.1 An I/M Program Station shall notify the Department and  
28 cease any emission testing if the station does not have a  
29 Certified Emissions Inspector employed.

30 7.1.5.2 An I/M Program Station shall notify the Department upon  
31 termination and/or resignation of any Certified Emissions  
32 Inspector employed by the station.

33 7.1.5.3 An I/M Program Station shall comply with all the terms  
34 stated in the permit application and all the requirements of  
35 this Regulation.



1 8.1.4 An applicant shall complete a Department approved training course and  
2 shall demonstrate knowledge and skill in the performance of emission testing and  
3 use of the Certified Testing Equipment. Such knowledge and skill shall be shown  
4 by passing at minimum:

5 8.1.4.1 Operation and purposes of emission control systems;

6 8.1.4.2 Inspection procedures as outlined in this Regulation and  
7 prompted by the Certified Testing Equipment ;

8 8.1.4.3 Operation of the Certified Testing Equipment;

9 8.1.4.4 The provisions of Section 207(b) warranty provisions of  
10 the Federal Clean Air Act, and other federal warranties;

11 8.1.4.5 The provisions of this Regulation and other applicable  
12 Department policies and procedures; and

13 8.1.4.6 A performance qualification test including but not limited  
14 to the following:

15 (a) Demonstration of skill in proper use, care, and  
16 maintenance, of the Certified Testing Equipment;

17 (b) Demonstration of ability to conduct the inspection; and

18 (c) Demonstration of ability to accurately enter data in the  
19 Certified Testing Equipment.

20 8.1.5 The Department shall issue a Certified Emissions Inspector  
21 Certificate to an applicant upon successful completion of the requirements of  
22 this section.

23 8.1.6 The Certified Emissions Inspector Certificates are and remain the  
24 property of the Department, only their use and the license they represent is  
25 tendered.

26 8.1.7 Certified Emissions Inspector Certifications shall not be transferred  
27 from one person to another person.

## 28 8.2 Recertification Requirements for Certified Emissions Inspectors

29 8.2.1 The Department may renew certifications for an existing Certified  
30 Emissions Inspector after a properly completed renewal form is submitted,  
31 reviewed, and approved, the recertification requirements have been completed,  
32 the fees are paid and the Certified Emissions Inspector has complied with this  
33 Regulation.

1 8.2.2 Certified Emissions Inspectors shall be required to recertify annually.  
2 Failure to recertify shall result in suspension or revocation of the Certification as  
3 described in this Regulation.

4 8.2.3 Certified Emissions Inspectors shall complete a Department approved  
5 refresher course every 2 years. Applicants for recertification shall complete a  
6 Department approved refresher course no more than sixty days prior to the date of  
7 expiration.

### 8 8.3 Certification Expiration

9 8.3.1 The Certified Emissions Inspector Certification shall be issued  
10 annually and shall expire on the last day of the month one year from the month  
11 of issue. The certification shall be renewable sixty days prior to the date of  
12 expiration.

13 8.3.2 It is the responsibility of the Certified Emissions Inspector to pursue  
14 the renewal of the Certification.

### 15 8.4 Certified Emissions Inspector Certification Denial, Suspension and Revocation

16 8.4.1 Certified Emissions Inspector Certifications may be suspended or  
17 revoked by the Department for violations of this Regulation.

18 8.4.2 Suspension or revocation of Certified Emissions Inspector  
19 Certifications shall follow the provisions of Appendix C of this Regulation.

20 8.4.3 The Department may deny issuance of a Certified Emissions Inspector  
21 Certification to an individual that works as an emissions inspector in another  
22 county in Utah and is currently under suspension or revocation in that program.

## 23 9.0 INSPECTION PROCEDURE

24 9.1 The official emissions inspection shall be solely performed by a Certified  
25 Emissions Inspector at an I/M Program Station, and Department approved inspection  
26 procedures, as referenced in this section and Appendix D, Test Procedures, are to be  
27 followed.

28 9.2 A complete official test must be performed any time an inspection is requested.  
29 The Certified Emissions Inspector shall not perform any part of the inspection without  
30 initiating an official test on the Certified Testing Equipment.

31 9.3 The Certified Emissions Inspector shall perform the official vehicle emissions  
32 test using the proper testing procedure.

33 9.3.1 All gasoline, and non-diesel based Alternative Fuel powered vehicles,  
34 including Bi-Fuel vehicles, model year 1996 and newer, with a gross vehicle

1 weight rating 8,500 pounds or less, shall be tested as specified in Appendix D,  
2 OBDII Test Procedures, unless specifically exempted by this Regulation.

3 9.3.2 All gasoline and non-diesel based Alternative Fuel powered vehicles,  
4 including Bi-Fuel vehicles, model year 2008 and newer with a gross vehicle  
5 weight rating greater than 8,500 pounds and less than 14,001 pounds shall be  
6 tested as specified in Appendix D, OBDII Test Procedures, unless specifically  
7 exempted by this Regulation.

8 9.3.3 All diesel and diesel based Alternative Fuel powered vehicles model  
9 year 1998 and newer with a gross vehicle weight rating less than 14,001 pounds  
10 shall be tested as specified in Appendix D, Diesel Test Procedures, unless  
11 specifically exempted by this Regulation.

## 12 9.4 Retesting Procedures

13 9.4.1 If the vehicle fails the initial emissions inspection, the  
14 owner/operator shall have fifteen calendar days in which to  
15 have repairs or adjustments made and return the vehicle to  
16 the I/M Program Station that performed the initial  
17 inspection for one (1) free re-inspection.

18 9.4.2 If the vehicle is Rejected from the initial emissions  
19 inspection for failure to complete Readiness requirements,  
20 the owner/operator shall have fifteen calendar days in  
21 which to return the vehicle to the I/M Program Station that  
22 performed the initial inspection for one (1) free  
23 reinspection.

24 9.4.3 If the vehicle owner/operator does not return to the I/M Program  
25 Station that performed the initial inspection within fifteen calendar days the I/M  
26 Program Station is under no obligation to offer a free re-inspection.

## 27 9.5 Waivers

28 9.5.1 A Waiver may be granted and a Certificate of Compliance issued for  
29 1996 and newer model year vehicles if all of the following requirements are met:

30 9.5.1.1 Air pollution control devices identified in the VECI Label  
31 are in place and apparently operable on the vehicle. If the  
32 VECI Label is missing, the Department may use reference  
33 material to identify the air pollution control devices  
34 required for the vehicle. If the devices have been removed  
35 or rendered inoperable, they shall be replaced or repaired  
36 before a Waiver is granted;

1 9.5.1.2 The vehicle continues to fail the inspection after \$200.00  
2 has been spent on acceptable emissions related repair costs  
3 for that specific vehicle, and proof of repair costs for that  
4 specific vehicle have been provided to the Department in  
5 the form of an itemized bill, invoice, work order, manifest,  
6 or statement in which emissions related parts are  
7 specifically identified. If repairs are made at a repair station  
8 that employs individuals with current ASE L1, ASE A8, or  
9 another certification approved by the Department, the cost  
10 of labor may be included in the \$200.00;

11 9.5.1.3 The vehicle is not within the time and mileage  
12 requirements of the federal emissions warranties. Any  
13 vehicle that is within time and mileage requirements of the  
14 federal emissions warranties shall not be eligible for a  
15 Waiver, but shall be repaired to pass the testing  
16 requirements; and

17 9.5.1.4 A vehicle that is Rejected from the OBD Inspection may qualify  
18 for a Waiver if it meets requirements set forth in  
19 Appendix F, Waivers for “Not Ready” Vehicles.

20 9.5.2 As used in 9.5.1, acceptable emissions related repairs:

21 9.5.2.1 May include repairs performed up to 60 days prior to the  
22 official emissions test, provided appropriate documentation  
23 is supplied to the Department;

24 Diagnostic work performed, including Diagnostic Trouble  
25 Codes if applicable, must be properly documented to  
26 justify any repairs performed;

27 9.5.2.2 Does not include the fee paid for the test;

28 9.5.2.3 Does not include costs associated with the repairs or  
29 replacements of air pollution control equipment on the  
30 vehicle if the need for such adjustment, maintenance,  
31 replacement, or repair is due to disconnection of, tampering  
32 with, or abuse of the emissions control systems;

33 9.5.2.4 Refers to repairs, maintenance, and diagnostic evaluations  
34 done in accordance with manufacturer’s specifications, to  
35 the extent that the purpose is to reduce emissions;

36 9.5.2.5 Repairs performed on OBD compliant vehicles should be  
37 directly related to the diagnostic trouble codes identified by  
38 the vehicle and by further diagnostic tests on the vehicle;



1 11.1.3 It shall be illegal for any person to gain access to any Department or  
2 Contractor controlled portions of Certified Testing Equipment without approval  
3 by the Department and/or Contractor.

## 4 12.0 QUALITY ASSURANCE

5 12.1 A quarterly inspection shall be made by a representative of the Department to  
6 verify compliance with this Regulation for each I/M Program Station. During the time of  
7 the inspection by the Department, the Department's representative shall have exclusive  
8 access to the Certified Testing Equipment. Inspections may be performed utilizing  
9 technology integrated into the Certified Testing Equipment.

10 12.2 An annual covert inspection and audit shall be made by a representative of the  
11 Department to verify compliance with this Regulation for each I/M Program Station.

12 12.3 The Department may increase the frequency of inspections for I/M Program  
13 Stations and/or Certified Emissions Inspectors if the Department receives information of  
14 a violation of this Regulation.

15 12.4 The Department shall regularly monitor I/M Program Stations and/or Certified  
16 Emissions Inspectors through inspection records and/or technology integrated into the  
17 Certified Testing Equipment.

## 18 13.0 DISCIPLINARY PENALTIES AND RIGHT TO APPEAL

19 13.1 When the Department, or its representative(s), receives information of a  
20 violation of any regulation contained herein which may result in a permit denial,  
21 revocation, or suspension, the Department shall notify the affected entity, in writing,  
22 informing the entity of the violation and penalties to be enforced. The affected entity may  
23 request a hearing within ten calendar days of the Department giving notice of the  
24 potential permit denial, revocation, or suspension. Only a written request for a hearing  
25 shall be honored by the Department. No appeal may be made on a formal warning.

26 13.1.1 In considering the appropriate administrative action to be taken as  
27 indicated in Appendix C, the Director shall consider the following:

28 13.1.1.1 whether the violation was unintentional or careless;

29 13.1.1.2 the frequency of the violation or violations;

30 13.1.1.3 the inspection and covert inspection history of the I/M  
31 Program Station and the Certified Emissions Inspector;

32 13.1.1.4 whether the fault lies with the I/M Program Station or the  
33 Certified Emissions Inspector.

1 13.1.2 After consideration of the factors in Section 13.1.1 the Director may take  
2 appropriate administrative action as indicated in Appendix C against either the  
3 I/M Program Station, the Certified Emissions Inspector, or both.

4 13.2 Appeals Hearing Procedure:

5 13.2.1 An appeals hearing shall be held at the request of the affected entity in  
6 order to determine the accuracy of information obtained by the Department and  
7 whether there are mitigating factors which would justify a reduction of the  
8 imposed penalties.

9 13.2.2 The requesting party may bring to the hearing any witnesses and any  
10 evidence believed to be pertinent to the disciplinary action.

11 13.2.3 The appeal shall be heard by the Vehicle Inspection and Maintenance  
12 Appeal Board, hereafter I/M Board, consisting of at least three persons, who are  
13 not employees of Bear River Health Department, appointed by the Board. The  
14 I/M Board shall have the discretion to determine which witnesses shall be heard  
15 and what evidence is relevant.

16 13.2.4 Violations determined to be intentional or flagrant shall result in the  
17 maximum enforcement of the penalty schedule pursuant to Appendix C.

18 13.2.5 In considering whether to reduce a penalty indicated by Appendix C, the  
19 I/M Board and the Department shall consider the following:

20 13.2.5.1 whether the violation was unintentional or careless;

21 13.2.5.2 the frequency of the violation or violations;

22 13.2.5.3 the inspection and covert inspection history of the I/M  
23 Program Station and the Certified Emissions Inspector;

24 13.2.5.4 whether the fault lies with the I/M Program Station, the  
25 Certified Emissions Inspector, or both.

26 13.3 Written notice of the final determination of the I/M Board, including the I/M  
27 Board's finding under Section 14.2.5, shall be made within ten calendar days after the  
28 conclusion of the appeals hearing.

29 **14.0 PENALTY**

30 14.1 Any person who is found guilty of violating any of the provisions of this  
31 Regulation, either by failing to do those acts required herein or by doing a prohibited act,  
32 shall be guilty of a class B misdemeanor pursuant to Section 26A-1-123, Utah Code  
33 Annotated, 1953, as amended. If a person is found guilty of a subsequent similar

1 violation within two years, he shall be guilty of a class A misdemeanor pursuant to  
2 Section 26A-1-123, Utah Code Annotated, 1953, as amended.

3 14.2 Each day such violation is committed or permitted to continue shall constitute  
4 a separate violation.

5 14.3 The Cache County Attorney's Office may initiate legal action, civil or  
6 criminal, requested by the Department to abate any condition that exists in violation of  
7 this Regulation.

8 14.4 In addition to other penalties imposed by a court of competent jurisdictions,  
9 any person(s) found guilty of violating any of this Regulation shall be liable for all  
10 expenses incurred by the Department.

11 14.5 A Penalty Schedule for permit warning, suspension, or revocation is adopted as  
12 Appendix C and may be amended by the Board as the Board deems necessary to  
13 accomplish the purposes of this Regulation.

14 14.6 The Department shall request that the Utah Division of Motor Vehicles  
15 suspend or revoke a registered vehicle's registration if the vehicle is unable to meet  
16 emissions standards or if the vehicle has not complied with the required emission testing  
17 requirements pursuant to Section 41-1a-110(6), Utah Code Annotated, 1953, as amended.

## 18 15.0 SEVERABILITY

19 If any provision, clause, sentence, or paragraph of this Regulation or the application  
20 thereof to any person or circumstances shall be held to be invalid, such invalidity shall  
21 not affect the other provisions or applications of this Regulation. The valid part of any  
22 clause, sentence, or paragraph of this Regulation shall be given independence from the  
23 invalid provisions or application and to this end the provisions of this Regulation are  
24 hereby declared to be severable.

## 25 16.0 EFFECTIVE DATE

26 This Regulation shall become effective on July 1, 2024 as adopted by the Bear River Board  
27 of Health.



28  
29 Executive Director/Health Officer  
30 Bear River Health Department

1      **APPENDIX A - FEE SCHEDULE**

Permitting of an official I/M Program Station	\$250.00
Annual Renewal of I/M Program Station	\$50.00
Expired I/M Program Station Renewal	\$75.00
I/M Program Station Re-location	\$75.00
Permitting of a Certified Emissions Inspector	\$25.00
Renewal of Certified Emissions Inspector	\$15.00
Expired Certified Emissions Inspector Renewal	\$25.00
Official Station Sign	Cost
APC Fee for 12 month registration	\$3.00
APC Fee for 6 month registration	\$2.25
Emissions Inspection Fee – OBD Test	Market
Emissions Inspection Fee –Tampering	Market



1 APPENDIX C - PENALTY SCHEDULE

<b>Violation</b> (resets after 2 years of no similar violations unless revoked)	<b>1<sup>st</sup> Occurrence</b>	<b>2<sup>nd</sup> Occurrence</b>	<b>3<sup>rd</sup> Occurrence</b>	<b>4<sup>th</sup> Occurrence</b>
<b>Failure to inspect or substituting a vehicle other than the vehicle on the test record – Registering a failing vehicle</b> <i>(intentional pass)</i>	Tech: 180 day suspension and mandatory retraining	Tech: Revocation of permit for up to 5 years		
	Station: 180 day suspension	Station: 270 day suspension	Station: Revocation of inspection station permit for up to 5 years	
<b>Passing a failing vehicle or recording pass for tampering on a tampered vehicle</b> <i>(gross negligence)</i>	Tech: 30 day suspension and mandatory retraining	Tech: 60 day suspension and mandatory retraining	Tech: Revocation of permit for up to 5 years	
	Station: 15 day suspension	Station: 30 day suspension	Station: 60 day suspension	Station: Revocation of permit for up to 5 years
<b>Falsifying an inspection record or emissions certificate or Failing a passing vehicle</b> <i>(intentional)</i>	Tech: 180 day suspension and mandatory retraining	Tech: Revocation of permit for up to 5 years		
	Station: 180 day suspension	Station: 270 day suspension	Station: Revocation of inspection station permit for up to 5 years	
<b>Non-certified person performing test – Using another inspector’s access</b> <i>(gross negligence table)</i>	Tech: 60 day suspension	Tech: 180 day suspension	Tech: Revocation of permit for up to 5 years	
	Station: 60 day suspension	Station: 180 day suspension	Station: Revocation of inspection station permit for up to 5 years	
<b>Inaccurate or incomplete data entry</b> <i>(incompetence)</i>	Tech: Formal warning and mandatory retraining	Tech: 30 day suspension and mandatory retraining	Tech: 90 day suspension and mandatory retraining	Tech: Revocation of permit for up to 5 years
	Station: Formal warning	Station: 15 day suspension	Station: 45 day suspension	Station: Revocation of inspection station permit for up to 5 years
<b>Failure to follow proper test procedures – Other regulation violations</b> <i>(incompetence)</i>	Tech: Formal warning and mandatory retraining	Tech: 30 day suspension and mandatory retraining	Tech: 90 day suspension and mandatory retraining	Tech: Revocation of permit for up to 5 years
	Station: Formal warning	Station: 15 day suspension	Station: 45 day suspension	Station: Revocation of inspection station permit for up to 5 years

## APPENDIX D - TEST PROCEDURES

### **OBDII Test Procedures for gasoline and non-diesel based Alternative Fuel powered vehicles**

- 1 The Certified Emissions Inspector shall verify the following items from the vehicle and accurately record them in the Certified Testing Equipment:
  - 1.1 Vehicle Identification Number (VIN)
  - 1.2 Gross Vehicle Weight Rating (GVWR)
  - 1.3 Model year
  - 1.4 Make
  - 1.5 Model
  - 1.6 Fuel Type
  - 1.7 Engine size
  - 1.8 Number of cylinders
  - 1.9 Certification standard (EPA or California)
- 2 The Certified Emissions Inspector shall visually examine the instrument panel to determine if the Malfunction Indicator Light (MIL) illuminates, at least briefly, when the ignition key is turned to the “key on, engine off” (KOEO) position. The visual result shall be accurately recorded in the Certified Testing Equipment.
- 3 The Certified Emissions Inspector shall locate the Diagnostic Link Connector (DLC) on the vehicle being tested. The vehicle should be connected to the Certified Testing Equipment when prompted.
  - 3.1 If the DLC is missing, has been tampered with, or is otherwise inoperable, the vehicle fails the test and shall be repaired.
  - 3.2 If the DLC is inaccessible, the problem must be remedied before the test can continue.
- 4 When prompted by the Certified Testing Equipment the Certified Emissions Inspector should start the engine so the vehicle is in the “key on, engine running” (KOER) condition and follow the screen prompts until the test is complete.
- 5 For 1996-2000 model year vehicles two (2) supported readiness monitors are allowed to be “not ready”. For 2001 and newer vehicles one (1) supported readiness monitor is allowed to be “not ready”. If the “not ready” status exceeds these numbers the vehicle must be driven additional miles or have appropriate repairs made.

- 5.1 A vehicle that fails the initial inspection for a catalyst related fault (i.e., P0420P0439) must have the catalyst monitor set to “ready” upon re-inspection.
- 6 If the MIL is commanded on while the engine is running, regardless of the presence of Diagnostic Trouble Codes (DTC), the vehicle will fail the test and will require repairs.
- 7 Certain vehicles have been determined to be OBDII deficient. The Certified Testing Equipment software will maintain a list of these vehicles and perform a modified OBDII test.
- 8 A vehicle must meet the requirements of Section 41-6a-1626, Utah Code Annotated 1953, as amended, regarding visible emissions in order to qualify for a Certificate of Compliance.
- 9 Certain vehicles will be flagged by the testing software during the inspection and may be recalled to the I/M Technical Center for a Compliance Assurance Inspection. Vehicles will be flagged for the following items:
  - 9.1 Mismatch between entered VIN and OBD VIN;
  - 9.2 Any of the following readiness monitors being unsupported: Misfire, fuel system, component, catalyst, and/or oxygen sensor;
  - 9.3 A change in supported readiness monitors since the last inspection;
  - 9.4 A change in communication protocol since the last inspection;
  - 9.5 A change in OBD VIN since the last inspection;
  - 9.6 The presence of an OBD VIN in a vehicle that does not support OBD VINs;
  - 9.7 The absence of an OBD VIN in a vehicle that supports OBD VINs; or
  - 9.8 A change in PID count since the last inspection.
- 10 Certain vehicles might not communicate with the Certified Testing Equipment. These vehicles will be referred to the I/M Technical Center for a Referee Inspection.
- 11 A vehicle owner/operator that challenges the results of an official emissions inspection may request a Referee Inspection at the I/M Technical Center.

## **Diesel and diesel based Alternative Fuel Powered Vehicles Test Procedures**

All diesel powered vehicles 2007 and newer, with a gross vehicle weight rating less than 14,001 pounds, shall be tested as follows:

- 1 The Certified Emissions Inspector shall verify the following items from the vehicle and accurately record them in the Certified Testing Equipment:
  - 1.1 Vehicle Identification Number (VIN)
  - 1.2 Gross Vehicle Weight Rating (GVWR)
  - 1.3 Model year
  - 1.4 Make
  - 1.5 Model
  - 1.6 Fuel Type
  - 1.7 Engine size
  - 1.8 Number of cylinders
  - 1.9 Certification standard (EPA or California)
- 2 The Certified Emissions Inspector shall visually examine the instrument panel to determine if the Malfunction Indicator Light (MIL) illuminates, at least briefly, when the ignition key is turned to the “key on, engine off” (KOEO) position. The visual result shall be accurately recorded in the Certified Testing Equipment.
- 3 The Certified Emissions Inspector shall locate the Diagnostic Link Connector (DLC) on the vehicle being tested. The vehicle should be connected to the Certified Testing Equipment when prompted.
  - 3.1 If the DLC is missing, has been tampered with, or is otherwise inoperable, the vehicle fails the test and shall be repaired.
  - 3.2 If the DLC is inaccessible, the problem must be remedied before the test can continue.
- 4 When prompted by the Certified Testing Equipment the Certified Emissions Inspector should start the engine so the vehicle is in the “key on, engine running” (KOER) condition and follow the screen prompts until the test is complete.
- 5 Two supported readiness monitors are allowed to be “not ready”. If the “not ready” status exceeds these numbers the vehicle must be driven additional miles or have appropriate repairs made.
  - 5.1 A vehicle that fails the initial inspection for a catalyst related fault (i.e., P0420P0439) must have the catalyst monitor set to “ready” upon re-inspection.

- 6 If the MIL is commanded on while the engine is running, regardless of the presence of Diagnostic Trouble Codes (DTC), the vehicle will fail the test and will require repairs.
- 7 Certain vehicles have been determined to be OBDII deficient. The Certified Testing Equipment software will maintain a list of these vehicles and perform a modified OBDII test.
- 8 A vehicle must meet the requirements of Section 41-6a-1626, Utah Code Annotated 1953, as amended, regarding visible emissions in order to qualify for a Certificate of Compliance.
- 9 Certain vehicles will be flagged by the testing software during the inspection and may be recalled to the I/M Technical Center for a Compliance Assurance Inspection. Vehicles will be flagged for the following items:
  - 9.1 Mismatch between entered VIN and OBD VIN;
  - 9.2 Any of the following readiness monitors being unsupported: Misfire, fuel system, component, NMHC, and/or NOx/SCR;
  - 9.3 A change in supported readiness monitors since the last inspection;
  - 9.4 A change in communication protocol since the last inspection;
  - 9.5 A change in OBD VIN since the last inspection;
  - 9.6 The absence of an OBD VIN; or
  - 9.7 A change in PID count since the last inspection.
- 10 Diesel powered vehicles shall be subject to a visual anti-tampering inspection. The air pollution control devices identified in the Vehicle Emissions Control Information (VECI) label shall be in place and apparently operable on the vehicle. If the decal is missing, reference material may be used to identify the air pollution control devices required for the vehicle.
- 11 Certain vehicles might not communicate with the Certified Testing Equipment. These vehicles will be referred to the I/M Technical Center for a Referee Inspection.
- 12 A vehicle owner/operator that challenges the results of an official emissions inspection may request a Referee Inspection at the I/M Technical Center.

All diesel powered vehicles 1998-2006, with a gross vehicle weight rating less than 14,001 pounds, shall be tested as follows:

- 1 The Certified Emissions Inspector shall verify the following items from the vehicle and accurately record them in the Certified Testing Equipment:
  - 1.1 Vehicle Identification Number (VIN)
  - 1.2 Gross Vehicle Weight Rating (GVWR)
  - 1.3 Model year
  - 1.4 Make
  - 1.5 Model
  - 1.6 Fuel Type
  - 1.7 Engine size
  - 1.8 Number of cylinders
  - 1.9 Certification standard (EPA or California)
- 2 Diesel powered vehicles shall be subject to a visual anti-tampering inspection. The air pollution control devices identified in the Vehicle Emissions Control Information (VECI) label shall be in place and apparently operable on the vehicle. If the decal is missing, reference material may be used to identify the air pollution control devices required for the vehicle.
- 3 A vehicle must meet the requirements of Section 41-6a-1626, Utah Code Annotated 1953, as amended, regarding visible emissions in order to qualify for a Certificate of Compliance.
- 4 If the OBDII System is identified on the VECI label, the procedure in Section 2 through 5 shall be followed.
  - 4.1 An inspection of the OBDII System shall be for informational purposes only and will not determine whether a vehicle passes or fails the emission inspection.

### **Compliance Assurance Inspection**

- 1 A vehicle that is referred to the I/M Technical Center for a Compliance Assurance Inspection shall be subject to an official emissions inspection. A visual anti-tampering inspection shall also be included in every Compliance Assurance Inspection. The air pollution control devices listed in the Vehicle Emissions Control Information (VECI) label shall be in place and apparently operable on the vehicle. If the VECI label is missing, reference material may be used to identify the air pollution control devices required for the vehicle.

- 1.1 A vehicle that has missing or tampered air pollution control devices will fail the Compliance Assurance Inspection and will not be issued a Certificate of Compliance.
  - 1.2 A vehicle that has missing or tampered air pollution control devices and has already been issued a Certificate of Compliance will be required to replace or repair the devices. Owners/operators of vehicles that do not comply will be subject to the penalties in this Regulation.
- 2 The Department will use data obtained by the Utah Division of Motor Vehicles and inspection data to determine if a vehicle should be subject to a Compliance Assurance Inspection.
- 3 The owner/operator of a vehicle subject to a Compliance Assurance Inspection will be notified in writing of the requirement to present the vehicle for inspection.

### **Referee Inspection**

- 1 Vehicles may be referred to the I/M Technical Center for a Referee Inspection. During a Referee Inspection the Department may override the normal testing criteria and issue a Certificate of Compliance for the following reasons:
  - 1.1 The vehicle will not communicate with the Certified Testing Equipment but will communicate with other scan tools. The vehicle must meet all other testing requirements including readiness status and MIL status; or
  - 1.2 The vehicle has met the criteria to be issued a Waiver.
- 2 A Referee Inspection may also be performed when an owner/operator believes the emissions inspection performed at an I/M Program Station was not done correctly.

## **APPENDIX E - CERTIFIED TESTING EQUIPMENT STANDARDS**

### **1 General**

This appendix contains specifications for Contractors to design Certified Testing Equipment to be used in the Cache County I/M Program.

#### **1.1 Design Goals**

Certified Testing Equipment must be designed and constructed to provide reliable and accurate service in the automotive service environment. The software must be designed for maximum operational simplicity. The software must prevent users from clearing

Diagnostic Trouble Codes (DTC), changing readiness status, or performing other actions that could change the results of an official emissions test. In addition, the Certified Testing Equipment must include security measures that will prevent unauthorized modifications to the software or inspection data.

These technical specifications contain the minimum requirements for Certified Testing Equipment used to perform official emissions inspections in Cache County, UT.

## 1.2 Manuals

All Certified Testing Equipment sold or leased by the Contractor must be provided with a current copy of a manual that contains, at a minimum, operating instructions, maintenance instructions, and initial startup instructions. The manual may be provided in electronic format and shall be accessible from the Certified Testing Equipment.

## 1.3 Warranty Coverage and Extended Service Agreements

A written warranty coverage agreement, signed by an authorized representative of the Contractor and the I/M Program Station, which provides a complete description of coverage for all systems and components and all Contractor provided services listed below in Contractor Provided Services, must accompany the sale or lease of each unit of Certified Testing Equipment.

The Contractor shall provide a minimum of one-year warranty coverage on each unit of Certified Testing Equipment sold or leased. The one-year warranty coverage shall begin on the date of purchase and shall be included in the unit pricing for the Certified Testing Equipment. An extended warranty shall be made available to the I/M Program Stations that purchase or lease Certified Testing Equipment.

## 1.4 Contractor Provided Services

The Contractor shall provide the following services to the I/M Program Station as part of any sale, lease, or loan of Certified Testing Equipment:

- Delivery, set-up, and verification of proper functionality of the Certified Testing Equipment; and
- Training on the use and maintenance of the Certified Testing Equipment.

The Contractor shall provide the following services to the I/M Program Station during the initial one-year warranty coverage period and thereafter to any I/M Program Station that purchases an extended warranty:

- Full system support and repair as detailed in the warranty coverage agreement; and
- Appropriate service response, either on-site or remote, by a Contractor authorized repair technician within one business day (Saturday shall be considered a business day), excluding Sundays, and national/state holidays (New Year's Day, Human Rights Day, President's Day, Memorial Day, Independence Day, Pioneer Day, Labor Day, Veteran's Day, Thanksgiving, and Christmas), of a request from the I/M Program Station. All system repairs, component replacements, and/or Certified Testing Equipment adjustments must be accomplished within a minimum average response time of 8 business hours after a service request has been initiated. If the completion of this work is not possible within this time period, Certified Testing Equipment of equal quality and specifications must be provided until the malfunctioning unit is properly repaired and returned to service.

### 1.5 Tamper Resistance

The Certified Testing Equipment operators, Department personnel, and Contractor authorized service technicians shall be prevented from changing any inspection results, programs, or data contained on the Certified Testing Equipment. The Contractor shall use appropriate software and/or hardware provisions to protect files and programs.

## 2 – Hardware/Software Requirements

### 2.1 Accessing the OBD System

The Certified Testing Equipment must include hardware and software necessary to access the on-board computer systems of vehicles subject to OBD inspections. This includes the following:

- 1996 and newer gasoline and non-diesel based alternative fuel vehicles with a gross vehicle weight rating of 8,500 pounds or less
- 2008 and newer gasoline and non-diesel based alternative fuel vehicles with a gross vehicle weight rating of 14,000 pounds or less
- 2007 and newer diesel and diesel based alternative fuel vehicles with a gross vehicle weight rating of 14,000 pounds or less

The Certified Testing Equipment shall be compliant with the recommended practices regarding OBD inspections contained in J1962, J1978, and J1979 as published by the Society of Automotive Engineers (SAE). The Certified Testing Equipment must be able to connect to the vehicle's data link connector (DLC) and access, at a minimum, the following OBD data:

- Service modes \$01, \$03, \$06, \$07, \$09, \$0A

The Certified Testing Equipment must be capable of communicating with all OBD vehicles that use, at a minimum, the following communications protocols:

- International Organization for Standardization (ISO) 9141
- Variable Pulse Width (VPW)
- Pulse Width Modulation (PWM)
- Keyword Protocol 2000 (KWP)
- Controller Area Network (CAN)

## 2.2 Barcode Scanner

The Certified Testing Equipment must include a bar code scanner capable of reading both 1D and 2D barcodes. The bar code scanner must be able to read the barcode through a windshield. The barcode scanner must be able to withstand multiple 6.5 foot (2 meter) drops to concrete and be environmentally sealed to withstand the normal operating conditions of an automotive service environment.

The bar code scanner may be a stand alone device or may be integrated into the Certified Testing Equipment.

## 2.3 Camera

Certified Testing Equipment shall be equipped with video capturing equipment. The video capturing equipment must capture video from each official emissions inspection.

# APPENDIX F - WAIVERS FOR "NOT READY" VEHICLES

A vehicle owner may be eligible for a Waiver when their gasoline powered vehicle is “Not Ready” and the following conditions are met:

- 1 The vehicle is not subject to a modified OBDII test because of OBD deficiencies;
- 2 The vehicle has an official test performed showing a “Not Ready” status. The MIL is functioning properly and is not commanded on. No pending codes are stored in the vehicle’s computer.
- 3 A second inspection has been performed showing the following:

- 3.1 Readiness monitors have not changed from “Not Ready” to “Ready”;
  - 3.2 The test dates are separated by at least 7 days and the vehicle has traveled a minimum of 200 miles;
  - 3.3 The MIL is functioning properly and is not commanded on. No pending codes are stored in the vehicle’s computer; and
  - 3.4 A statement is included from a repair station, stating the appropriate diagnostics and manufacturer recommended drive cycles have been performed and the readiness monitors have not been set.
- 4 A third inspection has been performed by a second repair station showing the following:
- 4.1 Readiness monitors have not changed from “Not Ready” to “Ready”;
  - 4.2 The initial and third test dates are separated by at least 14 days and the vehicle has traveled a minimum of 400 miles;
  - 4.3 The MIL is functioning properly and is not commanded on. No pending codes are stored in the vehicle’s computer; and
  - 4.4 A statement is included from a repair station, stating the appropriate diagnostics and manufacturer recommended drive cycles have been performed and the readiness monitors have not been set.
- 5 At least one of the statements must come from the vehicle manufacturer’s dealership repair station. This statement must indicate that the appropriate drive cycles and diagnostics have been performed and the vehicle will not reach a “Ready” status. The dealership must also document that the vehicle’s computer is up to date and functioning properly. The computer must be updated if required or recommended by the manufacturer. If the computer is updated the vehicle must complete the appropriate drive cycles following the update.
- 6 The cost requirements as set forth by this Regulation must be met in order to qualify for a Waiver. In order to count labor the repair station must employ individuals with current ASE L1, ASE A8, or other certifications approved by the Department.

## APPENDIX G - WAIVERS FOR PART UNAVAILABILITY

A vehicle owner may be eligible for a “Parts” Waiver when their vehicle is unable to pass an emissions test with a valid error code and the following conditions are met:

1. The vehicle is not subject to a modified OBDII test because of OBD deficiencies;
2. The vehicle has an official test, performed within the prior 30 days, showing a failing status.
3. The MIL is functioning properly. Pending and/or permanent codes are stored in the vehicle’s computer.

4. A written, signed statement is provided from an ASE certified, currently licensed I/M station stating the part(s) are unavailable for a time exceeding six (6) months
5. A second, separate I/M Station meeting the above criteria issues a written and signed statement detailing the part is unavailable for a time exceeding six (6) months.
6. At least one of the statements must come from the vehicle manufacturer's dealership repair station. This statement must indicate that the part is either backordered or out of production. The dealership must also document that the vehicle's computer is up to date and functioning properly.  
The computer must be updated if required or recommended by the manufacturer.

**Clean Air Act 110(l) Demonstration  
Air Quality Impact of Amendment to  
Bear River Health Department Inspection and Maintenance Program**

---

## **Introduction**

Section 110(l) of the Clean Air Act (CAA) states that the Environmental Protection Agency (EPA) cannot approve a state implementation plan (SIP) revision if the revision would interfere with any applicable requirement concerning attainment and reasonable further progress, or any other applicable requirement of the CAA. When revisions to these rules are made, the CAA requires that an analysis is made to verify that the rule will not be relaxed in a way that would be impermissible under Section 110(l).

Additionally, EPA has given draft guidance that “For example, for certain pollutants such as CO, the Agency could determine that an increase in emissions is not interfering with attainment if ambient levels in an attainment area were well below the National Ambient Air Quality Standard (NAAQS) and not trending upward. Under these conditions, the Agency could conclude that ambient levels are so low that a slight emissions increase is not likely to cause a violation of the NAAQS, hence noninterference has been demonstrated (p.12).”<sup>1</sup> The proposed amendments impact such a small number of vehicle emissions within Cache County that it is not likely to cause a violation.

This demonstration is being submitted for public comment because the Utah Division of Air Quality is proposing amendments to Bear River Health Department’s Inspection and Maintenance Program (I/M) to align with ordinance changes already approved by Bear River Health Department’s Board of Health.

## **Proposed Amendment Summary**

1. This change creates the addition of a Part Unavailability Waiver which would be utilized if a vehicle part was unable to be obtained due to the following described circumstances. The Bear River Health Department I/M may issue a waiver if it can be verified that the part in question or one similar to it is no longer available for sale or unobtainable due to manufacturing circumstances.

**Air Quality Impact Analysis:** This change might result in an additional 4-10 vehicle waivers per year. Due to the small number of vehicles impacted, this change will have no noticeable impact on air quality, air quality modeling for the SIP or attainment of the PM<sub>2.5</sub> NAAQS

2. This change creates the addition of a Mobile Inspection Service option. The amendment includes the deletion of the word “stationary” in the Bear River Health Department’s I/M regulation. The new language in the I/M regulation states: "I/M Program Station: A vehicle

---

<sup>1</sup> U.S. Environmental Protection Agency. (2005). *Demonstrating noninterference under Section 110(l) of the Clean Air Act when revising a State Implementation Plan* (Draft).

**Clean Air Act 110(l) Demonstration  
Air Quality Impact of Amendment to  
Bear River Health Department Inspection and Maintenance Program**

---

Emissions I/M Station that qualifies and has a valid permit, issued by the Department, to operate as an emissions inspection and maintenance station in the I/M Program."

**Air Quality Impact Analysis:** Modifying the I/M regulation to reflect this business innovation has no impact on air quality. It improves the convenience of the inspection process for the customer and may have a positive impact on air quality.

3. This change creates the addition of an exemption for emergency vehicles within the I/M program. The new language in the I/M regulation within the Vehicle Exemption section states: "Any current use "Authorized emergency vehicle" as defined by Section 41-6a-102 Utah Code Annotated,1953, as amended". Codifying this exemption within the Bear River Health Department I/M further allows for the emergency departments to exempt emergency vehicles from inspection. This change is to address issues surrounding the availability of emergency response vehicles in Cache County where the vehicle is running into performance issues. The change is necessary to prevent the decommissioning of critical emergency response vehicles when a part may not be accessed in a timely fashion.

**Air Quality Impact Analysis:** This exemption would impact approximately 102 vehicles within Cache County. To put this number into context the total number of registered vehicles in Cache County as of 2024 is 124,718. Due to the small number of vehicles impacted, this change will have no noticeable impact on air quality, air quality modeling for the SIP or attainment of the 24-hour PM<sub>2.5</sub> NAAQS.

**Table 1.** PM<sub>2.5</sub> values compared to the 24-hour PM<sub>2.5</sub> NAAQS between 2015-2023.

<b>Cache County Air Quality Monitor Data 24 hour PM2.5 Values</b>		
<b>Year</b>	<b>Annual average of 24-hour PM2.5 value for listed year</b>	<b>3 year DV centered on listed year</b>
2015	28.9	33.9
2016	34.0	32.9
2017	36.0	32.6
2018	27.9	33.0
2019	35.1	30.5
2020	28.6	32.4
2021	33.5	30.6
2022	29.9	33.8
2023	38.0	31.0

**Clean Air Act 110(l) Demonstration  
Air Quality Impact of Amendment to  
Bear River Health Department Inspection and Maintenance Program**

---

**Conclusion:** The proposed amendments to the Bear River Health Department I/M will not impact the area's ability to maintain the PM<sub>2.5</sub> NAAQS. Table 1 indicates that the design value in Cache County has been consistently lower than the NAAQS over the last 8 years. The Cache County monitor is not likely to be influenced by the minor amendment and is predicted to continue to maintain the NAAQS. The ambient levels are so low that a slight emissions increase is not likely to cause a violation of the NAAQS, hence noninterference has been demonstrated.

# ITEM 5



State of Utah

SPENCER J. COX  
*Governor*

DEIDRE HENDERSON  
*Lieutenant Governor*

Department of  
Environmental Quality

Kimberly D. Shelley  
*Executive Director*

DIVISION OF AIR QUALITY  
Bryce C. Bird  
*Director*

DAQ-008-25

**MEMORANDUM**

**TO:** Air Quality Board

**THROUGH:** Bryce C. Bird, Executive Secretary

**THROUGH:** Erica Pryor, Rules Coordinator

**FROM:** Alan Humpherys, Minor New Source Review Section Manager

**DATE:** January 22, 2025

**SUBJECT:** PROPOSE FOR FINAL ADOPTION: New Rule R307-209. Portable Aggregate Processing Plants.

---

The Utah Division of Air Quality (DAQ) currently issues approval orders to portable aggregate processing plants. These plants include nonmetallic mineral processing plants, hot mix asphalt plants, and concrete batch plants. These portable aggregate processing plants can temporarily relocate to locations throughout the state under section R307-401-17. These sources must comply with the issued approval orders and temporary relocation letter.

New rule R307-209 codifies the requirements in portable approval orders, and amendments to existing section R307-401-10 will allow these sources to temporarily relocate aggregate equipment without first obtaining an approval order. These rules will not add any new requirements to sources, but save sources the time and money from first obtaining a portable approval order. In addition, the new process will reduce DAQ staff time spent on this work.

On November 6, 2024, the Utah Air Quality Board approved a 30-day public comment period for the proposed new rule. This public comment period ran from December 1, 2024, to December 31, 2024. A public hearing was scheduled for December 18, 2024; however, no request was made to hold the hearing, and it was cancelled in accordance with 63G-3-302. No formal public comments were received during the public comment period; however, we did receive one internal comment from the ATLAS section and as such, one minor change was made to the rule language.

Clarity was added to the rule to indicate that a temporary source would be required to comply with the applicable provisions of R307-801, Utah Asbestos Rule, if that rule applies. A source would be required to comply with R307-801 regardless of whether R307-209 has the applicability language; however, the DAQ wanted to make sure sources are aware of the requirements of R307-801 when operating a portable aggregate processing plant. No other changes were made to the proposed rule.

Recommendation: Staff recommend the Board approve new rule R307-209, Portable Aggregate Processing Plants, as amended, for final adoption.

**State of Utah**  
**Administrative Rule Analysis**  
Revised May 2024

**NOTICE OF SUBSTANTIVE CHANGE**

**TYPE OF FILING:** CPR (Change in Proposed Rule)

**Rule or Section Number:**

**R307-209**

**Filing ID: Office Use Only**

**Date of Previous Publication (Only for CPRs):** 12/01/2024

**Agency Information**

<b>1. Title catchline:</b>	Environmental Quality, Air Quality	
<b>Building:</b>	Multi Agency State Office Building	
<b>Street address:</b>	195 N 1950 W	
<b>City, state:</b>	Salt Lake City, UT	
<b>Mailing address:</b>	PO BOX 144820	
<b>City, state and zip:</b>	Salt Lake City, UT 84114-4820	
<b>Contact persons:</b>		
<b>Name:</b>	<b>Phone:</b>	<b>Email:</b>
Alan Humpherys	801-536-4142	ahumpherys@utah.gov
Erica Pryor	385-499-3416	epryor1@utah.gov

**Please address questions regarding information on this notice to the persons listed above.**

**General Information**

<b>2. Rule or section catchline:</b>
R307-209. Portable Aggregate Processing Plants.
<b>3. Purpose of the new rule or reason for the change:</b>
Rule R307-209 will allow portable aggregate sources to operate under a temporary relocation notice without first having obtained an Approval Order. A minor change is being proposed after a 30-day public comment period.
<b>4. Summary of the new rule or change:</b>
Based on feedback received during a 30-day public comment period, one minor change is being proposed. A line indicating that sources are required to comply with the applicable provisions of Rule R307-801, Utah Asbestos Rule. Sources were required to comply with the applicable provisions of this rule before the change; however, the rule will specifically mention the rule to provide clarity that sources are not exempt from Rule R307-801, Utah Asbestos Rule.

**Fiscal Information**

<b>5. Provide an estimate and written explanation of the aggregate anticipated cost or savings to:</b>
<b>A) State budget:</b>
The changes to this proposed rule will not add or remove any additional requirements and will not impact the state budget because the changes are clarifying the originally intended meaning.
<b>B) Local governments:</b>
The changes to this proposed rule will not add or remove any additional requirements and will not impact local governments because the changes are clarifying the originally intended meaning.
<b>C) Small businesses</b> ("small business" means a business employing 1-49 persons):
The changes to this proposed rule will not add or remove any additional requirements and will not impact small businesses because the changes are clarifying the originally intended meaning.
<b>D) Non-small businesses</b> ("non-small business" means a business employing 50 or more persons):
The changes to this proposed rule will not add or remove any additional requirements and will not impact non-small businesses because the changes are clarifying the originally intended meaning.

**E) Persons other than small businesses, non-small businesses, state, or local government entities** ("person" means any individual, partnership, corporation, association, governmental entity, or public or private organization of any character other than an **agency**):

The changes to this proposed rule will not add or remove any additional requirements and will not impact persons other than small businesses, non-small businesses, state, or local government entities because the changes are clarifying the originally intended meaning.

**F) Compliance costs for affected persons** (How much will it cost an impacted entity to adhere to this rule or its changes?):

The changes to this proposed rule will not add or remove any additional requirements and will not cause any additional compliance costs for affected persons because the changes are clarifying the originally intended meaning.

**G) Regulatory Impact Summary Table** (This table only includes fiscal impacts that could be measured. If there are inestimable fiscal impacts, they will not be included in this table. Inestimable impacts will be included in narratives above.)

Regulatory Impact Table			
Fiscal Cost	FY2025	FY2026	FY2027
State Government	\$0	\$0	\$0
Local Governments	\$0	\$0	\$0
Small Businesses	\$0	\$0	\$0
Non-Small Businesses	\$0	\$0	\$0
Other Persons	\$0	\$0	\$0
<b>Total Fiscal Cost</b>	<b>\$0</b>	<b>\$0</b>	<b>\$0</b>
Fiscal Benefits	FY2025	FY2026	FY2027
State Government	\$0	\$0	\$0
Local Governments	\$0	\$0	\$0
Small Businesses	\$0	\$0	\$0
Non-Small Businesses	\$0	\$0	\$0
Other Persons	\$0	\$0	\$0
<b>Total Fiscal Benefits</b>	<b>\$0</b>	<b>\$0</b>	<b>\$0</b>
<b>Net Fiscal Benefits</b>	<b>\$0</b>	<b>\$0</b>	<b>\$0</b>

**H) Department head comments on fiscal impact and approval of regulatory impact analysis:**

The Executive Director of the Department of Environmental Quality, Kim D. Shelley, has reviewed and approved this regulatory impact analysis.

**Citation Information**

**6. Provide citations to the statutory authority for the rule. If there is also a federal requirement for the rule, provide a citation to that requirement:**

U.S.C. Title 42 Chapter 85 Subchapter I Part A Section 7410 (a)(1)2(A)		

**Incorporations by Reference Information**

**7. Incorporations by Reference** (if this rule incorporates more than two items by reference, please include additional tables):

**A) This rule adds or updates the following title of materials incorporated by references** (a copy of materials incorporated by reference must be submitted to the Office of Administrative Rules; *if none, leave blank*):

<b>Official Title of Materials Incorporated</b> (from title page)	
<b>Publisher</b>	
<b>Issue Date</b>	
<b>Issue or Version</b>	

**B) This rule adds or updates the following title of materials incorporated by references** (a copy of materials incorporated by reference must be submitted to the Office of Administrative Rules; *if none, leave blank*):

<b>Official Title of Materials Incorporated (from title page)</b>	
<b>Publisher</b>	
<b>Issue Date</b>	
<b>Issue or Version</b>	

**Public Notice Information**

**8. The public may submit written or oral comments to the agency identified in box 1.** (The public may also request a hearing by submitting a written request to the agency. See Section 63G-3-302 and Rule R15-1 for more information.)

**A) Comments will be accepted until:**

**B) A public hearing (optional) will be held:**

<b>Date (mm/dd/yyyy):</b>	<b>Time (hh:mm AM/PM):</b>	<b>Place (physical address or URL):</b>
N/A CPR		

**To the agency:** If more than one hearing will take place, continue to add rows.

**9. This rule change MAY become effective on:**

NOTE: The date above is the date the agency anticipates making the rule or its changes effective. It is NOT the effective date.

**Agency Authorization Information**

**To the agency:** Information requested on this form is required by Sections 63G-3-301, 63G-3-302, 63G-3-303, and 63G-3-402. Incomplete forms will be returned to the agency for completion, possibly delaying publication in the *Utah State Bulletin* and delaying the first possible effective date.

<b>Agency head or designee and title:</b>	Bryce C. Bird, Director, Division of Air Quality	<b>Date:</b>	01/17/2025
---	--	--------------	------------

1 **R307. Environmental Quality, Air Quality.**

2 **R307-209. Portable Aggregate Processing Plants.**

3 **R307-209-1. Purpose.**

4 Rule R307-209 establishes requirements for portable aggregate processing plants including  
5 concrete batch plants, asphalt plants, and nonmetallic mineral processing plants.  
6

7 **R307-209-2. Definitions.**

8 “Asphalt Plant” means any equipment used to produce, process, or store hot-mix, warm-mix, or  
9 cold-mix asphalt and its ingredients. Equipment in this definition includes dryers, mixers, screens,  
10 conveyors, storage bins or silos, storage tanks, and loading stations.

11 “Concrete Batch Plant” means any equipment used to produce, process, or store concrete and its  
12 ingredients. Equipment in this definition includes mixers, screens, conveyors, storage bins or silos, and  
13 loading stations.

14 “Nonmetallic Mineral Processing Plant” means any equipment used to produce, process, or store  
15 nonmetallic minerals. Equipment in this definition includes crushers, grinding mills, screens, conveyors,  
16 storage bins or silos, and loading stations.

17 “Portable Aggregate Processing Plant” means any nonmetallic mineral processing plant, asphalt  
18 plant, or concrete batch plant that temporarily operates for a period of not more than 180 working days or  
19 365 consecutive calendar days at a single source. Engines, boilers, and storage tanks used to support  
20 concrete batch plants, asphalt plants, or nonmetallic mineral processing plants are included in this  
21 definition.  
22

23 **R307-209-3. Applicability.**

24 (1) Rule R307-209 applies to each portable aggregate processing plant including each concrete  
25 batch plant, asphalt plant, and nonmetallic mineral processing plant.

26 (2) Rule R307-209 does not apply to concrete batch plants, asphalt plants, or nonmetallic mineral  
27 processing plants that are subject to an approval order issued under Section R307-401-8.

28 (3) Rule R307-209 does not apply to a concrete batch plant, asphalt plant, or nonmetallic mineral  
29 processing plant that plans to or will operate at a single source longer than 180 operating days or remains  
30 at a source longer than 365 calendar days. These sources shall submit a notice of intent and obtain an  
31 approval order under Rule R307-401 before beginning actual construction unless the source qualifies for  
32 an exemption under Section R307-401-9.  
33

34 **R307-209-4. Notice of Temporary Relocation.**

35 (1) An owner or operator of a portable aggregate processing plant shall submit a Notice of  
36 Temporary Relocation to the director and obtain a Temporary Relocation Approval Letter before  
37 operating a portable source at any location.

38 (2) A Notice of Temporary Relocation shall include the following:

39 (a) the address and driving directions of the proposed location;

40 (b) a list of the equipment to be operated at the proposed location, including the:

41 (i) type of equipment;

42 (ii) rated capacity of the equipment; and

43 (iii) date of manufacture of the equipment;

44 (c) a site diagram showing the general equipment location on site to scale; and

45 (d) the distance to the nearest houses, barns, or commercial operations to scale if the plant  
46 boundary is located within one mile of these buildings;

47 (e) the expected startup and completion dates for operating at the proposed location;

48 (f) the expected hours of operation, including start and stop times;

49 (g) the emission control measures that the owner or operator proposes to adopt for each emission  
50 point at each location, including a fugitive dust control plan specific to the proposed location; and

51 (h) if relocating an asphalt plant, either:

52 (i) the results and the date of the most recent stack test for the asphalt plant; or

53 (ii) the anticipated stack test date and the stack test protocol for an asphalt plant that has not been  
54 stack tested.

1  
2 **R307-209-5. Operations at a Temporary Location.**

3 (1) An owner or operator of a portable aggregate processing plant may not exceed 180 working  
4 days and may not exceed 365 calendar days at a single location.

5 (2) An owner or operator of a portable aggregate processing plant may not operate the portable  
6 aggregate processing plant before 6 a.m. or after 10 p.m. each day at each temporary location.

7 (3) An owner or operator of a portable aggregate processing plant shall operate in accordance  
8 with the terms and conditions of the Temporary Relocation Approval Letter issued by the director for  
9 each location.

10 (4) An owner or operator of a portable aggregate processing plant shall comply with the  
11 applicable requirements of Rule R307-801, Utah Asbestos Rule.

12  
13 **R307-209-6. Recordkeeping & Reporting Requirements.**

14 (1) Following the end of operations at each temporary location, an owner or operator of a  
15 portable aggregate processing plant shall submit the following records to the director at the end of  
16 operation at each temporary location, and shall retain the records for at least two years:

17 (a) the initial relocation date at each location;

18 (b) number of working days at each location;

19 (c) consecutive days at each location;

20 (d) the production for each day of operation at each location;

21 (e) the total production at each location;

22 (f) the time operations started and ended each day at each location; and

23 (g) the last day of operation at each location.

24 (2) An owner or operator of a portable aggregate processing plant shall keep records and submit  
25 emissions inventories according to Rule R307-150.

26  
27 **R307-209-7. Fugitive Dust Requirements.**

28 Unless otherwise specified in Rule R307-209, an owner or operator of a portable aggregate  
29 processing plant shall comply with the following for fugitive dust:

30 (1) the opacity limits and control measures in Section R307-309-5; and

31 (2) the fugitive dust control plan submitted with the Notice of Temporary Relocation for each  
32 respective location.

33  
34 **R307-209-8. Concrete Batch Plant Requirements.**

35 An owner or operator of a concrete batch plant shall comply with the following:

36 (1) ensure opacity does not exceed the limits in Section R307-312-4; and

37 (2) control particulate emissions from each storage silo and each mixer with a fabric filter, a  
38 baghouse, a bin vent, or a dust collector.

39  
40 **R307-209-9. Nonmetallic Mineral Processing Plant Requirements.**

41 An owner or operator of a nonmetallic mineral processing plant shall comply with the following:

42 (1) ensure opacity does not exceed the limits in Section R307-312-4; and

43 (2) use water sprays and water application to control particulate emissions from each crusher,  
44 screen, and conveyor.

45  
46 **R307-209-10. Asphalt Plant Requirements.**

47 (1) An owner or operator of an asphalt plant shall comply with the following:

48 (a) ensure opacity does not exceed 10% opacity and opacity observations shall be conducted in  
49 accordance with 40 CFR 60, Method 9;

50 (b) use natural gas, propane, fuel oil, on-specification used oil as defined in Rule R315-15, or  
51 any combination thereof as fuel;

52 (c) maintain records of fuel use;

53 (d) control particulate emissions from each storage silo with a fabric filter, a baghouse, a bin  
54 vent, or a dust collector;

- 1 (e) control particulate emissions from each asphalt mixer with a baghouse;  
2 (f) maintain the pressure drop of the asphalt plant baghouse between 3.0 and 7.0 inches of water  
3 during operation and additionally the owner or operator shall comply with the following:  
4 (i) install a pressure gauge on each baghouse;  
5 (ii) ensure the pressure gauge measures the pressure drop in 1-inch water column increments or  
6 less;  
7 (iii) calibrate the pressure gauge according to the manufacturer's instructions at least once every  
8 12 months; and  
9 (iv) record the reading of the pressure gauge at least once per operating day.  
10 (2) The owner or operator shall:  
11 (a) ensure filterable PM2.5 emissions do not exceed 0.024 grains per dry standard cubic foot;  
12 (b) conduct an initial stack test on each asphalt plant within 180 days after startup;  
13 (c) conduct a stack test on each asphalt plant within three years after the date of the most recent  
14 stack test;  
15 (d) conduct stack testing according to Rule R307-165; and  
16 (e) determine PM2.5 emissions by 40 CFR 60, Appendix A, Method 5.  
17

18 **R307-209-11. Diesel-Fired Engine Requirements.**

19 An owner or operator of a diesel-fired engine associated with a portable aggregate processing  
20 plant shall comply with the following.

- 21 (1) Maintain opacity at or below 20% opacity. Opacity observations shall be conducted in  
22 accordance with 40 CFR 60, Method 9.  
23 (2) Use Ultra-Low Sulfur Diesel (ULSD) as defined in 40 CFR 1090.305 as fuel.  
24 (3) Maintain records of ULSD use.  
25

26 **KEY: air pollution, permits, approval orders, greenhouse gases**

27 **Date of Last Change: 2025**

28 **Authorizing, and Implemented or Interpreted Law: 19-2-104(3)(b)(iii); 19-2-108**

# ITEM 6



State of Utah

SPENCER J. COX  
*Governor*

DEIDRE HENDERSON  
*Lieutenant Governor*

Department of  
Environmental Quality

Kimberly D. Shelley  
*Executive Director*

DIVISION OF AIR QUALITY  
Bryce C. Bird  
*Director*

DAQ-009-25

**MEMORANDUM**

**TO:** Air Quality Board

**THROUGH:** Bryce C. Bird, Executive Secretary

**THROUGH:** Erica Pryor, Rules Coordinator

**FROM:** Alan Humpherys, Minor New Source Review Section Manager

**DATE:** January 22, 2025

**SUBJECT:** PROPOSE FOR FINAL ADOPTION: Amend R307-401. Permit: New and Modified Sources.

---

In response to the new rule R307-209, Portable Aggregate Processing Plants, an amendment to rule R307-401, Permit: New and Modified Sources, is necessary. A revision to section R307-401-10 will allow these sources to temporarily relocate aggregate equipment without first obtaining an approval order. The amendment to rule R307-401 will not add any new requirements to sources but save sources the time and money from first obtaining a portable approval order. In addition, the new process will reduce DAQ staff time spent on this work.

On November 6, 2024, the Utah Air Quality Board approved a 30-day public comment period for the proposed amendments. This public comment period ran from December 1, 2024, to December 31, 2024. A public hearing was scheduled for December 18, 2024; however, no request was made to hold the hearing, and it was cancelled in accordance with 63G-3-302. No public comments were received on the proposed rule amendment.

Recommendation: Staff recommend the Board approve the amendment to rule R307-401, Permit: New and Modified Sources, for final adoption.

**State of Utah**  
**Administrative Rule Analysis**  
Revised May 2024

**NOTICE OF SUBSTANTIVE CHANGE**

**TYPE OF FILING:** Amendment

**Rule or Section Number:**

**R307-401**

**Filing ID: Office Use Only**

**Date of Previous Publication (Only for CPRs):** [Click or tap to enter a date.](#)

**Agency Information**

<b>1. Title catchline:</b>	Environmental Quality, Air Quality	
<b>Building:</b>	Multi-Agency State Office Building	
<b>Street address:</b>	195 N 1950 W	
<b>City, state:</b>	Salt Lake City	
<b>Mailing address:</b>	PO BOX 144820	
<b>City, state and zip:</b>	Salt Lake City, UT 84114-4820	
<b>Contact persons:</b>		
<b>Name:</b>	<b>Phone:</b>	<b>Email:</b>
Alan Humpherys	801-536-4142	ahumpherys@utah.gov
Erica Pryor	385-499-3416	epryor1@utah.gov

**Please address questions regarding information on this notice to the persons listed above.**

**General Information**

<b>2. Rule or section catchline:</b>
R307-401. Permit: New and Modified Sources.
<b>3. Purpose of the new rule or reason for the change:</b>
The Division of Air Quality (DAQ) will be proposing a new rule R307-209, Portable Aggregate Processing Plants, which will impact Rule R307-401 Permit: New and Modified Sources by necessitating an additional exemption under Subsection R307-401-10(8).
<b>4. Summary of the new rule or change:</b>
This filing adds an additional source listed as a new Subsection, R307-401-10(8) portable aggregate processing plant, to the list of exemptions under Section R307-401-10 Source Category Exemptions. This change is because of the introduction of new Rule R307-209, Portable Aggregate Processing Plants.

**Fiscal Information**

<b>5. Provide an estimate and written explanation of the aggregate anticipated cost or savings to:</b>
<b>A) State budget:</b>
On average, DAQ issues around four portable Approval Orders a year. The average cost of a portable approval order is \$3,075. It is anticipated that the DAQ will not receive around \$12,300 a year in permitting fees by implementing this rule.
<b>B) Local governments:</b>
DAQ is not aware of any local governments that have a portable Approval Order, so it is anticipated that this rule change will not have an impact on local governments.
<b>C) Small businesses</b> ("small business" means a business employing 1-49 persons):
The proposed changes to Rule R307-401 are anticipated to provide a total fiscal savings of \$12,300 per year to all impacted companies, with no negative fiscal impacts anticipated. At this time DAQ is unable to estimate how many of the total companies impacted by this rulemaking are small businesses, however the anticipated savings would apply to all small businesses impacted.
<b>D) Non-small businesses</b> ("non-small business" means a business employing 50 or more persons):

The proposed amendments to Rule R307-401 are anticipated to provide a total fiscal savings of \$12,300 per year to all impacted companies, with no negative fiscal impacts anticipated. At this time DAQ is unable to estimate how many of the total companies impacted by this rulemaking are non-small businesses, however the anticipated savings would apply to all non-small businesses impacted.

**E) Persons other than small businesses, non-small businesses, state, or local government entities** ("person" means any individual, partnership, corporation, association, governmental entity, or public or private organization of any character other than an **agency**):

It is anticipated that amendments to Rule R307-401 would not impact other persons.

**F) Compliance costs for affected persons** (How much will it cost an impacted entity to adhere to this rule or its changes?):

Rule R307-401 will exempt sources from the requirement to obtain Air Quality Approval Orders; therefore, it is anticipated that these amendments will not impose any new compliance costs to affected persons.

**G) Regulatory Impact Summary Table** (This table only includes fiscal impacts that could be measured. If there are inestimable fiscal impacts, they will not be included in this table. Inestimable impacts will be included in narratives above.)

Regulatory Impact Table			
Fiscal Cost	FY2025	FY2026	FY2027
State Government	\$6,150	\$12,300	\$12,300
Local Governments	\$0	\$0	\$0
Small Businesses	\$0	\$0	\$0
Non-Small Businesses	\$0	\$0	\$0
Other Persons	\$0	\$0	\$0
<b>Total Fiscal Cost</b>	<b>\$0</b>	<b>\$12,300</b>	<b>\$12,300</b>
Fiscal Benefits	FY2025	FY2026	FY2027
State Government	\$0	\$0	\$0
Local Governments	\$0	\$0	\$0
Small Businesses	\$0	\$0	\$0
Non-Small Businesses	\$6,150	\$12,300	\$12,300
Other Persons	\$0	\$0	\$0
<b>Total Fiscal Benefits</b>	<b>\$6,150</b>	<b>\$12,300</b>	<b>\$12,300</b>
<b>Net Fiscal Benefits</b>	<b>\$0</b>	<b>\$0</b>	<b>\$0</b>

**H) Department head comments on fiscal impact and approval of regulatory impact analysis:**

The Executive Director of the Department of Environmental Quality, Kim D. Shelley, has reviewed and approved this regulatory impact analysis.

#### Citation Information

**6. Provide citations to the statutory authority for the rule. If there is also a federal requirement for the rule, provide a citation to that requirement:**

Utah Code 19-2-104	U.S.C. Title 42 Chapter 85 Subchapter I Part A Section 7410 (a)(1)2(A)	

#### Incorporations by Reference Information

**7. Incorporations by Reference** (if this rule incorporates more than two items by reference, please include additional tables):

**A) This rule adds or updates the following title of materials incorporated by references** (a copy of materials incorporated by reference must be submitted to the Office of Administrative Rules; *if none, leave blank*):

Official Title of Materials Incorporated (from title page)	
Publisher	
Issue Date	
Issue or Version	

**B) This rule adds or updates the following title of materials incorporated by references** (a copy of materials incorporated by reference must be submitted to the Office of Administrative Rules; *if none, leave blank*):

<b>Official Title of Materials Incorporated (from title page)</b>	
<b>Publisher</b>	
<b>Issue Date</b>	
<b>Issue or Version</b>	

**Public Notice Information**

**8. The public may submit written or oral comments to the agency identified in box 1.** (The public may also request a hearing by submitting a written request to the agency. See Section 63G-3-302 and Rule R15-1 for more information.)

**A) Comments will be accepted until:** 12/31/2024

**B) A public hearing (optional) will be held:**

<b>Date (mm/dd/yyyy):</b>	<b>Time (hh:mm AM/PM):</b>	<b>Place (physical address or URL):</b>

**To the agency:** If more than one hearing will take place, continue to add rows.

**9. This rule change MAY become effective on:** 02/05/2025

NOTE: The date above is the date the agency anticipates making the rule or its changes effective. It is NOT the effective date.

**Agency Authorization Information**

**To the agency:** Information requested on this form is required by Sections 63G-3-301, 63G-3-302, 63G-3-303, and 63G-3-402. Incomplete forms will be returned to the agency for completion, possibly delaying publication in the *Utah State Bulletin* and delaying the first possible effective date.

<b>Agency head or designee and title:</b>	Bryce C. Bird, Director, Division of Air Quality	<b>Date:</b>	10/23/2024
---	--	--------------	------------

1 **R307. Environmental Quality, Air Quality.**

2 **R307-401. Permit: New and Modified Sources.**

3 **R307-401-1. Purpose.**

4 This rule establishes the application and permitting requirements for new installations and  
5 modifications to existing installations throughout the State of Utah. Additional permitting requirements apply  
6 to larger installations or installations located in nonattainment or maintenance areas. These additional  
7 requirements can be found in Rules R307-403, R307-405, R307-406, R307-420, and R307-421. Modeling  
8 requirements in Rule R307-410 may also apply. Each of the permitting rules establishes independent  
9 requirements, and the owner or operator must comply with all of the requirements that apply to the  
10 installation. Exemptions under R307-401 do not affect applicability of the other permitting rules.

11  
12 **R307-401-2. Definitions.**

13 "Actual emissions" (a) means the actual rate of emissions of an air pollutant from an emissions unit,  
14 as determined in accordance with Subsections R307-401-2(b) through R307-401-2(d).

15 (b) In general, actual emissions as of a particular date shall equal the average rate, in tons per year, at  
16 which the unit actually emitted the air pollutant during a consecutive 24-month period which precedes the  
17 particular date and which is representative of normal source operation. The director shall allow the use of a  
18 different time period upon a determination that it is more representative of normal source operation. Actual  
19 emissions shall be calculated using the unit's actual operating hours, production rates, and types of materials  
20 processed, stored, or combusted during the selected time period.

21 (c) The director may presume that source-specific allowable emissions for the unit are equivalent to  
22 the actual emissions of the unit.

23 (d) For any emissions unit that has not begun normal operations on the particular date, actual  
24 emissions shall equal the potential to emit of the unit on that date.

25 "Best available control technology" means an emissions limitation (including a visible emissions  
26 standard) based on the maximum degree of reduction for each air pollutant which would be emitted from any  
27 proposed stationary source or modification which the director, on a case-by-case basis, taking into account  
28 energy, environmental, and economic impacts and other costs, determines is achievable for such source or  
29 modification through application of production processes or available methods, systems, and techniques,  
30 including fuel cleaning or treatment or innovative fuel combustion techniques for control of such pollutant.  
31 In no event shall application of best available control technology result in emissions of any pollutant which  
32 would exceed the emissions allowed by any applicable standard under 40 CFR parts 60 and 61. If the  
33 director determines that technological or economic limitations on the application of measurement  
34 methodology to a particular emissions unit would make the imposition of an emissions standard infeasible, a  
35 design, equipment, work practice, operational standard or combination thereof, may be prescribed instead to  
36 satisfy the requirement for the application of best available control technology. Such standard shall, to the  
37 degree possible, set forth the emissions reduction achievable by implementation of such design, equipment,  
38 work practice or operation, and shall provide for compliance by means which achieve equivalent results.

39 "Air Strippers" are systems designed to pump groundwater to the surface for treatment, usually by  
40 aeration.

41 "Building, structure, facility, or installation" means all of the pollutant-emitting activities which  
42 belong to the same industrial grouping, are located on one or more contiguous or adjacent properties, and are  
43 under the control of the same person (or persons under common control) except the activities of any vessel.  
44 Pollutant-emitting activities shall be considered as part of the same industrial grouping if they belong to the  
45 same Major Group (i.e., which have the same two-digit code) as described in the Standard Industrial  
46 Classification Manual, 1972, as amended by the 1977 Supplement (U.S. Government Printing Office stock  
47 numbers 4101-0066 and 003-005-00176-0, respectively).

48 "Construction" means any physical change or change in the method of operation (including  
49 fabrication, erection, installation, demolition, or modification of an emissions unit) that would result in a  
50 change in emissions.

51 "Emissions unit" means any part of a stationary source that emits or would have the potential to emit  
52 any air pollutant.

53 "Fugitive emissions" means those emissions which could not reasonably pass through a stack,  
54 chimney, vent, or other functionally equivalent opening.

1 "Indirect source" means a building, structure, facility, or installation which attracts or may attract  
2 mobile source activity that results in emissions of a pollutant for which there is a national standard.

3 "Potential to emit" means the maximum capacity of a stationary source to emit an air pollutant under  
4 its physical and operational design. Any physical or operational limitation on the capacity of the source to  
5 emit a pollutant, including air pollution control equipment and restrictions on hours of operation or on the  
6 type or amount of material combusted, stored, or processed, shall be treated as part of its design if the  
7 limitation or the effect it would have on emissions is enforceable. Secondary emissions do not count in  
8 determining the potential to emit of a stationary source.

9 "Secondary emissions" means emissions which occur as a result of the construction or operation of a  
10 major stationary source or major modification, but do not come from the major stationary source or major  
11 modification itself. Secondary emissions include emissions from any offsite support facility which would not  
12 be constructed or increase its emissions except as a result of the construction or operation of the major  
13 stationary source or major modification. Secondary emissions do not include any emissions which come  
14 directly from a mobile source, such as emissions from the tailpipe of a motor vehicle, from a train, or from a  
15 vessel.

16 "Soil Aeration" is an ex-situ treatment process where excavated soil from a remediation project is  
17 spread in a thin layer to encourage biodegradation of soil contamination. Biodegradation may be stimulated  
18 through aeration or the addition of minerals, nutrients, and/or moisture.

19 "Soil Vapor Extraction", or SVE, is a system designed to extract vapor phase contaminants from the  
20 subsurface. SVE systems are often combined with other technologies, such as air sparging or vacuum-  
21 enhanced recovery systems.

22 "Stationary source" means any building, structure, facility, or installation which emits or may emit an  
23 air pollutant.

24 "Vapor Mitigation System", or VMS, is a sub-slab system whose primary purpose is mitigating  
25 vapor intrusion into an occupied, or occupiable, structure and is not intended or designed for the remediation  
26 of contaminated soil or groundwater. This definition includes both active and passive systems. Passive  
27 systems consist of a vapor barrier either below or above the slab of a structure and a venting system  
28 installed under a structure to divert vapor from beneath the structure to the sides or roofline of a structure.  
29 Active systems are similar to passive systems but incorporate a blower or fan to actively extract air from  
30 beneath the structure.

### 31 32 **R307-401-3. Applicability.**

33 (1) Rule R307-401 applies to any person planning to:

34 (a) construct a new installation that will or might reasonably be expected to be a source or an indirect  
35 source of air pollution;

36 (b) make modifications to or relocate an existing installation that will or might reasonably be  
37 expected to increase the amount of or change the character or effect of air pollutants discharged, so that the  
38 installation may be expected to be a source or indirect source of air pollution; or

39 (c) install an air cleaning device or other equipment intended to control emission of air pollutants.

40 (2) Rules R307-403, R307-405 and R307-406 may establish additional permitting requirements for  
41 new or modified sources.

42 (a) Exemptions contained in Rule R307-401 do not affect applicability or other requirements under  
43 Rules R307-403, R307-405 or R307-406.

44 (b) Exemptions contained in Rules R307-403, R307-405 or R307-406 do not affect applicability or  
45 other requirements under Rule R307-401, unless specifically authorized in this rule.

### 46 47 **R307-401-4. General Requirements.**

48 The general requirements in Subsections R307-401-4(1) through R307-401-4(4) apply to all new and  
49 modified installations, including installations that are exempt from the requirement to obtain an approval  
50 order.

51 (1) Any control apparatus installed on an installation shall be adequately and properly maintained.

52 (2) If the director determines that an exempted installation is not meeting an approval order or State  
53 Implementation Plan limitation, is creating an adverse impact to the environment, or would be injurious to  
54 human health or welfare, the director may require the owner or operator to submit a notice of intent and

1 obtain an approval order in accordance with Sections R307-401-5 through R307-401-8. The director will  
2 complete an appropriate analysis and evaluation in consultation with the owner or operator before  
3 determining that an approval order is required.

4 (3) Low Oxides of Nitrogen Burner Technology.

5 (a) Except as provided in Subsection R307-401-4(3)(b), whenever existing fuel combustion burners  
6 are replaced, the owner or operator shall install low oxides of nitrogen burners or equivalent oxides of  
7 nitrogen controls, as determined by the director, unless such equipment is not physically practical or cost  
8 effective. The owner or operator shall submit a demonstration that the equipment is not physically practical or  
9 cost effective to the director for review and approval prior to beginning construction.

10 (b) The provisions of (a) above do not apply to non-commercial, residential buildings.

11 (4) A person shall not operate a source of air pollution that is required to have a permit under Rule  
12 R307-401 unless the person has obtained a permit for the source under the procedures of Rule R307-401.

13  
14 **R307-401-5. Notice of Intent.**

15 (1) Except as provided in Sections R307-401-9 through R307-401-17, any person subject to Rule  
16 R307-401 shall submit a notice of intent to the director and receive an approval order precedent to the  
17 construction, modification, installation, establishment, or relocation of an air pollutant source or indirect  
18 source. The notice of intent shall be in a format specified by the director.

19 (2) The notice of intent shall include the following information:

20 (a) A description of the nature of the processes involved; the nature, procedures for handling and  
21 quantities of raw materials; the type and quantity of fuels employed; and the nature and quantity of finished  
22 product.

23 (b) The expected composition and physical characteristics of effluent stream both before and after  
24 treatment by any control apparatus, including emission rates, volume, temperature, air pollutant types, and  
25 concentration of air pollutants.

26 (c) The size, type, and performance characteristics of any control apparatus.

27 (d) An analysis of best available control technology for the proposed source or modification. When  
28 determining best available control technology for a new or modified source in an ozone nonattainment or  
29 maintenance area that will emit volatile organic compounds or nitrogen oxides, the owner or operator of the  
30 source shall consider EPA Control Technique Guidance (CTG) documents and Alternative Control  
31 Technique documents that are applicable to the source. Best available control technology shall be at least as  
32 stringent as any published CTG that is applicable to the source.

33 (e) The location and elevation of the emission point and other factors relating to dispersion and  
34 diffusion of the air pollutant in relation to nearby structures and window openings, and other information  
35 necessary to appraise the possible effects of the effluent.

36 (f) The location of planned sampling points and the tests of the completed installation to be made by  
37 the owner or operator when necessary to ascertain compliance.

38 (g) The typical operating schedule.

39 (h) A schedule for construction.

40 (i) Any plans, specifications and related information that are in final form at the time of submission  
41 of notice of intent.

42 (j) Any additional information required by:

43 (i) Rule R307-403, Permits: New and Modified Sources in Nonattainment Areas and Maintenance  
44 Areas;

45 (ii) Rule R307-405, Permits: Major Sources in Attainment or Unclassified Areas (PSD);

46 (iii) Rule R307-406, Visibility;

47 (iv) Rule R307-410, Permits: Emissions Impact Analysis;

48 (v) Rule R307-420, Permits: Ozone Offset Requirements in Davis and Salt Lake Counties; or

49 (vi) Rule R307-421, Permits: PM10 Offset Requirements in Salt Lake County and Utah County.

50 (k) Any other information necessary to determine if the proposed construction, modification,  
51 installation, or establishment will be in accord with Title R307.

52 (l) The payment of a new source review fee established under Subsection 19-1-201(6)(i).

53 (3) Notwithstanding the exemptions in Sections R307-401-9 through R307-401-16, any person that  
54 is subject to Rules R307-403, R307-405, or R307-406 shall submit a notice of intent to the director and

1 receive an approval order precedent to the construction, modification, installation, establishment, or  
2 relocation of an air pollutant source or indirect source.

3  
4 **R307-401-6. Review Period.**

5 (1) Completeness Determination. Within 30 days after receipt of a notice of intent, or any additional  
6 information necessary to the review, the director will advise the applicant of any deficiency in the notice of  
7 intent or the information submitted.

8 (2) Within 90 days after the receipt of a complete application including all the information described  
9 in Section R307-401-5, the director will

10 (a) issue an approval order for the proposed construction, installation, modification, relocation, or  
11 establishment pursuant to the requirements of Section R307-401-8, or

12 (b) issue an order prohibiting the proposed construction, installation, modification, relocation or  
13 establishment if it is determined that any part of the proposal will not be in the accord with the requirements  
14 of Title R307.

15 (3) The review period under Subsection R307-401-6(2) may be extended by up to three 30-day  
16 extensions if more time is needed to review the proposal.

17  
18 **R307-401-7. Public Notice.**

19 (1) Issuing the Notice. Prior to issuing an approval or disapproval order of the proposed  
20 construction, installation, modification, relocation or establishment, the director shall:

21 (a) publish a legal notice of the intent to approve or disapprove on the public legal notice website  
22 under Subsection 45-1-101(2);

23 (b) notify the public of the intent to approve or disapprove on the Division's website; and

24 (c) post the draft permit and administrative record for the draft permit, or information on how to  
25 access the administrative record for the draft permit, on the Division's website for the duration of the  
26 public comment period.

27 (2) Opportunity for Review and Comment.

28 (a) At least one location will be provided where the information submitted by the owner or  
29 operator, the director's analysis of the notice of intent proposal, and the proposed approval order  
30 conditions will be available for public inspection.

31 (b) Public Comment.

32 (i) A 30-day public comment period will be established.

33 (ii) A request to extend the length of the comment period, up to 30 days, may be submitted to the  
34 director within 15 days of the date the legal notice in Subsection R307-401-7(1)(a) is published.

35 (iii) Public Hearing. A request for a hearing on the proposed approval or disapproval order may  
36 be submitted to the director within 15 days of the date the legal notice in Subsection R307-401-7(1)(a) is  
37 published.

38 (iv) The hearing will be held in the area of the proposed construction, installation, modification,  
39 relocation or establishment.

40 (v) The public comment and hearing procedure shall not be required when an order is issued to  
41 extend the time required by the director to review plans and specifications.

42 (3) The director will consider comments received during the public comment period and at the  
43 public hearing and, if appropriate, will make changes to the proposal in response to comments before  
44 issuing an approval order or disapproval order.

45  
46 **R307-401-8. Approval Order.**

47 (1) The director will issue an approval order if the following conditions have been met:

48 (a) The degree of pollution control for emissions, to include fugitive emissions and fugitive dust, is  
49 at least best available control technology. When determining best available control technology for a new or  
50 modified source in an ozone nonattainment or maintenance area that will emit volatile organic compounds or  
51 nitrogen oxides, best available control technology shall be at least as stringent as any Control Technique  
52 Guidance document that has been published by EPA that is applicable to the source.

53 (b) The proposed installation will meet the applicable requirements of:

54 (i) Rule R307-403, Permits: New and Modified Sources in Nonattainment Areas and Maintenance

1 Areas;

- 2 (ii) Rule R307-405, Permits: Major Sources in Attainment or Unclassified Areas (PSD);
- 3 (iii) Rule R307-406, Visibility;
- 4 (iv) Rule R307-410, Permits: Emissions Impact Analysis;
- 5 (v) Rule R307-420, Permits: Ozone Offset Requirements in Davis and Salt Lake Counties;
- 6 (vi) Rule R307-210, Standards of Performance for New Stationary Sources;
- 7 (vii) National Primary and Secondary Ambient Air Quality Standards;
- 8 (viii) Rule R307-214, National Emission Standards for Hazardous Air Pollutants;
- 9 (ix) Rule R307-110, General Requirements: State Implementation Plan; and
- 10 (x) all other provisions of Title R307.

11 (2) The approval order will require that all pollution control equipment be adequately and properly  
12 maintained.

13 (3) Receipt of an approval order does not relieve any owner or operator of the responsibility to  
14 comply with the provisions of Title R307 or the State Implementation Plan.

15 (4) To accommodate staged construction of a large source, the director may issue an order  
16 authorizing construction of an initial stage prior to receipt of detailed plans for the entire proposal provided  
17 that, through a review of general plans, engineering reports and other information the proposal is determined  
18 feasible by the director under the intent of Title R307. Subsequent detailed plans will then be processed as  
19 prescribed in this paragraph. For staged construction projects the previous determination under Subsections  
20 R307-401-8(1) and (2) will be reviewed and modified as appropriate at the earliest reasonable time prior to  
21 commencement of construction of each independent phase of the proposed source or modification.

22 (5) If the director determines that a proposed stationary source, modification or relocation does not  
23 meet the conditions established in (1) above, the director will not issue an approval order.

#### 24 **R307-401-9. Small Source Exemption.**

25 (1) A small stationary source is exempt from the requirement to obtain an approval order in Sections  
26 R307-401-5 through R307-401-8 if the following conditions are met.

27 (a) its actual emissions are less than 5 tons per year per air pollutant of any of the following air  
28 pollutants: sulfur dioxide, carbon monoxide, nitrogen oxides, PM<sub>10</sub>, ozone, or volatile organic compounds;

29 (b) its actual emissions are less than 500 pounds per year of any hazardous air pollutant and less than  
30 2000 pounds per year of any combination of hazardous air pollutants;

31 (c) its actual emissions are less than 500 pounds per year of any air pollutant not listed in (a) or (b)  
32 above and less than 2000 pounds per year of any combination of air pollutants not listed in (a) or (b) above.

33 (d) Air pollutants that are drawn from the environment through equipment in intake air and then are  
34 released back to the environment without chemical change, as well as carbon dioxide, nitrogen, oxygen,  
35 argon, neon, helium, krypton, xenon should not be included in emission calculations when determining  
36 applicability under (a) through (c) above.

37 (2) The owner or operator of a source that is exempted from the requirement to obtain an approval  
38 order under (1) above shall no longer be exempt if actual emissions in any subsequent year exceed the  
39 emission thresholds in (1) above. The owner or operator shall submit a notice of intent under Section R307-  
40 401-5 no later than 180 days after the end of the calendar year in which the source exceeded the emission  
41 threshold.  
42

43 (3) Small Source Exemption - Registration. The director will maintain a registry of sources that are  
44 claiming an exemption under Section R307-401-9. The owner or operator of a stationary source that is  
45 claiming an exemption under Section R307-401-9 may submit a written registration notice to the director.  
46 The notice shall include the following minimum information:

47 (a) identifying information, including company name and address, location of source, telephone  
48 number, and name of plant site manager or point of contact;

49 (b) a description of the nature of the processes involved, equipment, anticipated quantities of  
50 materials used, the type and quantity of fuel employed and nature and quantity of the finished product;

51 (c) identification of expected emissions;

52 (d) estimated annual emission rates;

53 (e) any control apparatus used; and

54 (f) typical operating schedule.

1 (4) An exemption under Section R307-401-9 does not affect the requirements of Section R307-401-  
2 17, Temporary Relocation.

3 (5) A stationary source that is not required to obtain a permit under Rule R307-405 for greenhouse  
4 gases, as defined in Subsection R307-405-3(9)(a), is not required to obtain an approval order for greenhouse  
5 gases under Rule R307-401. This exemption does not affect the requirement to obtain an approval order for  
6 any other air pollutant emitted by the stationary source.

7  
8 **R307-401-10. Source Category Exemptions.**

9 The source categories described in Section R307-401-10 are exempt from the requirement to obtain  
10 an approval order found in Sections R307-401-5 through R307-401-8. The general provisions in Section  
11 R307-401-4 shall apply to these sources.

12 (1) Fuel-burning equipment in which combustion takes place at no greater pressure than one inch of  
13 mercury above ambient pressure with a rated capacity of less than five million BTU per hour using no other  
14 fuel than natural gas or LPG or other mixed gas that meets the standards of gas distributed by a utility in  
15 accordance with the rules of the Public Service Commission of the State of Utah, unless there are emissions  
16 other than combustion products.

17 (2) Comfort heating equipment such as boilers, water heaters, air heaters and steam generators with  
18 a rated capacity of less than one million BTU per hour if fueled only by fuel oil numbers 1 - 6,

19 (3) Emergency heating equipment, using coal or wood for fuel, with a rated capacity less than  
20 50,000 BTU per hour.

21 (4) Exhaust systems for controlling steam and heat that do not contain combustion products.

22 (5) A well site as defined in 40 CFR 60.5430a, including centralized tank batteries, that is not a  
23 major source as defined in Section R307-101-2, and is registered with the Division as required by Rule R307-  
24 505.

25 (6) A gasoline dispensing facility as defined in 40 CFR 63.11132 that is not a major source as  
26 defined in Section R307-101-2. These sources shall comply with the applicable requirements of Rule R307-  
27 328 and 40 CFR 63 Subpart CCCC: National Emission Standards for Hazardous Air Pollutants for  
28 Source Category: Gasoline Dispensing Facilities.

29 (7) A Vapor Mitigation System as defined in R307-401-2.

30 (8) A Portable Aggregate Processing Plant as defined in Subsection R307-209-2.

31  
32  
33 **R307-401-11. Replacement-in-Kind Equipment.**

34 (1) Applicability. Existing process equipment or pollution control equipment that is covered by an  
35 existing approval order or State Implementation Plan requirement may be replaced using the procedures in  
36 (2) below if:

37 (a) the potential to emit of the process equipment is the same or lower;

38 (b) the number of emission points or emitting units is the same or lower;

39 (c) no additional types of air pollutants are emitted as a result of the replacement;

40 (d) the process equipment or pollution control equipment is identical to or functionally equivalent to  
41 the replaced equipment;

42 (e) the replacement does not change the basic design parameters of the process unit or pollution  
43 control equipment;

44 (f) the replaced process equipment or pollution control equipment is permanently removed from the  
45 stationary source, otherwise permanently disabled, or permanently barred from operation;

46 (g) the replacement process equipment or pollution control equipment does not trigger New Source  
47 Performance Standards or National Emissions Standards for Hazardous Air Pollutants under 42 U.S.C. 7411  
48 or 7412; and

49 (h) the replacement of the control apparatus or process equipment does not violate any other  
50 provision of Title R307.

51 (2) Replacement-in-Kind Procedures.

52 (a) In lieu of filing a notice of intent under Section R307-401-5, the owner or operator of a stationary  
53 source shall submit a written notification to the director before replacing the equipment. The notification shall  
54 contain a description of the replacement-in-kind equipment, including the control capability of any control

1 apparatus and a demonstration that the conditions of (1) above are met.

2 (b) If the replacement-in-kind meets the conditions of (1) above, the director will update the source's  
3 approval order and notify the owner or operator. Public review under Section R307-401-7 is not required for  
4 the update to the approval order.

5 (3) If the replaced process equipment or pollution control equipment is brought back into operation,  
6 it shall constitute a new emissions unit.

7  
8 **R307-401-12. Reduction in Air Pollutants.**

9 (1) Applicability. The owner or operator of a stationary source of air pollutants that reduces or  
10 eliminates air pollutants is exempt from the requirement to submit a notice of intent and obtain an approval  
11 order prior to construction if:

12 (a) the project does not increase the potential to emit of any air pollutant or cause emissions of any  
13 new air pollutant, and

14 (b) the director is notified of the change and the reduction of air pollutants is made enforceable  
15 through an approval order in accordance with (2) below.

16 (2) Notification. The owner or operator shall submit a written description of the project to the  
17 director no later than 60 days after the changes are made. The director will update the source's approval order  
18 or issue a new approval order to include the project and to make the emission reductions enforceable. Public  
19 review under Section R307-401-7 is not required for the update to the approval order.

20  
21 **R307-401-13. Plantwide Applicability Limits.**

22 A plantwide applicability limit under Section R307-405-21 does not exempt a stationary source from  
23 the requirements of R307-401.

24  
25 **R307-401-14. Used Oil Fuel Burned for Energy Recovery.**

26 (1) Definitions.

27 "Used Oil" is defined as any oil that has been refined from crude oil, used, and, as a result of such  
28 use contaminated by physical or chemical impurities.

29 (2) An emission unit that burns used oil, as defined in Section R315-15-1, for energy recovery is  
30 exempt from the requirement to obtain an approval order in Sections R307-401-5 through R307-401-8 if  
31 the owner or operator complies with Section R315-15-6 and the heat input design of the emission unit is  
32 not more than 0.5 MMBtu/hr.

33  
34 **R307-401-15. Air Strippers and Soil Vapor Extraction Systems.**

35 R307-401-15 applies to remediation systems with the potential to generate air emissions, such as air  
36 strippers and soil vapor extraction (SVE) as defined in R307-401-2.

37 (1) The owner or operator of an air stripper or SVE remediation system is exempt from the notice of  
38 intent and approval order requirements of Sections R307-401-5 through R307-401-8 if the following  
39 conditions are met:

40 (a) actual emissions of volatile organic compounds from a given project are less than 5 tons per year;  
41 and

42 (b) emission rates of hazardous air pollutants are below their respective threshold values contained  
43 in R307-410-5(1)(c)(i)(C).

44 (2) The owner or operator shall submit documentation to the director that demonstrates the project  
45 meets the exemption criteria in R307-401-15(1). Required documentation includes, but is not limited to:

46 (a) project summary, including location, system description, operational schedule, and schedule for  
47 construction;

48 (b) emission calculations and any laboratory sampling data used in calculations; and

49 (c) plans and specifications for the system and equipment.

50 (3) After beginning the soil remediation project, the owner or operator shall conduct testing to  
51 demonstrate compliance with the exemption levels in R307-401-15(1)(1) and (b). Monitoring and reporting  
52 shall be conducted as follows:

53 (a) Emissions for air strippers shall be based on the following:

54 (i) influent and effluent water samples analyzed for volatile organic compounds and hazardous air

1 pollutants using the most recent version of USEPA Test Method 8260, Method 8021, or other EPA approved  
2 testing methods acceptable to the director; and

3 (ii) design water flow rate of the system or the water flow rates measured during the sample period.

4 (b) Emissions for SVE systems shall be based on the following:

5 (i) Air samples collected from a sample port in the exhaust stack of the SVE system and analyzed  
6 for volatile organic compounds and hazardous air pollutants using USEPA test method TO-15, or other EPA  
7 approved testing methods acceptable to the director.

8 (ii) Design air flow rate of the system or the air flow rates measured at the outlet of the SVE system  
9 during the sample period. Flow rates should be measured and reported at actual conditions.

10 (c) Within one month of sampling, the owner or operator shall submit to the director the sample  
11 results, estimated emissions of volatile organic compounds, and estimated emission rates of hazardous air  
12 pollutants.

13 (d) Samples shall be collected at the following frequencies or more frequently as determined  
14 necessary by the director:

15 (i) no less than twenty-eight days and no more than thirty-one days (i.e., monthly) after startup for  
16 the first quarter;

17 (ii) quarterly for the remainder of the first year; and

18 (iii) semi-annually thereafter for the life of the project or as allowed in R307-401-15(3)(f).

19 (e) If an SVE or air stripper system is restarted after rehabilitation or an extended period of  
20 shutdown, the owner or operator shall recommence the sampling schedule in R307-415(3)(d), unless  
21 otherwise approved by the director.

22 (f) The owner or operator may request to discontinue sampling after three years of operation. To  
23 discontinue sampling, the owner or operator must submit to the director a request to discontinue monitoring.

24 (i) The request must include documentation demonstrating emissions have remained below the  
25 exemption levels in R307-401-15(1)(a) and (b) since startup of the system.

26 (ii) The request is subject to approval from the director upon consultation with other regulatory  
27 agencies involved in the project, such as Division of Environmental Response and Remediation or Division  
28 of Waste Management and Radiation Control.

29 (4) The following control devices do not require a notice of intent or approval order when used in  
30 relation to an air stripper or soil vapor extraction system that is exempted under Section R307-401-15:

31 (a) thermodestruction unit with a rated input capacity of less than five million BTU per hour using  
32 no other auxiliary fuel than natural gas or LPG, or

33 (b) carbon adsorption unit.

### 34 35 **R307-401-16. Soil Aeration Projects.**

36 R307-401-16 applies to soil aeration projects used to conduct soil remediation.

37 (1) The owner or operator of a soil aeration project is not subject to the notice of intent and approval  
38 order requirements of Sections R307-401-5 through R307-401-8, if the following conditions are met:

39 (a) emissions of volatile organic compounds from a given soil aeration project are less than 5 tons  
40 per year; and

41 (b) emission rates of hazardous air pollutants are below their respective threshold values contained  
42 in R307-410-(1)(c)(i)(C).

43 (2) The owner or operator shall submit documentation to the director demonstrating the project  
44 meets the exemption criteria in R307-401-16(1). The owner or operator shall receive approval from the  
45 director for the exemption prior to beginning the remediation project. Required documentation includes, but  
46 is not limited to:

47 (a) calculated emissions of volatile organic compounds and estimated emission rates of hazardous  
48 air pollutants from all soils to be treated from the soil aeration project.

49 (b) Emission calculations shall be based on soil samples of the soils to be remediated. Samples shall  
50 be analyzed for volatile organic compounds and hazardous air pollutants using the most recent version of  
51 USEPA Test Method 8260, Method 8021, or other EPA approved testing methods acceptable to the director.  
52 Emission calculations should be based on the methodology in EPA guidance "Air Emissions from the  
53 Treatment of Soils Contaminated with Petroleum Fuels and Other Substances" (EPA-600/R-92-124) or other  
54 methodology acceptable to the director.

1 (c) Location where soil aeration will occur and where the remediated material originated.  
2 (3) The owner or operator is exempt from the reporting requirements in R307-401-16(2) if  
3 excavated soils are disposed of at a disposal or treatment facility, such as a landfill, solid waste management  
4 facility, or a landfarm facility, that is owned or operated by a third party and operates under an existing  
5 approval order.  
6

7 **R307-401-17. Temporary Relocation.**

8 The owner or operator of a stationary source previously approved under Rule R307-401 may  
9 temporarily relocate and operate the stationary source at any site for up to 180 working days in any calendar  
10 year not to exceed 365 consecutive days, starting from the initial relocation date. The director will evaluate  
11 the expected emissions impact at the site and compliance with applicable Title R307 rules as the basis for  
12 determining if approval for temporary relocation may be granted. Records of the working days at each site,  
13 consecutive days at each site, and actual production rate shall be submitted to the director at the end of each  
14 180 calendar days. These records shall also be kept on site by the owner or operator for the entire project, and  
15 be made available for review to the director as requested. Section R307-401-7, Public Notice, does not apply  
16 to temporary relocations under Section R307-401-17.  
17

18 **R307-401-18. Eighteen Month Review.**

19 Approval orders issued by the director in accordance with the provisions of Rule R307-401 will be  
20 reviewed eighteen months after the date of issuance to determine the status of construction, installation,  
21 modification, relocation or establishment. If a continuous program of construction, installation, modification,  
22 relocation or establishment is not proceeding, the director may revoke the approval order.  
23

24 **R307-401-19. General Approval Order.**

25 (1) The director may issue a general approval order that would establish conditions for similar  
26 new or modified sources of the same type or for specific types of equipment. The general approval order  
27 may apply throughout the state or in a specific area.

28 (a) A major source or major modification as defined in Rules R307-403, R307-405, or R307-420  
29 for each respective area is not eligible for coverage under a general approval order.

30 (b) A source that is subject to the requirements of Section R307-403-5 is not eligible for  
31 coverage under a general approval order.

32 (c) A source that is subject to the requirements of Section R307-410-4 is not eligible for  
33 coverage under a general approval order unless a demonstration that meets the requirements of Section  
34 R307-410-4 was conducted.

35 (d) A source that is subject to the requirements of Subsection R307-410-5(1)(c)(ii) is not eligible  
36 for coverage under a general approval order unless a demonstration that meets the requirements of  
37 Subsection R307-410-5(1)(c)(ii) was conducted.

38 (e) A source that is subject to the requirements of Subsection R307-410-5(1)(c)(iii) is not eligible  
39 for coverage under a general approval order.

40 (2) A general approval order shall meet applicable requirements of Section R307-401-8.

41 (3) The public notice requirements in Section R307-401-7 shall apply to a general approval  
42 order.

43 (4) Application.

44 (a) After a general approval order has been issued, the owner or operator of a proposed new or  
45 modified source may apply to be covered under the conditions of the general approval order.

46 (b) The owner or operator shall submit the application on forms provided by the director in lieu  
47 of the notice of intent requirements in Section R307-401-5 for equipment covered by the general approval  
48 order.

49 (c) The owner or operator may request that an existing, individual approval order for the source  
50 be revoked, and that it be covered by the general approval order.

51 (d) The owner or operator that has applied to be covered by a general approval order shall not  
52 initiate construction, modification, or relocation until the application has been approved by the director.

53 (5) Approval.

54 (a) The director will review the application and approve or deny the request based on criteria

1 specified in the general approval order for that type of source. If approved, the director will issue an  
2 authorization to the applicant to operate under the general approval order.

3 (b) The public notice requirements in Section R307-401-7 do not apply to the approval of an  
4 application to be covered under the general approval order.

5 (c) The director will maintain a record of stationary sources that are covered by a specific general  
6 approval order and this record will be available for public review.

7 (6) Exclusions and Revocation.

8 (a) The director may require any source that has applied for or is authorized by a general  
9 approval order to submit a notice of intent and obtain an individual approval order under Section R307-  
10 401-8. Cases where the director will require an individual approval order include the following:

11 (i) the director determines that the source does not meet the criteria specified in the general  
12 approval order;

13 (ii) the director determines that the application for the general approval order did not contain all  
14 necessary information to evaluate applicability under the general approval order;

15 (iii) modifications were made to the source that were not authorized by the general approval  
16 order or an individual approval order;

17 (iv) the director determines the source may cause a violation of a national ambient air quality  
18 standard;

19 (v) the director determines that an approval order is required based on the compliance history and  
20 current compliance status of the source or applicant; or

21 (vi) the director determines that an approval order is required for any other reason.

22 (b)(i) Any source authorized by a general approval order may request to be excluded from the  
23 coverage of the general approval order by submitting a notice of intent under Section R307-401-5 and  
24 receiving an individual approval order under Section R307-401-8.

25 (ii) When the director issues an individual approval order to a source subject to a general  
26 approval order, the applicability of the general approval order to the individual source is revoked on the  
27 effective date of the individual approval order.

28 (7) Modification of General Approval Order. The director may modify, replace, or discontinue  
29 the general approval order.

30 (a) Administrative corrections may be made to the existing version of the general approval order.  
31 These corrections are to correct typographical errors or similar minor administrative changes.

32 (b) All other modifications or the discontinuation of a general approval order shall not apply to  
33 any source authorized under previous versions of the general approval order unless the owner or operator  
34 submits an application to be covered under the new version of the general approval order. Modifications  
35 under Subsection R307-401-19(7)(b) shall meet the public notice requirements in Subsection R307-401-  
36 19(3).

37 (c) A general approval order shall be reviewed at least every three years. The review of the  
38 general approval order shall follow the public notice requirements of Subsection R307-401-19(3).

39 (8) Modifications at a source covered by a general approval order. A source may make  
40 modifications only as authorized by the approved general approval order. Modifications outside the scope  
41 authorized by the approved general approval order shall require a new application for either an individual  
42 approval order under Section R307-401-8 or a general approval order under Section R307-401-19.

43  
44 **KEY: air pollution, permits, approval orders, greenhouse gases**

45 **Date of Last Change: September 26, 2022**

46 **Notice of Continuation: May 4, 2022**

47 **Authorizing, and Implemented or Interpreted Law: 19-2-104(3)(b)(iii); 19-2-108**

# ITEM 7



State of Utah

SPENCER J. COX  
Governor

DEIDRE HENDERSON  
Lieutenant Governor

Department of  
Environmental Quality

Kimberly D. Shelley  
Executive Director

DIVISION OF AIR QUALITY  
Bryce C. Bird  
Director

DAQ-010-25

**MEMORANDUM**

**TO:** Air Quality Board

**THROUGH:** Bryce C. Bird, Executive Secretary

**THROUGH:** Erica Pryor, Rules Coordinator

**FROM:** Greg Mortensen, Inventory Section Manager

**DATE:** January 23, 2025

**SUBJECT:** PROPOSE FOR PUBLIC COMMENT: Amend R307-150. Emission Inventories.

---

During a review prompted by a board member question about rule R307-150 in 2020, Division of Air Quality (DAQ) staff determined that the point source hazardous air pollutants (HAPs) exemption threshold calculations in section R307-150-7 could not be replicated. Historical documentation of the calculation was also unavailable despite numerous records searches and interviews with current and former DAQ employees.

Emissions inventory staff began to seek alternative means to calculate HAPs reporting exemptions and working with the State and Local Emissions Inventory System (SLEIS) vendor to evaluate the ability of the program to automatically calculate HAPs based on already required material throughputs and established emission factors. The SLEIS vendor subsequently provided a program enhancement which automatically populates HAPs. The enhancement was applied during the 2023-point source emissions inventory collection and proved successful.

As part of staff research activities, other states were contacted regarding their point HAPs collection rules. Oklahoma and West Virginia have no minimum reporting threshold (note: both states use SLEIS), Louisiana and Wyoming have a ten-pound reporting threshold and South Carolina has a 200 pound threshold. It was also reported that Colorado, Illinois, Iowa, Kentucky, North Carolina, and Wisconsin also have point source HAPs reporting requirements, but no details were provided.

Additionally, it was noted that states that do have a reporting threshold expect that regulated facilities calculate HAPs emissions estimates to determine whether they exceed the threshold and must report or not. Therefore, it is unlikely that establishing a new reporting threshold calculation would reduce the workload for a source. Furthermore, having an expected HAPs list auto-populate in SLEIS reduces the uncertainty for which HAPs sources may need to report for a given process and should save manual calculation time. This should be particularly helpful for smaller point sources who, at times, rely on administrative staff to complete emissions inventories.

Ultimately, striking the HAPs reporting thresholds in section R307-150-7 removes a confusing and intricate calculation sources have struggled with and one which DAQ staff were unable to replicate. More importantly, this proposed change allows sources and DAQ to leverage SLEIS's capability and will align the rule with what sources are already reporting in SLEIS.

The aforementioned rule review also revealed that the current section R307-150-3 language implied that sulfur dioxide (SO<sub>2</sub>) requirements would lapse in 2018. However, that is not the case and SO<sub>2</sub> reporting is still necessary to comply with U.S. Environmental Protection Agency regional haze requirements. Therefore, it is proposed that section R307-150-3 be modified to remove this inaccurate language.

This rule R307-150 review also coincided with the ongoing development of the Northern Wasatch Front Serious Ozone State Implementation Plan. As emissions inventories were passed on to technical analysis staff for modeling, it was noted that the majority of point sources (230 of 421 sources) reported mobile emissions, but other facilities did not. Inventory staff noted that the inconsistency was due to a combination of some sources having a specific reporting requirement in their permits and many others voluntarily reported these emissions as there was no explicit requirement in rule R307-150.

A meeting with various DAQ sections (including technical analysis, policy, emissions inventory, and compliance) was subsequently held to discuss the issue. Technical analysis and policy staff noted that having a consistent and comprehensive emissions inventory on point sources would allow for more accurate emissions spatial allocation, reduced uncertainty, enhanced model performance, and more accurate policy evaluation, if/when needed. Emissions inventory staff noted that most sources are already submitting these emissions and SLEIS is capable of automatically calculating the emissions based on fuel use or operation hours once a source populates the mobile process in SLEIS. Staff do not anticipate a large workload increase for reporting these emissions as many sources already track fuel use and operational hours of equipment. Workload would be further limited as emissions reporting would be restricted to equipment that does not leave the facility's property in a given year.

Staff has consulted with Attorney General representatives related to appropriate rule language changes to incorporate mobile emission reporting and limiting the reporting to mobile sources that do not leave the facility's property. The proposed definition and language have been added to sections R307-150-2, R307-150-5, and R307-150-6.

Finally, additional changes are proposed to bring rule R307-150 into compliance with Executive Order 2021-12.

Recommendation: Staff recommend the Board approve the amendments to rule R307-150, Emission Inventories, for a 30-day public comment period.

**State of Utah**  
**Administrative Rule Analysis**  
Revised May 2024

**NOTICE OF SUBSTANTIVE CHANGE**

**TYPE OF FILING:** Amendment

**Rule or Section Number:**

**R307-150**

**Filing ID: Office Use Only**

**Date of Previous Publication (Only for CPRs):**

Click or tap to enter a date.

**Agency Information**

<b>1. Title catchline:</b>	Environmental Quality, Air Quality	
<b>Building:</b>	Multi-Agency State Office Building	
<b>Street address:</b>	195 N 1950 W	
<b>City, state:</b>	Salt Lake City	
<b>Mailing address:</b>	PO Box 144820	
<b>City, state and zip:</b>	Salt Lake City, UT 84114-4820	
<b>Contact persons:</b>		
<b>Name:</b>	<b>Phone:</b>	<b>Email:</b>
Greg Mortensen	385-226-6171	gmortensen@utah.gov
Erica Pryor	385-499-3416	epryor1@utah.gov

**Please address questions regarding information on this notice to the persons listed above.**

**General Information**

**2. Rule or section catchline:**

R307-150. Emission Inventories.

**3. Purpose of the new rule or reason for the change:**

Rule R307-150 is being updated to reflect what our State and Local Emissions Inventory System (SLEIS) database is capable of. Ultimately, the Division of Air Quality (DAQ) needs to catch the rule up on Hazardous Air Pollutants (HAPs) to reflect what sources are already reporting and what SLEIS is also already able to do. Additionally, DAQ is removing the HAPs exemption limits as staff were unable to replicate the calculation methodology employed in the existing rule. SLEIS is now able to automatically populate any HAPs emission factors with standard, well defined methodology, therefore negating the need for exemption limits. This is a much-simplified means for most facilities to report their HAPs emissions. DAQ staff believe this will also provide more accurate and consistent HAPs data while also streamlining HAPs reporting with criteria pollutants. DAQ is also adding the explicit authority to collect mobile emissions from point sources. Over half of the facilities reporting in SLEIS were already including emissions. This change will allow staff to level the playing field and mandate all facilities to report these emissions. This will result in a more comprehensive point source inventory which can be leveraged for modeling and policy purposes. Staff is also taking the opportunity to update the sulfur dioxide (SO<sub>2</sub>) reporting requirements by removing a conflicting statement indicating an erroneous end date for SO<sub>2</sub> reporting. Additionally, other revisions have been made to bring the rule into compliance with EO 2021-12.

**4. Summary of the new rule or change:**

The amendments to Rule R307-150 do the following:

- Remove HAPs threshold calculation and HAPs reporting exemptions
- Update SO<sub>2</sub> reporting language
  - Remove the outdated timeline for SO<sub>2</sub> reporting period.
- Require mobile emissions reporting by point sources
  - Include the definition of mobile emissions (by modifying reference to 40 CFR 51 to include “which never leave the property”).
  - Add mobile emissions reporting requirement to Sections R307-150-5 and R307-150-6
- Rule language changes to bring the rule into compliance with EO 2021-12

**Fiscal Information**

**5. Provide an estimate and written explanation of the aggregate anticipated cost or savings to:**

**A) State budget:**

There are no anticipated costs or savings to the state budget associated with the amendments to Rule R307-150. No additional costs are expected as the automated HAPs enhancement is already included in the current SLEIS maintenance agreement and mobile emissions are already reportable, and reported by many facilities, in SLEIS. All other changes are administrative language changes for portions of the rule already in effect.

**B) Local governments:**

If not already reporting, there is a possible workload increase to track mobile source use on a facility. However, there are no or negligible costs anticipated for HAPs reporting due to automated processes for local governments associated with the amendments to Rule R307-150.

**C) Small businesses ("small business" means a business employing 1-49 persons):**

If not already reporting, there is a possible workload increase to track mobile source use on a facility. However, there are no or negligible costs anticipated for HAPs reporting due to automated processes for small businesses associated with the amendments to Rule R307-150.

**D) Non-small businesses ("non-small business" means a business employing 50 or more persons):**

If not already reporting, there is a possible workload increase to track mobile source use on a facility. However, there are no or negligible costs anticipated for HAPs reporting due to automated processes for non-small businesses associated with the amendments to Rule R307-150.

**E) Persons other than small businesses, non-small businesses, state, or local government entities ("person" means any individual, partnership, corporation, association, governmental entity, or public or private organization of any character other than an *agency*):**

If not already reporting, there is a possible workload increase to track mobile source use on a facility. However, there are no or negligible costs anticipated for HAPs reporting due to automated processes for non-small businesses associated with the amendments to Rule R307-150.

**F) Compliance costs for affected persons (How much will it cost an impacted entity to adhere to this rule or its changes?):**

If not already reporting, there is a possible workload increase to track mobile source use on a facility. However, given that the majority of facilities already report these emissions, there are a limited number of facilities that do not report and these all vary in operational size and the possible mobile equipment operating on each facility is unknown at this time. Therefore, predicting labor cost (current hourly pay rates are unknown) and possible time needed to determine equipment types to load into the inventory database is unknown due to the potential variability of each operation's mobile quantity and types.

Conversely, workloads costs should be significantly reduced as SLEIS provides the means to input activity data (e.g. fuel use or operating hours, both of which are typically tracked by sources as part of their normal business practices) to calculate emissions. Thus, once the source adds the equipment types and number thereof to SLEIS, they only need to input activity data going forward as SLEIS will carry their equipment type and number from year-to-year.

Removing the HAPs reporting thresholds should have negligible workload increase as SLEIS will automatically calculate HAPs based on the already required activity data for their annual emission inventory reports. Additionally, there is a strong potential that this will reduce workload for sources as they are already expected to determine if their HAP emissions are above or below the threshold in the current rule which involves a complex calculation for each pollutant. For smaller sources, it is not uncommon that administrative staff are tasked with submitting the inventory and are confused by these thresholds. This not only expends their time and agency time supporting them but also exposes sources to potential compliance costs if they fail to report a HAP as they guessed or erroneously calculated that they were below the threshold. SLEIS's HAPs auto-calculation capability alleviates this burden and allows sources to simply populate their processes with already-required activity data.

**G) Regulatory Impact Summary Table (This table only includes fiscal impacts that could be measured. If there are inestimable fiscal impacts, they will not be included in this table. Inestimable impacts will be included in narratives above.)**

**Regulatory Impact Table**

Fiscal Cost	FY2025	FY2026	FY2027
State Government	\$0	\$0	\$0
Local Governments	\$0	\$0	\$0
Small Businesses	\$0	\$0	\$0
Non-Small Businesses	\$0	\$0	\$0
Other Persons	\$0	\$0	\$0
<b>Total Fiscal Cost</b>	<b>\$0</b>	<b>\$0</b>	<b>\$0</b>

Fiscal Benefits	FY2025	FY2026	FY2027
State Government	\$0	\$0	\$0
Local Governments	\$0	\$0	\$0
Small Businesses	\$0	\$0	\$0
Non-Small Businesses	\$0	\$0	\$0
Other Persons	\$0	\$0	\$0
<b>Total Fiscal Benefits</b>	<b>\$0</b>	<b>\$0</b>	<b>\$0</b>
<b>Net Fiscal Benefits</b>	<b>\$0</b>	<b>\$0</b>	<b>\$0</b>

**H) Department head comments on fiscal impact and approval of regulatory impact analysis:**  
The Executive Director of the Department of Environmental Quality, Kim D. Shelley, has reviewed and approved this regulatory impact analysis.

**Citation Information**

**6. Provide citations to the statutory authority for the rule. If there is also a federal requirement for the rule, provide a citation to that requirement:**

Section 19-6a-1642		
--------------------	--	--

**Incorporations by Reference Information**

**7. Incorporations by Reference** (if this rule incorporates more than two items by reference, please include additional tables):

**A) This rule adds or updates the following title of materials incorporated by references** (a copy of materials incorporated by reference must be submitted to the Office of Administrative Rules; *if none, leave blank*):

<b>Official Title of Materials Incorporated (from title page)</b>	
<b>Publisher</b>	
<b>Issue Date</b>	
<b>Issue or Version</b>	

**B) This rule adds or updates the following title of materials incorporated by references** (a copy of materials incorporated by reference must be submitted to the Office of Administrative Rules; *if none, leave blank*):

<b>Official Title of Materials Incorporated (from title page)</b>	
<b>Publisher</b>	
<b>Issue Date</b>	
<b>Issue or Version</b>	

**Public Notice Information**

**8. The public may submit written or oral comments to the agency identified in box 1.** (The public may also request a hearing by submitting a written request to the agency. See Section 63G-3-302 and Rule R15-1 for more information.)

**A) Comments will be accepted until:** 03/31/2025

**B) A public hearing (optional) will be held:**

<b>Date (mm/dd/yyyy):</b>	<b>Time (hh:mm AM/PM):</b>	<b>Place (physical address or URL):</b>
TBD	TBD	TBD

**To the agency:** If more than one hearing will take place, continue to add rows.

**9. This rule change MAY become effective on:** 04/07/2025

NOTE: The date above is the date the agency anticipates making the rule or its changes effective. It is NOT the effective date.

**Agency Authorization Information**

**To the agency:** Information requested on this form is required by Sections 63G-3-301, 63G-3-302, 63G-3-303, and 63G-3-402. Incomplete forms will be returned to the agency for completion, possibly delaying publication in the *Utah State Bulletin* and delaying the first possible effective date.

<b>Agency head or designee and title:</b>	Bryce C. Bird, Director, Division of Air Quality	<b>Date:</b>	01/21/2025
---	--	--------------	------------

1 **R307. Environmental Quality, Air Quality.**

2 **R307-150. Emission Inventories.**

3 **R307-150-1. Purpose and General Requirements.**

4 (1) The purpose of Rule R307-150 is to establish:

5 (a) ~~[to establish]~~by rule, the time frame, pollutants, and information that sources ~~[must]~~shall include  
6 in inventory submittals; and

7 (b) ~~[to establish]~~consistent reporting requirements for stationary sources in Utah to determine  
8 whether sulfur dioxide emissions remain below the sulfur dioxide milestones established in the State  
9 Implementation Plan for Regional Haze, ~~[s]~~Section XX.E.1.a, incorporated by reference, in Section R307-  
10 110-28.

11 (2) The requirements of Rule R307-150 replace any annual inventory reporting requirements in  
12 approval orders or operating permits issued ~~[prior to]~~before December 4, 2003.

13 (3) Emission inventories shall be submitted on or before April 15 of each year following the  
14 calendar year for which an inventory is required. The inventory shall be submitted in a format specified by  
15 the Division of Air Quality following consultation with each source.

16 (4) The ~~[executive secretary]~~Director may require at any time a full or partial~~[-]~~-year inventory upon  
17 reasonable notice to affected sources when it is determined that the inventory is necessary to develop a state  
18 implementation plan, to assess whether there is a threat to public health or safety or the environment, or to  
19 determine whether the source is in compliance with Title R307.

20 (5) Recordkeeping ~~[R]~~requirements include the following~~[-]~~:

21 (a) ~~[E]~~each owner or operator of a stationary source subject to this rule shall maintain a copy of the  
22 emission inventory submitted to the Division of Air Quality and records indicating how the information  
23 submitted in the inventory was determined, including any calculations, data, measurements, and estimates  
24 used~~[-]~~; ~~[-The records under Section R307-150-4 shall be kept for ten years. Other records shall be kept for a~~  
25 ~~period of at least five years from the due date of each inventory.]~~

26 (i) the records under Section R307-150-4 shall be kept for ten years;

27 (ii) other records shall be kept for a period of at least five years from the due date of each inventory;

28 (b) ~~[F]~~the owner or operator of the stationary source shall make these records available for  
29 inspection by any representative of the Division of Air Quality during normal business hours.  
30

31 **R307-150-2. Definitions.**

32 The following additional definitions apply to Rule R307-150; ~~[-]~~and all references to the "Threshold  
33 Limit Values for chemical Substances and Physical Agents and Biological Exposure Indices" adopted by the  
34 American Conference of Governmental Industrial Hygienists refers to the 2003 version, which is hereby  
35 incorporated by reference.

36 ~~-----~~"Acute pollutant" means any noncarcinogenic air pollutant for which a threshold limit value ~~ceiling~~  
37 (TLV-C) has been adopted by the American Conference of Governmental Industrial Hygienists in its  
38 "Threshold Limit Values for Chemical Substances and Physical Agents and Biological Exposure Indices,"  
39 2003 edition.

40 ~~-----~~"Carcinogenic pollutant" means any air pollutant that is classified as a known human carcinogen  
41 (A1) or suspected human carcinogen (A2) by the American Conference of Governmental Industrial  
42 Hygienists in its "Threshold Limit Values for Chemical Substances and Physical Agents and Biological  
43 Exposure Indices," 2003 edition.

44 ~~-----~~"Chronic Pollutant" means any noncarcinogenic air pollutant for which a threshold limit value ~~time~~  
45 weighted average (TLV-TWA) having no threshold limit value ~~ceiling~~ (TLV-C) has been adopted by the  
46 American Conference of Governmental Industrial Hygienists in its "Threshold Limit Values for Chemical  
47 Substances and Physical Agents and Biological Exposure Indices," 2003 edition.

48 ~~-----~~"Dioxins" and "Furans" mean total tetra ~~through~~ octachlorinated dibenzo-p-dioxins and  
49 dibenzofurans.]

50 "Emissions unit" means emissions unit as defined in Section R307-415-3.

51 "Large Major Source" means a major source that emits or has the potential to emit 2,500 tons or  
52 more per year of oxides of sulfur, oxides of nitrogen, or carbon monoxide, or that emits or has the potential to  
53 emit 250 tons or more per year of PM<sub>10</sub>, PM<sub>2.5</sub>, volatile organic compounds, or ammonia.

54 "Lead" means elemental lead and the portion of its compounds measured as elemental lead.

55 "Major Source" means major source as defined in Section R307-415-3.

1 “Mobile Emissions” means emissions from mobile sources as defined in 40 CFR § 51.491 which  
2 never leave the property line.

3  
4 **R307-150-3. Applicability.**

5 (1) Section R307-150-4 applies to stationary sources with actual emissions of 100 tons or more per  
6 year of sulfur dioxide in calendar year 2000 or any subsequent year unless exempted in Subsection R307-  
7 150-3(1)([a]b).~~[- Sources subject to Subsection R307-150-4 may be subject to other sections of Rule R307-~~  
8 ~~150-]~~

9 (a) Stationary sources subject to Subsection R307-150-3(1) that emit less than 100 tons per year of  
10 sulfur dioxide in any subsequent year shall remain subject to Section R307-150-4.

11 (b) Stationary sources that meet the requirements of Subsection R307-150-3(1) that have  
12 permanently ceased operation are exempt from the requirements of Section R307-150-4 for the years during  
13 which the source did not operate at any time during the year, except for the Carbon Power Plant, which,  
14 beginning with 2016 emissions, the Division of Air Quality shall include emissions of 8,005 tons per year of  
15 sulfur dioxide in the annual regional sulfur dioxide milestone report required as part of the Regional Haze  
16 State Implementation Plan.

17 (c) Sources subject to Section R307-150-4 may be subject to other sections of Rule R307-150.

18 ~~[(a) A stationary source that meets the requirements of Subsection R307-150-3(1) that has~~  
19 ~~permanently ceased operation is exempt from the requirements of Section R307-150-4 for the years during~~  
20 ~~which the source did not operate at any time during the year.~~

21 ~~[(b) Notwithstanding Subsection R307-150-3(1)(a), beginning with 2016 emissions, the Division of~~  
22 ~~Air Quality will include emissions of 8,005 tons per year of sulfur dioxide for the Carbon Power Plant in the~~  
23 ~~annual regional sulfur dioxide milestone report required as part of the Regional Haze State Implementation~~  
24 ~~Plan.~~

25 ~~[(c) Except as provided in Subsection R307-150-3(1)(a), any source that meets the criteria of~~  
26 ~~Subsection R307-150-3(1) and that emits less than 100 tons per year of sulfur dioxide in any subsequent year~~  
27 ~~shall remain subject to the requirements of Section R307-150-4 until 2018 or until the first control period~~  
28 ~~under the Western Backstop Sulfur Dioxide Trading Program as established in Subsection R307-250-~~  
29 ~~12(1)(a), whichever is earlier.]~~

30 (2) Section R307-150-5 applies to large major sources.

31 (3) Section R307-150-6 applies to each:

32 (a) ~~[each]~~major source that is not a large major source;

33 (b) ~~[each]~~source with the potential to emit ~~[\$]~~five tons or more per year of lead;

34 (c) ~~[each]~~source not included in Subsection~~[s]~~ R307-150-3(2), R307-150-3(3)(a), or R307-150-  
35 3(3)(b) that is located in Davis, Salt Lake, Utah, or Weber Counties and that has the potential to emit 25 tons  
36 or more per year of any combination of oxides of nitrogen, oxides of sulfur and PM<sub>10</sub>, or the potential to emit  
37 ~~[40]~~ten tons or more per year of volatile organic compounds; and

38 (d) ~~[each]~~Part 70 source not included in Subsection~~[s]~~ R307-150-3(2), R307-150-3(3)(a), R307-  
39 150-3(3)(b), or R307-150-3(3)(c).

40 (4) Section R307-150-8 applies to sources with Standard Industrial Classification codes in the major  
41 group 13 that have uncontrolled actual emissions greater than one ton per year for a single pollutant of PM<sub>10</sub>,  
42 PM<sub>2.5</sub>, oxides of nitrogen, oxides of sulfur, carbon monoxide, or volatile organic compounds. These sources  
43 include, ~~[but are not limited to,]~~industries involved in oil and natural gas exploration, production, and  
44 transmission operations~~;~~, well production facilities~~;~~, natural gas compressor stations~~;~~, ~~[and]~~natural gas  
45 processing plants, and commercial oil and gas disposal wells, and ponds.

46 (a) Sources that require inventory submittals under Subsections R307-150-3(1) through ~~[R307-150-~~  
47 ~~3]~~(3) are excluded from the requirements of Section R307-150-8.

48 (5) Section R307-150-9 applies to stationary sources located in a designated ozone nonattainment  
49 area that have the potential to emit oxides of nitrogen or volatile organic compounds greater than 25 tons per  
50 year.

51  
52 **R307-150-4. Sulfur Dioxide Milestone Inventory Requirements.**

53 (1) Annual Sulfur Dioxide Emission Report requirements are as follows.

54 (a) Sources identified in Subsection R307-150-3(1) shall submit an annual inventory of sulfur  
55 dioxide emissions beginning with calendar year 2003 for emissions units including fugitive emissions.

1 (b) The inventory shall include the rate and period of emissions, excess or breakdown emissions,  
2 startup and shut down emissions, the specific emissions unit that is the source of the air pollution, type and  
3 efficiency of the air pollution control equipment, percent of sulfur content in fuel and how the percent is  
4 calculated, and other information necessary to quantify operation and emissions and to evaluate pollution  
5 control efficiency. The emissions of a pollutant shall be calculated using the source's actual operating hours,  
6 production rates, and types of materials processed, stored, or combusted during the inventoried [~~time~~]period.

7 (2) Each source subject to Section R307-150-4 that is also subject to 40 CFR Part 75 reporting  
8 requirements shall submit a summary report of annual sulfur dioxide emissions that were reported to the  
9 Environmental Protection Agency under 40 CFR Part 75 in lieu of the reporting requirements in Subsection  
10 (1)[~~above~~].

11 (3) Changes in Emission Measurement Techniques include: [~~Each source subject to Section R307-~~  
12 ~~150-4 that uses a different emission monitoring or calculation method than was used to report their sulfur~~  
13 ~~dioxide emissions in 2006 under Rule R307-150 or 40 CFR Part 75 shall adjust their reported emissions to be~~  
14 ~~comparable to the emission monitoring or calculation method that was used in 2006. The calculations that~~  
15 ~~are used to make this adjustment shall be included with the annual emission report.]~~

16 (a) each source subject to Section R307-150-4 that uses a different emission monitoring or  
17 calculation method than was used to report their sulfur dioxide emissions in 2006 under Rule R307-150 or 40  
18 CFR Part 75 shall adjust their reported emissions to be comparable to the emission monitoring or calculation  
19 method that was used in 2006; and

20 (b) the calculations that are used to make this adjustment shall be included with the annual emission  
21 report.

#### 22 23 **R307-150-5. Sources Identified in Subsection R307-150-3(2), Large Major Source Inventory** 24 **Requirements.**

25 (1) Each large major source shall submit an emission inventory annually beginning with calendar  
26 year 2002. The inventory shall include PM<sub>10</sub>, PM<sub>2.5</sub>, oxides of sulfur, oxides of nitrogen, carbon monoxide,  
27 volatile organic compounds, and ammonia for emissions units including fugitive and mobile emissions.

28 (2) For every third year beginning with 2005, the inventory shall also include [~~all~~]any other  
29 chargeable pollutants and hazardous air pollutants [~~not exempted in Section R307-150-7~~].

30 (3) For each pollutant specified in Subsection (1) or (2)[~~above~~], the inventory shall include the rate  
31 and period of emissions, excess or breakdown emissions, startup and shut down emissions, the specific  
32 emissions unit that is the source of the air pollution, composition of air pollutant, type and efficiency of the  
33 air pollution control equipment, and other information necessary to quantify operation and emissions and to  
34 evaluate pollution control efficiency. The emissions of a pollutant shall be calculated using the source's  
35 actual operating hours, production rates, and types of materials processed, stored, or combusted during the  
36 inventoried [~~time~~]period.

#### 37 38 **R307-150-6. Sources Identified in Subsection R307-150-3(3).**

39 (1) Each source identified in Subsection R307-150-3(3) shall submit an inventory every third year  
40 beginning with calendar year 2002 for emissions units including fugitive and mobile emissions.

41 (a) The inventory shall include PM<sub>10</sub>, PM<sub>2.5</sub>, oxides of sulfur, oxides of nitrogen, carbon monoxide,  
42 volatile organic compounds, ammonia, other chargeable pollutants, and hazardous air pollutants not  
43 exempted in Section R307-150-7.

44 (b) For each pollutant, the inventory shall include the rate and period of emissions, excess or  
45 breakdown emissions, startup and shut down emissions, the specific emissions unit which is the source of the  
46 air pollution, composition of air pollutant, type and efficiency of the air pollution control equipment, and  
47 other information necessary to quantify operation and emissions and to evaluate pollution control efficiency.  
48 The emissions of a pollutant shall be calculated using the source's actual operating hours, production rates,  
49 and types of materials processed, stored, or combusted during the inventoried [~~time~~]period.

50 (2) Sources identified in Subsection R307-150-3(3) shall submit an inventory for each year after  
51 2002 in which the total amount of PM<sub>10</sub>, oxides of sulfur, oxides of nitrogen, carbon monoxide, or volatile  
52 organic compounds increases or decreases by 40 tons or more per year from the most recently submitted  
53 inventory. For each pollutant, the inventory shall meet the requirements of Subsections R307-150-6(1)(a)  
54 and R307-150-6(1)(b).

1 **[R307-150-7. Exempted Hazardous Air Pollutants.**

2 ~~\_\_\_\_\_ (1) The following air pollutants are exempt from this rule if they are emitted in an amount less than~~  
3 ~~that listed in Table 1.~~

4  
5 **TABLE 1**

POLLUTANT	Pounds/year
Arsenic	0.21
Benzene	33.90
Beryllium	0.04
Ethylene oxide	38.23
Formaldehyde	5.83

13  
14 ~~\_\_\_\_\_ (2) Hazardous air pollutants, except for dioxins or furans, are exempt from being reported if they are~~  
15 ~~emitted in an amount less than the smaller of the following:~~

16 ~~\_\_\_\_\_ (a) 500 pounds per year; or~~

17 ~~\_\_\_\_\_ (b) for acute pollutants, the applicable TLV-C expressed in milligrams per cubic meter and~~  
18 ~~multiplied by 15.81 to obtain the pounds per year threshold; or~~

19 ~~\_\_\_\_\_ (c) for chronic pollutants, the applicable TLV-TWA expressed in milligrams per cubic meter and~~  
20 ~~multiplied by 21.22 to obtain the pounds per year threshold; or~~

21 ~~\_\_\_\_\_ (d) for carcinogenic pollutants, the applicable TLV-C or TLV-TWA expressed in milligrams per~~  
22 ~~cubic meter and multiplied by 7.07 to obtain the pounds per year threshold.]~~

23  
24 **R307-150-[8]7. Crude Oil and Natural Gas Source Category.**

25 (1) Sources identified in Subsection R307-150-3(4) shall submit an inventory every third year  
26 beginning with the 2017 calendar year for emission units. The inventory shall:

27 (a) ~~[The inventory shall]~~include the total emissions for PM<sub>10</sub>, PM<sub>2.5</sub>, oxides of sulfur, oxides of  
28 nitrogen, carbon monoxide and volatile organic compounds for each emission unit at the source[-]and ~~[T]~~the  
29 emissions of a pollutant shall be calculated using the emission unit's actual operating hours, product rates, and  
30 types of materials processed, stored, or combusted during the inventoried ~~[time]~~period[-];

31 (b) ~~[The inventory shall]~~include the type and efficiency of air pollution control equipment[-]; and

32 (c) ~~[The inventory shall]~~be submitted in an electronic format determined by the Director specific to  
33 this source category.

34  
35 **R307-150-[9]8. Annual Ozone Emission Statement.**

36 (1) Beginning in the year 2021, sources identified in Subsection R307-150-3(5) shall submit an  
37 ozone emission statement to the Division of Air Quality annually by April 15 of each year for the previous  
38 year's emissions.

39 (2) A source required to submit an emission statement shall provide the following minimum  
40 information:

41 (a) a certification that the information contained in the statement is accurate to the best knowledge of  
42 the individual certifying the statement;

43 (b) the physical location where actual emissions occurred;

44 (c) the name and address of person or entity operating or owning the source;

45 (d) the nature of the source; and

46 (e) the total actual emissions of oxides of nitrogen and volatile organic compounds in tons per year  
47 for each emission unit.

48 (3) Emission statements shall be submitted in an electronic format determined by the Director.

49  
50 **KEY: air pollution, reports, inventories**

51 **Date of Last Change: September 3, 2020**

52 **Notice of Continuation: November 1, 2023**

53 **Authorizing, and Implemented or Interpreted Law: 19-2-104(1)(c)**

# ITEM 8



State of Utah

SPENCER J. COX  
*Governor*

DEIDRE HENDERSON  
*Lieutenant Governor*

Department of  
Environmental Quality

Kimberly D. Shelley  
*Executive Director*

DIVISION OF AIR QUALITY  
Bryce C. Bird  
*Director*

DAQ-013-25

**MEMORANDUM**

**TO:** Air Quality Board

**THROUGH:** Bryce C. Bird, Executive Secretary

**THROUGH:** Erica Pryor, Rules Coordinator

**FROM:** Ana Williams, Environmental Engineer

**DATE:** January 27, 2025

**SUBJECT:** PROPOSE FOR PUBLIC COMMENT: Amendment to Section R307-110-17. Section IX, Control Measures for Area and Point Sources, Part H, Emission Limits; and Amendments to Utah State Implementation Plan, Section IX.H.11 and Section IX.H.12: Emission Limitations and Operating Practices.

---

On November 6, 2020, the Environmental Protection Agency (EPA) proposed “Approval and Promulgation of Implementation Plans; State of Utah; Salt Lake City and Provo, Utah PM<sub>2.5</sub> Redesignations to Attainment and Utah State Implementation Plan Revisions.” (85 FR 71023). This proposal included approval of Utah’s moderate and serious State Implementation Plans (SIPs) for the 2006 24-hr PM<sub>2.5</sub> standard for the Salt Lake City nonattainment area (SLC NAA) and the Provo NAA. EPA received adverse public comments regarding how best available control technology (BACT) was addressed for the four major point source refineries included in the SLC NAA. Over the past four years, the division has worked closely with EPA and the refineries to address the comments, resulting in these “Part H” SIP amendments.

The proposed amendments to Part H that are incorporated in the SIP through Section R307-110-17 result in the change of specific emission limitations for five major industrial sources located within the serious PM<sub>2.5</sub> NAAs, as well as a clarification in the Recordkeeping and Reporting General Requirements for all major industrial sources located within the serious PM<sub>2.5</sub> NAAs. These emission limitations serve to fulfill Utah’s statutory obligations under Section 189(b) of the Clean Air Act.

The emission limitations proposed in this rulemaking will replace the existing source-wide PM<sub>2.5</sub>, nitrogen oxides (NO<sub>x</sub>), and sulfur dioxide (SO<sub>2</sub>) limitations originally adopted by the Air Quality Board on January 2, 2019, for four major industrial sources: Big West Oil LLC Refinery, Chevron Products Company – Salt Lake Refinery, Holly Corporation: Holly Frontier Sinclair Refinery, and Tesoro Refining and Marketing Company LLC Marathon Refinery: Salt Lake City Refinery. The existing source-wide PM<sub>2.5</sub>, NO<sub>x</sub>, and SO<sub>2</sub> limitations are being removed at the direction of the EPA as they determined that the limitations did not meet the definition of BACT. Emissions at the sources will continue to be controlled and meet BACT requirements through the existing “Petroleum Refineries” requirements found in Section IX.H.11. General Requirements in conjunction with the new NO<sub>x</sub> emission limitations that have been added to Section IX.H.12. Source-Specific Emission Limitations for each of the listed refineries. Details regarding the additional analysis that identified the proposed emission limitations and supporting information surrounding these proposed changes can be found in the documentation associated with the proposed revisions. Amendments were also made to Hexcel’s Part H requirements and there is an additional memo in this package that includes details.

During the final stages of state rulemaking, EPA will propose rulemaking at the federal level, review public comments, and finalize. This entire process must be complete by the end of the calendar year in 2025 to align with the projected modeling years included in the maintenance plan attainment demonstration.

Recommendation: Staff recommend the Board approve the amendments to Section R307-110-17; and amendments to Utah State Implementation Plan, Section IX.H.11 and Section IX.H.12: Emission Limitations and Operating Practices, for a 30-day public comment period.

**State of Utah**  
**Administrative Rule Analysis**  
Revised May 2024

**NOTICE OF SUBSTANTIVE CHANGE**

**TYPE OF FILING:** Amendment

**Rule or Section Number:**

**R307-110-17**

**Filing ID: Office Use Only**

**Date of Previous Publication (Only for CPRs):**

Click or tap to enter a date.

**Agency Information**

<b>1. Title catchline:</b>	Air Quality, Environmental Quality	
<b>Building:</b>	Multi-Agency State Office Building	
<b>Street address:</b>	195 N 1950 W	
<b>City, state:</b>	Salt Lake City	
<b>Mailing address:</b>	PO Box 144820	
<b>City, state and zip:</b>	Salt Lake City, UT 84114-4820	
<b>Contact persons:</b>		
<b>Name:</b>	<b>Phone:</b>	<b>Email:</b>
Ana Williams	801-536-4153	anawilliams@utah.gov
Erica Pryor	385-499-3416	epryor1@utah.gov

**Please address questions regarding information on this notice to the persons listed above.**

**General Information**

**2. Rule or section catchline:**

R307-110-17. Section IX, Control Measures for Area and Point Sources, Part H, Emission Limits.

**3. Purpose of the new rule or reason for the change:**

The purpose of the amendment to Section R307-110-17 is to amend the Utah State Implementation Plan, Subsections IX.H.11 and IX.H.12 Emission Limits and Operating Practices to comply with the Clean Air Act requirements for Serious PM2.5 nonattainment areas as listed in Title 40 Code of Federal Regulations, Part 51, Subpart Z (40 CFR 51 Subpart Z). Section R307-110-17 incorporates amendments to Subsections IX.H.11 and IX.H.12 into the rule and shall be amended to change the Board adoption date to the anticipated adoption date of the amended plan.

**4. Summary of the new rule or change:**

This rule amendment is in response to feedback and direction provided by the US Environmental Protection Agency after the original submittal of the Utah Serious PM2.5 nonattainment area State Implementation Plan as adopted by the Utah Air Quality Board on January 2, 2019. The following rule amendments are proposed: (1) Additional recordkeeping and reporting requirements under Subsection IX.H.11 General Requirements. (2) The removal of source-wide PM2.5, NOx, and SO2 caps for four sources under Subsection IX.H.12 Source-Specific Emission Limitations. (3) The addition of new NOx limitations for the same four sources under Subsection IX.H.12 Source-Specific Emission Limitations. (4) Minor changes to reflect current process units at two sources under Subsection IX.H.12 Source-Specific Emission Limitations.

**Fiscal Information**

**5. Provide an estimate and written explanation of the aggregate anticipated cost or savings to:**

**A) State budget:**

This rule amendment is not expected to create additional costs or savings for the state government. These facilities are already permitted and inspected under existing rules and have existing stack testing requirements in place. Inspectors will be able to confirm compliance as part of normal stack testing processes.

**B) Local governments:**

This rule amendment is not expected to impact local governments; therefore, no costs or savings are anticipated.

**C) Small businesses** ("small business" means a business employing 1-49 persons):

This rule amendment is not expected to impact small businesses; therefore, no costs or savings are anticipated.

**D) Non-small businesses** ("non-small business" means a business employing 50 or more persons):

The Utah Division of Air Quality anticipates that these changes to the proposed rule will impact four non-small businesses. The impacts are described below.

These changes will require new stack testing requirements on 12 emission units located across four non-small businesses. Stack testing costs were calculated based on information submitted to the UDAQ as part of the BACT/BACM process in 2017 for the PM2.5 Serious SIP. Assuming an average of \$5,441 for stack testing costs, and accounting for inflation changes from 2017 to 2025, an average stack testing value of \$7,071.38 was used. Stack tests will be required every three years. Therefore, for 12 units stack testing every three years across four non-small businesses, the estimated impact will be \$84,856.56 every three years.

**E) Persons other than small businesses, non-small businesses, state, or local government entities** ("person" means any individual, partnership, corporation, association, governmental entity, or public or private organization of any character other than an *agency*):

This amendment does not apply to persons other than small business, non-small businesses, state, or local government entities; therefore, no additional costs are expected because of these changes.

**F) Compliance costs for affected persons** (How much will it cost an impacted entity to adhere to this rule or its changes?):

Compliance costs will consist of additional stack testing for four non-small businesses. The impacts are described below.

Compliance costs are estimated at \$84,856.56 every three years for additional stack testing requirements.

**G) Regulatory Impact Summary Table** (This table only includes fiscal impacts that could be measured. If there are inestimable fiscal impacts, they will not be included in this table. Inestimable impacts will be included in narratives above.)

Regulatory Impact Table			
Fiscal Cost	FY2025	FY2026	FY2027
State Government	\$0	\$0	\$0
Local Governments	\$0	\$0	\$0
Small Businesses	\$0	\$0	\$0
Non-Small Businesses	\$0	\$0	\$0
Other Persons	\$0	\$0	\$0
<b>Total Fiscal Cost</b>	<b>\$0</b>	<b>\$0</b>	<b>\$0</b>
Fiscal Benefits	FY2025	FY2026	FY2027
State Government	\$0	\$0	\$0
Local Governments	\$0	\$0	\$0
Small Businesses	\$0	\$0	\$0
Non-Small Businesses	\$84,856.56	\$0	\$0
Other Persons	\$0	\$0	\$0
<b>Total Fiscal Benefits</b>	<b>\$0</b>	<b>\$0</b>	<b>\$0</b>
<b>Net Fiscal Benefits</b>	<b>\$0</b>	<b>\$0</b>	<b>\$0</b>

**H) Department head comments on fiscal impact and approval of regulatory impact analysis:**

The Executive Director of the Department of Environmental Quality, Kim D. Shelley, has reviewed and approved this regulatory impact analysis.

**Citation Information**

**6. Provide citations to the statutory authority for the rule. If there is also a federal requirement for the rule, provide a citation to that requirement:**

Section 19-6a-1642	Section 19-2-104	

**Incorporations by Reference Information**

**7. Incorporations by Reference** (if this rule incorporates more than two items by reference, please include additional tables):

**A) This rule adds or updates the following title of materials incorporated by references** (a copy of materials incorporated

by reference must be submitted to the Office of Administrative Rules; <i>if none, leave blank</i> ):	
<b>Official Title of Materials Incorporated (from title page)</b>	Section IX, Control Measures for Area and Point Sources, Part H, Emission Limits.
<b>Publisher</b>	
<b>Issue Date</b>	05/05/2025
<b>Issue or Version</b>	

**B) This rule adds or updates the following title of materials incorporated by references** (a copy of materials incorporated by reference must be submitted to the Office of Administrative Rules; *if none, leave blank*):

<b>Official Title of Materials Incorporated (from title page)</b>	
<b>Publisher</b>	
<b>Issue Date</b>	
<b>Issue or Version</b>	

**Public Notice Information**

**8. The public may submit written or oral comments to the agency identified in box 1.** (The public may also request a hearing by submitting a written request to the agency. See Section 63G-3-302 and Rule R15-1 for more information.)

**A) Comments will be accepted until:** 03/31/2025

**B) A public hearing (optional) will be held:**

<b>Date (mm/dd/yyyy):</b>	<b>Time (hh:mm AM/PM):</b>	<b>Place (physical address or URL):</b>
TBD	TBD	

**To the agency:** If more than one hearing will take place, continue to add rows.

**9. This rule change MAY become effective on:** 04/07/2025

NOTE: The date above is the date the agency anticipates making the rule or its changes effective. It is NOT the effective date.

**Agency Authorization Information**

**To the agency:** Information requested on this form is required by Sections 63G-3-301, 63G-3-302, 63G-3-303, and 63G-3-402. Incomplete forms will be returned to the agency for completion, possibly delaying publication in the *Utah State Bulletin* and delaying the first possible effective date.

<b>Agency head or designee and title:</b>	Bryce C. Bird, Director, Division of Air Quality	<b>Date:</b>	01/23/2025
---	--	--------------	------------

1 **R307. Environmental Quality, Air Quality.**  
2 **R307-110. General Requirements: State Implementation Plan.**  
3 **R307-110-17. Section IX, Control Measures for Area and Point Sources, Part H, Emission Limits.**  
4 The Utah State Implementation Plan, Section IX, Control Measures for Area and Point Sources,  
5 Part H, Emission Limits and Operating Practices, as most recently amended by the Utah Air Quality  
6 Board on [~~September 12, 2023~~February 5, 2025], pursuant to Section 19-2-104, is incorporated by  
7 reference and made a part of Rule R307-110.  
8  
9 **KEY: air pollution, PM10, PM2.5, ozone**  
10 **Date of Last Change: February 7, 2024**  
11 **Notice of Continuation: December 1, 2021**  
12 **Authorizing, and Implemented or Interpreted Law: 19-2-104**

1 **H.11. General Requirements: Control Measures for Area and Point**  
2 **Sources, Emission Limits and Operating Practices, PM<sub>2.5</sub>**  
3

- 4 a. Except as otherwise outlined in individual conditions of this Subsection IX.H.11 listed  
5 below, the terms and conditions of this Subsection IX.H.11 shall apply to all sources  
6 subsequently addressed in Subsection IX.H.12 and 13. Should any inconsistencies  
7 exist between these subsections, the source specific conditions listed in IX.H.12 and 13  
8 shall take precedence.  
9
- 10 b. Definitions:
- 11
- 12 i. The definitions contained in R307-101-2, Definitions, apply to Section IX, Part H.  
13
- 14 ii. Natural gas curtailment means a period of time during which the supply of natural gas  
15 to an affected facility is halted for reasons beyond the control of the facility. The act  
16 of entering into a contractual agreement with a supplier of natural gas established  
17 for curtailment purposes does not constitute a reason that is under the control of a  
18 facility for the purposes of this definition. An increase in the cost or unit price of  
19 natural gas does not constitute a period of natural gas curtailment.  
20
- 21 c. Recordkeeping and Reporting:
- 22
- 23 i. Any information used to determine compliance shall be recorded for all periods when  
24 the source is in operation, and such records shall be kept for a minimum of five years.  
25 Any or all of these records shall be made available to the Director upon request.  
26
- 27 ii. Each source shall comply with all applicable sections of R307-150 Emission  
28 Inventories.  
29
- 30 iii. Each source shall submit a report of any deviation from the applicable  
31 requirements of this Subsection IX.H, including those attributable to upset  
32 conditions, the probable cause of such deviations, and any corrective actions or  
33 preventive measures taken. The report shall be submitted to the Director no later  
34 than 24-months following the deviation or earlier if specified by an underlying  
35 applicable requirement. Deviations due to breakdowns shall be reported according  
36 to the breakdown provisions of R307-107.  
37
- 38 iv. Each source shall comply with all applicable recordkeeping and reporting  
39 sections of their most recently issued Title V Operating Permit, including  
40 all requirements associated with the submission of annual compliance  
41 certifications and biannual monitoring reports. If more stringent or  
42 additional requirements are listed in Subsections IX.H.12 and IX.H.13,  
43 each source shall comply with those requirements.  
44
- 45 v. Each source shall comply with all applicable recordkeeping and reporting  
46 as required in 40 CFR 60 and 40 CFR 63 requirements.  
47
- 48
- 49 d. Emission Limitations:
- 50
- 51 i. All emission limitations listed in Subsections IX.H.12 and IX.H.13 apply at all times,  
52 unless otherwise specified in the source specific conditions listed in IX.H.12 and 13.  
53

- 1                   ii. All emission limitations of particulate matter (PM<sub>2.5</sub>) listed in Subsections  
2                   IX.H.12 and IX.H.13 include both filterable PM<sub>2.5</sub> and condensable PM, unless  
3                   otherwise specified in the source specific conditions listed in IX.H.12 and IX.H.13.  
4

5 e. Stack Testing:  
6

- 7                   i. As applicable, stack testing to show compliance with the emission limitations for the  
8                   sources in Subsection IX.H.12 and 13 shall be performed in accordance with the  
9                   following:  
10

- 11                   A. Sample Location: The emission point shall be designed to conform to the  
12                   requirements of 40 CFR 60, Appendix A, Method 1, or other EPA-approved  
13                   testing methods acceptable to the Director. Occupational Safety and Health  
14                   Administration (OSHA) approvable access shall be provided to the test  
15                   location.  
16  
17                   B. Volumetric Flow Rate: 40 CFR 60, Appendix A, Method 2 or EPA Test Method  
18                   No. 19 "SO<sub>2</sub> Removal & PM, SO<sub>2</sub>, NO<sub>x</sub> Rates from Electric Utility  
19                   Steam Generators" or other EPA-approved testing methods acceptable to the  
20                   Director.  
21  
22                   C. PM: 40 CFR 60, Appendix A, Methods 5, 5b, 5f, 17 or other  
23                   EPA approved testing methods acceptable to the Director.  
24  
25                   D. PM<sub>2.5</sub>: 40 CFR 51, Appendix M, 201a and 202, or other EPA approved  
26                   testing methods acceptable to the Director. The back half condensables shall be  
27                   used for compliance demonstration as well as for inventory purposes. If a  
28                   method other than 201a is used, the portion of the front half of the catch  
29                   considered PM<sub>2.5</sub> shall be based on information in Appendix B of the fifth  
30                   edition of the EPA document, AP-42, or other data acceptable to the  
31                   Director.  
32  
33                   E. SO<sub>2</sub>: 40 CFR 60 Appendix A, Method 6C, or other EPA-  
34                   approved testing methods acceptable to the Director.  
35  
36                   F. NO<sub>x</sub>: 40 CFR 60 Appendix A, Method 7E, or other EPA-approved  
37                   testing methods acceptable to the Director.  
38  
39                   G. VOC: 40 CFR 60 Appendix A, Method 25A or other EPA -approved  
40                   testing methods acceptable to the Director.  
41  
42                   H. Calculations: To determine mass emission rates (lb/hr, etc.) the  
43                   pollutant concentration as determined by the appropriate methods above shall be  
44                   multiplied by the volumetric flow rate and any necessary conversion factors to give  
45                   the results in the specified units of the emission limitation.  
46  
47                   I. A stack test protocol shall be provided at least 30 days prior to the  
48                   test. A pretest conference shall be held if directed by the  
49                   Director.  
50  
51                   J. The production rate during all compliance testing shall be no less than 90% of the  
52                   maximum production rate achieved in the previous three (3) years. If the desired  
53                   production rate is not achieved at the time of the test, the maximum production rate  
54                   shall be 110% of the tested achieved rate, but not more than the maximum  
55                   allowable production rate. This new allowable maximum production rate shall

1 remain in effect until successfully tested at a higher rate. The owner/operator shall  
2 request a higher production rate when necessary. Testing at no less than 90% of  
3 the higher rate shall be conducted. A new maximum production rate (110% of the  
4 new rate) will then be allowed if the test is successful. This process may be  
5 repeated until the maximum allowable production rate is achieved.  
6

7 f. Continuous Emission and Opacity Monitoring

8  
9 i. For all continuous monitoring devices, the following shall apply:

10 A. Except for system breakdown, repairs, calibration checks, and zero and span  
11 adjustments required under paragraph (d) 40 CFR 60.13, the owner/operator of  
12 an affected source shall continuously operate all required continuous  
13 monitoring systems and shall meet minimum frequency of operation requirements  
14 as outlined in R307-170 and 40 CFR 60.13. Flow measurement shall be in  
15 accordance with the requirements of 40 CFR 52, Appendix E; 40 CFR 60  
16 Appendix B; or 40 CFR 75, Appendix A.  
17

18 B. The monitoring system shall comply with all applicable sections of R307-170;  
19 40 CFR 13; and 40 CFR 60, Appendix B –Performance Specifications.  
20

21 ii. Opacity observations of emissions from stationary sources shall be conducted in  
22 accordance with 40 CFR 60, Appendix A, Method 9.  
23

24 g. Petroleum Refineries.

25  
26 i. Limits at Fluid Catalytic Cracking Units

27 A. FCCU SO<sub>2</sub> Emissions

28 I. Each owner or operator of an FCCU shall comply with an SO<sub>2</sub>  
29 emission limit of 25 ppmvd @ 0% excess air on a 365-day rolling  
30 average basis and 50 ppmvd @ 0% excess air on a 7-day rolling  
31 average basis.  
32

33 II. Compliance with this limit shall be determined using a CEM in accordance  
34 with IX.H.11.f.  
35

36 B. FCCU PM Emissions

37 I. Each owner or operator of an FCCU shall comply with an emission limit of  
38 1.0 pounds PM per 1000 pounds coke burn-off.  
39

40 II. Compliance with this limit shall be determined by following the stack test  
41 protocol specified in 40 C.F.R. §60.106(b) to measure PM emissions on  
42 the FCCU. Each owner operator shall conduct stack tests once every  
43 three (3) years at each FCCU.  
44

45 III. No later than January 1, 2019, each owner or operator of an FCCU subject to  
46 NSPS Ja shall install, operate and maintain a continuous parameter monitor  
47 system (CPMS) to measure and record operating parameters from the FCCU  
48 and control devices as per the requirements of 40 CFR 60.105a(b)(1). No later  
49 than January 1, 2019, each owner or operator of an FCCU not subject to  
50 NSPS Ja shall install, operate and maintain a continuous opacity monitoring  
51 system to measure and record opacity from the FCCU as per the  
52  
53  
54  
55

1 requirements of 40 CFR 63.1572(b) and comply with the opacity limitation as  
2 per the requirements of Table 7 to Subpart UUU of Part 63.

3  
4 ii. Limits on Refinery Fuel Gas

5  
6 A. All petroleum refineries in or affecting any PM2.5 nonattainment area or any  
7 PM10 nonattainment or maintenance area shall reduce the H2S content of the refinery  
8 plant gas to 60 ppm or less as described in 40 CFR 60.102a. Compliance shall be  
9 based on a rolling average of 365 days. The owner/operator shall comply with  
10 the fuel gas monitoring requirements of 40 CFR 60.107a and the related  
11 recordkeeping and reporting requirements of 40CFR60.108a. As used herein,  
12 refinery "plant gas" shall have the meaning of "fuel gas" as defined in 40  
13 CFR60.101a, and may be used interchangeably.

14  
15 B. For natural gas, compliance is assumed while the fuel comes from a public utility.

16  
17 iii. Limits on Heat Exchangers

18  
19 A. Each owner or operator shall comply with the requirements of 40 CFR 63.654  
20 for heat exchange systems in VOC service. The owner or operator may elect  
21 to use another EPA-approved method other than the Modified El Paso  
22 Method if approved by the Director.

23  
24 I. The following applies in lieu of 40 CFR 63.654(b): A heat exchange system  
25 is exempt from the requirements in paragraphs 63.654(c) through (g) of  
26 this section if it meets any one of the criteria in the following paragraphs  
27 (1) through (2) of this section.

28  
29 1. All heat exchangers that are in VOC service within the heat exchange  
30 system that either:

31  
32 a. Operate with the minimum pressure on the cooling water side at  
33 least 35 kilopascals greater than the maximum pressure on the  
34 process side; or

35  
36 b. Employ an intervening cooling fluid, containing less than 10 percent by  
37 weight of VOCs, between the process and the cooling water. This  
38 intervening fluid must serve to isolate the cooling water from the process  
39 fluid and must not be sent through a cooling tower or discharged.  
40 For purposes of this section, discharge does not include emptying  
41 for maintenance purposes.

42  
43 2. The heat exchange system cools process fluids that contain less than 10  
44 percent by weight VOCs (i.e., the heat exchange system does not  
45 contain any heat exchangers that are in VOC service).

46  
47 iv. Leak Detection and Repair Requirements

48  
49 A. Each owner or operator shall comply with the requirements of 40 CFR 60.590a to  
50 60.593a as soon as practicable.

51  
52 B. For units complying with the Sustainable Skip Period, previous process unit  
53 monitoring results may be used to determine the initial skip period interval provided  
54 that each valve has been monitored using the 500 ppm leak definition.  
55

1 v. Requirements on Hydrocarbon Flares

- 2
- 3 A. All hydrocarbon flares at petroleum refineries located in or affecting a
- 4 PM2.5 nonattainment area or any PM10 nonattainment or maintenance area
- 5 shall be subject to the flaring requirements of NSPS Subpart Ja (40 CFR
- 6 60.100a–109a), if not already subject under the flare applicability
- 7 provisions of Ja.
- 8
- 9 B. No later than January 1, 2019, all major source petroleum refineries in or
- 10 affecting any PM2.5 nonattainment area or any PM10 nonattainment or
- 11 maintenance area shall either 1) install and operate a flare gas recovery
- 12 system designed to limit hydrocarbon flaring produced from each affected flare
- 13 during normal operations to levels below the values listed in 40 CFR
- 14 60.103a(c), or 2) limit flaring during normal operations to 500,000 scfd for
- 15 each affected flare. Flare gas recovery is not required for dedicated SRU flare
- 16 and header systems, or HF flare and header systems.

17

18 vi. Requirements on Tank Degassing

- 19
- 20 A. Beginning January 1, 2017, the owner or operator of any stationary tank of 40,000-
- 21 gallon or greater capacity and containing or last containing any organic liquid, with
- 22 a true vapor pressure equal or greater than 10.5 kPa (1.52 psia) at storage temperature
- 23 (see R307-324-4(1)) shall not allow it to be opened to the atmosphere unless the
- 24 emissions are controlled by exhausting VOCs contained in the tank vapor-space to a
- 25 vapor control device until the organic vapor concentration is 10 percent or less of the
- 26 lower explosion limit (LEL).
- 27
- 28 B. These degassing provisions shall not apply while connecting or disconnecting
- 29 degassing equipment.
- 30
- 31 C. The Director shall be notified of the intent to degas any tank subject to the rule.
- 32 Except in an emergency situation, initial notification shall be submitted at least
- 33 three (3) days prior to degassing operations. The initial notification shall
- 34 include:
- 35
- 36 I. Start date and time;
- 37
- 38 II. Tank owner, address, tank location, and applicable tank permit numbers;
- 39
- 40 III. Degassing operator's name, contact person, telephone number;
- 41
- 42 IV. Tank capacity, volume of space to be degassed, and materials stored;
- 43
- 44 V. Description of vapor control device.
- 45

46 vii. No Burning of Liquid Fuel Oil in Stationary Sources

- 47
- 48 A. No petroleum refineries in or affecting any PM2.5 nonattainment area or
- 49 PM10 nonattainment or maintenance area shall be allowed to burn liquid
- 50 fuel oil in stationary sources except during natural gas curtailments or as
- 51 specified in the individual subsections of Section IX, Part H.
- 52
- 53 B. The use of diesel fuel meeting the specifications of 40 CFR ~~[80.510]~~1090.305
- 54 in standby or emergency equipment is exempt from the limitation of
- 55 IX.H.11.g.vii.A above.

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45

h. Catalytic Oxidation for VOC Control

i. Internal Combustion Engines

A. Emissions from each VOC catalytic-controlled IC engine shall be routed through the oxidation catalyst system prior to being emitted to the atmosphere. The oxidation catalyst system shall be installed and operated as outlined in 40 CFR 63.6625(e).

iii. Natural Gas Combustion Turbines

A. Emissions from each VOC catalytic-controlled combustion turbine shall be routed through the oxidation catalyst system prior to being emitted to the atmosphere. The oxidation catalyst system shall be installed and operated according to the manufacturer's emission-related written instructions and in a manner consistent with good air pollution control practice for minimizing emissions.

i. Good Combustion Practices for Emission Minimization

A. Each owner or operator shall operate all combustion units in accordance with good combustion practices and maintain all combustion units following the manufacturer's recommendations.

j. Recordkeeping and Reporting

A. In addition to the requirements specified in Section IX.H.11.c, each refinery shall comply with the following recordkeeping and reporting requirements, until such time that a Title V Operating Permit is issued. At that time, each refinery shall comply with the applicable recordkeeping and reporting sections of their most recently issued Title V Operating Permit.

i. All required monitoring data and support information required by Subsections IX.H.11 and IX.H.12 shall be retained by the source for a period of at least five years from the date of the monitoring sample, measurement, report, or application. Support information includes all calibration and maintenance records, all original strip-charts or appropriate readings for continuous monitoring instrumentation, and copies of all reports required by Subsections IX.H.11 and IX.H.12.

ii. Monitoring reports, if applicable, shall be submitted to the Director as specified in Subsections IX.H.11.e and IX.H.11.f.

1  
2 **H.12. Source-Specific Emission Limitations in Salt Lake City – UT PM<sub>2.5</sub>**  
3 **Nonattainment Area**

4 a. ATK Launch Systems Inc. Promontory

5  
6 i. During the period November 1 to February 28/29 on days when the 24-hour  
7 average PM<sub>2.5</sub> levels exceed 35 µg/m<sup>3</sup> at the nearest real-time monitoring station,  
8 the open burning of reactive wastes with properties identified in 40 CFR 261.23 (a)  
9 (6) (7) (8) may be conducted when the 24-hour average PM<sub>2.5</sub> levels exceed 35  
10 µg/m<sup>3</sup> at the nearest real time monitoring station in limited quantities. Limited  
11 quantities, as authorized in the facility’s RCRA Subpart X permit, of time sensitive  
12 reactive wastes may be open burned when the 24-hour average PM<sub>2.5</sub> levels  
13 exceed 35 µg/m<sup>3</sup> at the nearest real-time monitoring station.  
14

15 ii. During the period November 1 to February 28/29, on days when the 24-hour average  
16 PM<sub>2.5</sub> levels exceed 35 µg/m<sup>3</sup> at the nearest real-time monitoring station, the  
17 following shall not be tested:  
18

19 A. Propellant, energetics, pyrotechnics, flares and other reactive compounds greater  
20 than 2,400 lbs. per day; or  
21

22 B. Rocket motors less than 1,000,000 lbs. of propellant per motor subject to  
23 the following exception:  
24

25 I. A single test of rocket motors less than 1,000,000 lbs. of propellant per motor  
26 is allowed on a day when the 24-hour average PM<sub>2.5</sub> level exceeds 35 µg/m<sup>3</sup>  
27 at the nearest real-time monitoring station provided notice is given to the  
28 Director of the Utah Air Quality Division. No additional tests of rocket motors  
29 less than 1,000,000 lbs. of propellant may be conducted during the inversion  
30 period until the 24-hour average PM<sub>2.5</sub> level has returned to a  
31 concentration below 35 µg/m<sup>3</sup> at the nearest real-time monitoring  
32 station.  
33

34 C. During this period, records will be maintained identifying the size of the  
35 rocket motors tested and the 24-hour average PM<sub>2.5</sub> level at the nearest  
36 real-time monitoring station on days when motor testing occur.  
37

38 iii. Natural Gas-Fired Boilers

39 A. Building M-576

40  
41 I. One 71 MMBTU/hr boiler shall be upgraded with low NO<sub>x</sub> burners and flue  
42 gas recirculation by January 2016. The boiler shall be rated at a maximum of 9  
43 ppm. The remaining boiler shall not consume more than 100,000 MCF of  
44 natural gas per rolling 12- month period unless upgraded so the NO<sub>x</sub>  
45 emission rate is no greater than 30 ppm.  
46

47 II. Emissions to the atmosphere from the Cleaver Brooks 71  
48



1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49

~~Filterable PM<sub>2.5</sub>: 1.9  
lb/MMscf Condensable PM<sub>2.5</sub>:  
5.7 lb/MMscf~~

~~Plant gas:  
Filterable PM<sub>2.5</sub>: 1.9  
lb/MMscf Condensable PM<sub>2.5</sub>:  
5.7 lb/MMscf~~

~~Fuel Oil: The PM<sub>2.5</sub> emission factors shall be determined from the latest  
edition of AP-42 or other EPA approved methods.~~

~~FCC Stacks: The PM<sub>2.5</sub> emission factors shall be established by stack test.~~

~~Where mixtures of fuel are used in a Unit, the above factors shall be  
weighted according to the use of each fuel.~~

~~B. The default emission factors listed in IX.H.12.b.i.A above apply until  
such time as stack testing is conducted as provided in IX.H.11.e or as  
outlined below:~~

~~PM<sub>2.5</sub> stack testing on the FCC shall be performed initially no later than  
January 1, 2019 and at least once every three (3) years thereafter. Stack  
testing shall be performed as outlined in IX.H.11.e.~~

~~C. Compliance with the source wide PM<sub>2.5</sub> Cap shall be determined for each  
day as follows: Total 24-hour PM<sub>2.5</sub> emissions for the emission points  
shall be calculated by adding the daily results of the PM<sub>2.5</sub> emissions  
equations listed below for natural gas, plant gas, and fuel oil combustion.  
These emissions shall be added to the emissions from the FCC to arrive at  
a combined daily PM<sub>2.5</sub>  
emission total.~~

~~For purposes of this subsection a "day" is defined as a period of 24 hours  
commencing at midnight and ending at the following midnight.~~

~~Daily gas consumption shall be measured by meters that can delineate the  
flow of gas to the boilers, furnaces and the SRU incinerator.~~

~~The equation used to determine emissions from these units shall be as  
follows: Emissions = Emission Factor (lb/MMscf) \* Gas Consumption  
(MMscf/24 hrs)/(2,000  
lb/ton)~~

~~Daily fuel oil consumption shall be monitored by means of leveling gauges  
on all tanks that supply combustion sources.~~

~~The daily PM<sub>2.5</sub> emissions from the FCC shall be calculated using the following  
equation: E = FR \* EF~~

1  
2                   Where:

3                   E = Emitted PM2.5

4                   FR = Feed Rate to Unit (kbbbls/day)

5                   EF = emission factor (lbs/kbbbl), established by the most recent stack test

6  
7                   Results shall be tabulated for each day, and records shall be kept which include  
8                   the meter readings (in the appropriate units) and the calculated emissions.

9  
10                   ii. ~~Source-wide NO<sub>x</sub> Cap~~

11                   ~~No later than January 1, 2019, combined emissions of NO<sub>x</sub> shall not exceed~~  
12                   ~~0.80 tons per day (tpd) and 195 tons per rolling 12-month period.~~

13  
14                   A. ~~Setting of emission factors:~~

15  
16                   ~~The emission factors derived from the most current performance test shall be applied~~  
17                   ~~to the relevant quantities of fuel combusted. Unless adjusted by performance testing~~  
18                   ~~as discussed in IX.H.12.b.ii.B below, the default emission factors to be used are as~~  
19                   ~~follows:~~

20  
21                   ~~Natural gas: shall be determined from the latest edition of AP-42 or other~~  
22                   ~~EPA approved methods.~~

23                   ~~Plant gas: assumed equal to natural gas~~

24                   ~~Diesel fuel: shall be determined from the latest edition of AP-42 or other~~  
25                   ~~EPA approved methods.~~

26  
27                   ~~Where mixtures of fuel are used in a Unit, the above factors shall be weighted~~  
28                   ~~according to the use of each fuel.~~

29  
30                   B. ~~The default emission factors listed in IX.H.12.b.ii.A above apply until such time~~  
31                   ~~as stack testing is conducted as provided in IX.H.11.e or as outlined below:~~

32  
33                   ~~Initial NO<sub>x</sub> stack testing on natural gas/refinery fuel gas combustion~~  
34                   ~~equipment above 40 MMBtu/hr has been performed NO<sub>x</sub> emissions for the FCC~~  
35                   ~~are monitored with a continuous emission monitoring system. Refinery Boilers and~~  
36                   ~~heaters over 40 MMBtu/hr, but less than 100 MMBtu/hr, are in compliance with~~  
37                   ~~monitoring and work practice standards of Subpart DDDDD of Part 63.~~

38  
39                   C. ~~Compliance with the source-wide NO<sub>x</sub> Cap shall be determined for each day~~  
40                   ~~as follows: Total 24-hour NO<sub>x</sub> emissions shall be calculated by adding the~~  
41                   ~~emissions for each emitting unit. The emissions for each emitting unit shall be~~  
42                   ~~calculated by multiplying the hours of operation of a unit, feed rate to a unit, or~~  
43                   ~~quantity of each fuel combusted at each affected unit by the associated~~  
44                   ~~emission factor, and summing the results.~~

45  
46                   ~~Daily plant gas consumption at the furnaces, boilers and SRU incinerator shall~~  
47                   ~~be measured by flow meters. The equations used to determine emissions shall be~~  
48                   ~~as follows:~~

1  $NO_x = \text{Emission Factor (lb/MMscf)} * \text{Gas Consumption (MMscf/24 hrs)} / (2,000$   
2  $\text{lb/ton})$

3  
4 Where the emission factor is derived from the fuel used, as listed in IX.H.12.b.ii.A  
5 above Daily fuel oil consumption shall be monitored by means of leveling gauges  
6 on all tanks that supply combustion sources.

7  
8 The daily  $NO_x$  emissions from the FCC shall be calculated using a CEM as outlined  
9 in IX.H.11.f

10  
11 Total daily  $NO_x$  emissions shall be calculated by adding the results of the above  
12  $NO_x$  equations for natural gas and plant gas combustion to the estimate for the  
13 FCC.

14  
15 For purposes of this subsection a "day" is defined as a period of 24 hours  
16 commencing at midnight and ending at the following midnight.

17  
18 Results shall be tabulated for each day, and records shall be kept which include the  
19 meter readings (in the appropriate units) and the calculated emissions.

20  
21 ~~iii.—Source wide SO<sub>2</sub> Cap~~

22 ~~No later than January 1, 2019, combined emissions of SO<sub>2</sub> shall not exceed 0.60~~  
23 ~~tons per day and 140 tons per rolling 12 month period.~~

24 ~~A.—Setting of emission factors:~~

25 ~~The emission factors derived from the most current performance test shall be~~  
26 ~~applied to the relevant quantities of fuel combusted. The default emission factors~~  
27 ~~to be used are as follows:~~

28  
29 ~~Natural Gas—0.60 lb SO<sub>2</sub>/MMscf gas~~

30  
31 ~~Plant Gas: The emission factor to be used in conjunction with plant gas~~  
32 ~~combustion shall be determined through the use of a CEM as outlined in~~  
33 ~~IX.H.11.f.~~

34  
35 ~~SRUs: The emission rate shall be determined by multiplying the~~  
36 ~~sulfur dioxide concentration in the flue gas by the flow rate of the flue~~  
37 ~~gas. The sulfur dioxide concentration in the flue gas shall be determined~~  
38 ~~by CEM as outlined in IX.H.11.f.~~

39  
40 ~~Fuel oil: The emission factor to be used for combustion shall be calculated based~~  
41 ~~on the weight percent of sulfur, as determined by ASTM Method D 4294-89 or~~  
42 ~~EPA approved equivalent acceptable to the Director, and the density of the fuel oil,~~  
43 ~~as follows:~~

44  
45  ~~$EF \text{ (lb SO}_2\text{/k gal)} = \text{density (lb/gal)} * (1000 \text{ gal/k gal)} * \text{wt. \% S}/100 * (64 \text{ lb}$~~   
46  ~~$\text{SO}_2\text{/32 lbs)}$~~

47  
48 ~~Where mixtures of fuel are used in a Unit, the above factors shall be~~  
49 ~~weighted according to the use of each fuel.~~

~~B. Compliance with the source wide SO<sub>2</sub> Cap shall be determined for each day as follows:~~

~~Total daily SO<sub>2</sub> emissions shall be calculated by adding the daily SO<sub>2</sub> emissions for natural gas and plant fuel gas combustion, to those from the FCC and SRU stacks.~~

~~The daily SO<sub>x</sub> emissions from the FCC shall be calculated using a CEM as outlined in IX.H.11.f~~

~~Daily natural gas and plant gas consumption shall be determined through the use of flow meters.~~

~~Daily fuel oil consumption shall be monitored by means of leveling gauges on all tanks that supply combustion sources.~~

~~For purposes of this subsection a "day" is defined as a period of 24 hours commencing at midnight and ending at the following midnight.~~

~~Results shall be tabulated for each day, and records shall be kept which include CEM readings for H<sub>2</sub>S (averaged for each day), all meter readings (in the appropriate units), fuel oil parameters (density and wt% sulfur for each day any fuel oil is burned), and the calculated emissions.]~~

- i. NO<sub>x</sub> emissions to the atmosphere from the indicated emission points shall not exceed the following rates and concentrations. The averaging period for the following emission limits is determined on a 30-day rolling average.

<u>Emission Points</u>	<u>Emission Rate (lb/MMBtu)</u>
<u>1. FCC Heater H-101</u>	<u>0.1 lb/MMBtu</u>
<u>2. Reformer Heaters H-621, 622, 624</u>	<u>0.05 lb/MMBtu</u>
<u>3. #1 Boiler</u>	<u>0.035 lb/MMBtu</u>
<u>4. #6 Boiler</u>	<u>0.035 lb/MMBtu</u>

- ii. Initial NO<sub>x</sub> stack testing has been performed for the #1 Boiler and #6 Boiler. For these units, stack testing shall be performed no later than December 31st, 2025. Subsequent stack testing shall be conducted at least once every three (3) years from the date of the last stack test. Stack testing shall be performed as outlined in IX.H.11.e.

- iii. Initial compliance testing for FCC Heater H-101, Reformer Heater H-621, Reformer Heater H-622, and Reformer Heater H-624 is required. The initial test shall be performed no later than December 31st, 2025. After the initial compliance test, stack testing shall be performed at least once every three (3) years from the date of the last stack test. Stack testing shall be performed as outlined in IX.H.11.e.

- iv. ~~[Emergency and Standby Equipment~~

- 1  
2 A. ~~The use of diesel fuel meeting the specifications of 40 CFR 80.510 is allowed~~  
3 ~~in standby or emergency equipment at all times.]~~  
4 iv. Alternate Startup and Shutdown Requirements  
5  
6 A. During any day which includes startup or shutdown of the FCCU, combined  
7 emissions of SO<sub>2</sub> shall not exceed 1.2 tons per day (tpd). For purposes of  
8 this subsection, a "day" is defined as a period of 24-hours commencing at midnight  
9 and ending at the following midnight.  
10  
11 B. The total number of days which include startup or shutdown of the  
12 FCCU shall not exceed ten (10) per 12-month rolling period.  
13  
14 v. No later than January 1, 2019, the owner/operator shall install the following  
15 to control emissions from the listed equipment:  
16

<b>Emission Unit</b>	<b>Control Equipment</b>
FCCU Regenerator	Flue gas blowback "Pall Filter", quaternary cyclones with fabric filter
H-404 #1 Crude Heater	Ultra-low NO <sub>x</sub> burners
Refinery Flares	Subpart Ja, and MACT CC flaring standards
SRU	Tail gas incinerator and redundant caustic scrubber
Product Loading Racks	Vapor recovery and vapor combustors
Wastewater Treatment System	API separator fixed cover, carbon adsorber canisters to be installed 2019.

17  
18 c. Chemical Lime Company (LHoist North America)

19  
20 Lime Production Kiln

- 21  
22 i. No later than January 1, 2019, or upon source start-up, whichever comes later,  
23 SNCR technology shall be installed on the Lime Production Kiln.  
24  
25 a. Effective January 1, 2019, or upon source start-up, whichever comes later,  
26 NO<sub>x</sub> emissions shall not exceed 56 lb/hr. (3-hr rolling average)  
27  
28 b. Compliance with the above emissions limit shall be determined by stack  
29 testing as outlined in Section IX Part H.11.e of this SIP.  
30  
31 ii. No later than January 1, 2019, or upon source start-up, whichever comes later, a  
32 baghouse control technology shall be installed and operating on the Lime Production  
33 Kiln.  
34  
35 a. Effective January 1, 2019, or upon source start-up, whichever comes later, PM  
36 emissions shall not exceed 0.12 pounds per ton (lb/ton) of stone feed. (3-hr  
37 rolling average)  
38  
39 b. Effective January 1, 2019, or upon source start-up, whichever comes later, PM<sub>2.5</sub>  
40 (filterable + condensable) emissions shall not exceed 1.5 lbs/ton of stone feed. (3-

1 hr rolling average)

2  
3 c Compliance with the above emission limits shall be determined by stack testing as  
4 outlined in Section IX Part H.11.e of this SIP and in accordance with 40 CFR  
5 63 Subpart AAAAA.

6  
7 iii. An initial compliance test is required no later than January 1, 2019 (if start-up occurs  
8 on or before January 1, 2019) or within 180 days of source start-up (if start-up  
9 occurs after January 1, 2019) All subsequent compliance testing  
10 shall be performed at least once annually based upon the date of  
11 the last compliance test.

12  
13 iv. Upon plant start-up kiln emissions shall be exhausted through the baghouse during all  
14 startup, shutdown, and operations of the kiln.

15  
16 v. Start-up/shut-down provisions for SNCR technology be as follows:

17  
18 a. No ammonia or urea injection during startup until the combustion gases exiting  
19 the kiln reach the temperature when NOx reduction is effective, and

20  
21 b. No ammonia or urea injection during shutdown.

22  
23 c. Records of ammonia or urea injection shall be documented in an operations log.  
24 The operations log shall include all periods of start-up/shut-down and subsequent  
25 beginning and ending times of ammonia or urea injection which documents v.a  
26 and v.b above.

27  
28 d. Chevron Products Company - Salt Lake Refinery

29  
30 i. ~~[Source-wide PM2.5 Cap~~

31  
32 ~~No later than January 1, 2019, combined emissions of PM2.5-~~  
33 ~~(filterable+condensable) shall not exceed 0.305 tons per day (tpd) and 110 tons per~~  
34 ~~rolling 12 month period.~~

35  
36 ~~A. Setting of emission factors:~~

37 ~~The emission factors derived from the most current performance test shall be~~  
38 ~~applied to the relevant quantities of fuel combusted. Unless adjusted by~~  
39 ~~performance testing as discussed in IX.H.12.f.i.B below, the default emission~~  
40 ~~factors to be used are as follows:~~

41  
42 ~~Natural gas:~~

43 ~~Filterable PM2.5: 1.9 lb/MMscf~~

44 ~~Condensable PM2.5: 5.7 lb/MMscf~~

45  
46 ~~Plant gas:~~

47 ~~Filterable PM2.5: 1.9 lb/MMscf~~

48 ~~Condensable PM2.5: 5.7 lb/MMscf~~  
49

1 HF alkylation polymer: shall be determined from the latest edition of AP-42-  
2 (HF alkylation polymer treated as fuel oil #6) or other EPA approved  
3 methods.

4 Diesel fuel: shall be determined from the latest edition of AP-42 or other  
5 EPA approved methods.  
6

7 ~~FCC Stack:~~

8 The PM<sub>2.5</sub> emission factors shall be based on the most recent stack test and  
9 verified by parametric monitoring as outlined in IX.H.11.g.i.B.III

10  
11 Where mixtures of fuel are used in a Unit, the above factors shall be  
12 weighted according to the use of each fuel.  
13

14 ~~B.—The default emission factors listed in IX.H.12.f.i.A above apply until such time~~  
15 ~~as stack testing is conducted as provided in IX.H.11.e or as outlined below:~~  
16

17 Initial PM<sub>2.5</sub> stack testing on the FCC stack has been performed and shall  
18 be conducted at least once every three (3) years from the date of the last  
19 stack test. Stack testing shall be performed as outlined in IX.H.11.e.  
20

21 ~~C.—Compliance with the source wide PM<sub>2.5</sub> Cap shall be determined for each day~~  
22 ~~as follows:~~  
23

24 Total 24-hour PM<sub>2.5</sub> emissions for the emission points shall be calculated by  
25 adding the daily results of the PM<sub>2.5</sub> emissions equations listed below for natural  
26 gas, plant gas, and fuel oil combustion. These emissions shall be added to the  
27 emissions from the FCC to arrive at a combined daily PM<sub>2.5</sub> emission total.  
28

29 For purposes of this subsection a "day" is defined as a period of 24 hours  
30 commencing at midnight and ending at the following midnight.  
31

32 Daily natural gas and plant gas consumption shall be determined through the use of  
33 flow meters.  
34

35 Daily fuel oil consumption shall be monitored by means of leveling gauges on all  
36 tanks that supply combustion sources.  
37

38 The equation used to determine emissions for the boilers and furnaces shall be as  
39 follows: Emissions = Emission Factor (lb/MMscf) \* Gas Consumption (MMscf/24  
40 hrs)/(2,000 lb/ton)  
41

42 Results shall be tabulated for each day, and records shall be kept which include the  
43 meter readings (in the appropriate units) and the calculated emissions.  
44

45 ii.—Source wide NO<sub>x</sub> Cap  
46

47 No later than January 1, 2019, combined emissions of NO<sub>x</sub> shall not exceed 2.1 tons  
48 per day (tpd) and 766.5 tons per rolling 12-month period.  
49

1 A.—Setting of emission factors:  
2

3 The emission factors derived from the most current performance test shall be  
4 applied to the relevant quantities of fuel combusted. Unless adjusted by  
5 performance testing as discussed in IX.H.12.f.ii.B below, the default emission  
6 factors to be used are as follows:  
7

8 Natural gas: shall be determined from the latest edition of AP-42 or other  
9 EPA-approved methods.

10  
11 Plant gas: assumed equal to natural gas  
12

13 Alkylation polymer: shall be determined from the latest edition of AP-42 (as  
14 fuel oil #6) or other EPA-approved methods.  
15

16 Diesel fuel: shall be determined from the latest edition of AP-42 or other  
17 EPA-approved methods.  
18

19 Where mixtures of fuel are used in a Unit, the above factors shall be weighted  
20 according to the use of each fuel.  
21

22 B.—The default emission factors listed in IX.H.12.f.ii.A above apply until such time  
23 as stack testing is conducted as provided in IX.H.11.e or as outlined below:  
24

25 Initial NO<sub>x</sub> stack testing on natural gas/refinery fuel gas combustion equipment  
26 above 100 MMBtu/hr has been performed and shall be conducted at least once  
27 every three (3) years from the date of the last stack test. At that time a new flow-  
28 weighted average emission factor in terms of: lbs/MMBtu shall be derived for  
29 each combustion type listed in IX.H.12.f.ii.A above. Stack testing shall be  
30 performed as outlined in IX.H.11.e.  
31

32 C.—Compliance with the source-wide NO<sub>x</sub> Cap shall be determined for each day  
33 as follows:  
34

35 Total 24-hour NO<sub>x</sub> emissions shall be calculated by adding the emissions for  
36 each emitting unit. The emissions for each emitting unit shall be calculated  
37 by multiplying the hours of operation of a unit, feed rate to a unit, or quantity  
38 of each fuel combusted at each affected unit by the associated emission  
39 factor, and summing the results.  
40

41 A NO<sub>x</sub> CEM shall be used to calculate daily NO<sub>x</sub> emissions from the FCC.  
42 Emissions shall be determined by multiplying the nitrogen dioxide concentration in  
43 the flue gas by the flow rate of the flue gas. The NO<sub>x</sub> concentration in the flue gas  
44 shall be determined by a CEM as outlined in IX.H.11.f.  
45

46 For purposes of this subsection a "day" is defined as a period of 24 hours  
47 commencing at midnight and ending at the following midnight.  
48

49 Daily natural gas and plant gas consumption shall be determined through the use of

1 flow meters.

2  
3 Daily fuel oil consumption shall be monitored by means of leveling gauges on all  
4 tanks that supply combustion sources.

5  
6 Results shall be tabulated for each day, and records shall be kept which include the  
7 meter readings (in the appropriate units) and the calculated emissions

8  
9 ~~iii. Source-wide SO<sub>2</sub>~~

10  
11 No later than January 1, 2019, combined emissions of SO<sub>2</sub> shall not exceed 1.05  
12 tons per day (tpd) and 383.3 tons per rolling 12-month period.

13  
14 ~~A. Setting of emission factors:~~

15 The emission factors derived from the most current performance test shall be applied  
16 to the relevant quantities of fuel combusted. The default emission factors to be used  
17 are as follows:

18  
19 FCC: The emission rate shall be determined by the FCC SO<sub>2</sub> CEM as outlined  
20 in IX.H.11.f.

21  
22 SRUs: The emission rate shall be determined by multiplying the sulfur dioxide  
23 concentration in the flue gas by the flow rate of the flue gas. The sulfur dioxide  
24 concentration in the flue gas shall be determined by CEM as outlined in  
25 IX.H.11.f.

26  
27 Natural gas:  $EF = 0.60 \text{ lb/MMscf}$

28  
29 Fuel oil & HF Alkylation polymer: The emission factor to be used for combustion  
30 shall be calculated based on the weight percent of sulfur, as determined by ASTM  
31 Method D 4294-89 or EPA approved equivalent acceptable to the Director, and the  
32 density of the fuel oil, as follows:

33  
34  $EF (\text{lb SO}_2/\text{k gal}) = \text{density} (\text{lb/gal}) * (1000 \text{ gal/k gal}) * \text{wt. \% S}/100 * (64 \text{ lb}$   
35  $\text{SO}_2/32 \text{ lb S})$

36  
37 Plant gas: the emission factor shall be calculated from the H<sub>2</sub>S measurement  
38 obtained from the H<sub>2</sub>S CEM.

39  
40 Where mixtures of fuel are used in a Unit, the above factors shall be  
41 weighted according to the use of each fuel.

42  
43 ~~B. Compliance with the source-wide SO<sub>2</sub> Cap shall be determined for each day~~  
44 ~~as follows: Total daily SO<sub>2</sub> emissions shall be calculated by adding the daily~~  
45 ~~SO<sub>2</sub>~~

emissions for natural gas and plant fuel gas combustion, to those from the FCC- and SRU stacks.

Daily natural gas and plant gas consumption shall be determined through the use of flow meters.

Daily fuel oil consumption shall be monitored by means of leveling gauges on all tanks that supply combustion sources.

Results shall be tabulated for each day, and records shall be kept which include CEM readings for H<sub>2</sub>S (averaged for each one-hour period), all meter reading (in the appropriate units), fuel oil parameters (density and wt% sulfur for each day any fuel oil is burned), and the calculated emissions.]

- i. NO<sub>x</sub> Emissions to the atmosphere from the indicated emission points shall not exceed the following rates and concentrations. The averaging period for the following emission limits is determined on a 30-day rolling average.

<u>Emission Points</u>	<u>Emission Rate (lb/MMBtu)</u>
<u>1. F-11005 Boiler #5</u>	<u>0.20 lb/MMBtu</u>
<u>2. F-11006 Boiler #6</u>	<u>0.20 lb/MMBtu</u>
<u>3. F-11007 Boiler #7</u>	<u>0.20 lb/MMBtu</u>
<u>4. F-21001 Crude Furnace #1</u>	<u>0.09 lb/MMBtu</u>
<u>5. F-21002 Crude Furnace #2</u>	<u>0.09 lb/MMBtu</u>
<u>6. F-32021 FCC Furnace #1</u>	<u>0.17 lb/MMBtu</u>
<u>7. F-32023 FCC Furnace #2</u>	<u>0.17 lb/MMBtu</u>
<u>8. F-35001 Reformer Furnace F-1</u>	<u>0.17 lb/MMBtu</u>
<u>9. F-35002 Reformer Furnace F-2</u>	<u>0.17 lb/MMBtu</u>
<u>10. F-36017 Alkylation Furnace</u>	<u>0.12 lb/MMBtu</u>
<u>11. F-70001 Coker Furnace</u>	<u>0.16 lb/MMBtu</u>
<u>12. F-66100 VGO Furnace #1</u>	<u>0.05 lb/MMBtu</u>
<u>13. F-66200 VGO Furnace #2</u>	<u>0.05 lb/MMBtu</u>

- ii. Initial NO<sub>x</sub> stack testing has been performed for the following units: F-11005 Boiler #5, F-11006 Boiler #6, F-21001 Crude Furnace #1, F-21002 Crude Furnace #2, F-36017 Alkylation Furnace, and F-70001 Coker Furnace. For these units, stack testing shall be conducted at least once every three (3) years from the date of the last stack test. Stack testing shall be performed as outlined in IX.H.11.e.

- iii. For F-11007 Boiler #7, NO<sub>x</sub> emissions shall be monitored by CEMs to determine

1 compliance. The CEM shall operate as outlined in IX.H.11.f.

2  
3 iv. Initial compliance testing for F-32021 FCC Furnace #1, F-32023 FCC Furnace #2, F-66100  
4 VGO Furnace #1, and F-66200 VGO Furnace #2 is required. The initial test shall be  
5 performed no later than December 31st, 2025. After the initial compliance test, stack  
6 testing shall be performed at least once every three (3) years from the date of the last  
7 stack test. Stack testing shall be performed as outlined in IX.H.11.e.

8  
9 v. A stack testing port shall be installed for F-35001 Reformer Furnace F-1 and F-35002  
10 Reformer Furnace F-2 and initial compliance testing shall be performed no later than  
11 December 31st, 2027. Stack testing shall be performed as outlined in IX.H.11.e.

12  
13 vi. Emergency and Standby Equipment and Alternative Fuels

14  
15 A. ~~[The use of diesel fuel meeting the specifications of 40 CFR 80.510 is~~  
16 ~~allowed in standby or emergency equipment at all times.~~

17  
18 B. ~~HF alkylation polymer may be burned in the Alky Furnace (F-36017).]~~

19  
20 A. Plant coke may be burned in the FCC Catalyst Regenerator.

21  
22 vii. Compressor Engine Requirements

23  
24 A. Emissions of NO<sub>x</sub> from each rich-burn compressor engine shall not exceed  
25 the following:

26

Engine Number	NO <sub>x</sub> in ppmvd @ 0% O <sub>2</sub>
K35001	236
K35002	208
K35003	230

27 B. Initial stack testing to demonstrate compliance with the above emission limitations  
28 shall be performed no later than January 1, 2019 and at least once every three years  
29 thereafter. Stack testing shall be performed as outlined in IX.H.11.e.

30  
31 viii. ~~[Flare Calculation~~

32  
33 A. ~~Chevron's Flare #3 receives gases from its Isomerization unit, Reformer unit as~~  
34 ~~well as its HF Alkylation Unit. The HF Alkylation Unit's flow contribution to Flare #3~~  
35 ~~will not be included in determining compliance with the flow restrictions set in~~  
36 ~~IX.H.11.g.v.B]~~

- ix. No later than January 1, 2019, the owner/operator shall install the following to control emissions from the listed equipment:

<b>Emission Unit</b>	<b>Control Equipment</b>
Boilers: 5, 6, 7	Low NOx burners and flue gas recirculation (FGR)
Cooling Water Towers	High efficiency drift eliminators
Crude Furnaces F21001, F21002	Low NOx burners
Crude Oil Loading	Vapor Combustion Unit (VCU)
FCC Regenerator Stack	Vacuum gas oil hydrotreater, Electrostatic precipitator (ESP) and cyclones
Flares: Flare 1, 2	Flare gas recovery system
HDS Furnaces F64010, F64011	Low NOx burners
Reformer Compressor Drivers K35001, K35002, K35003	Selective Catalytic Reduction (SCR)
Sulfur Recovery Unit 1	Tail gas treatment unit and tail gas incineration
Sulfur Recovery Unit 2	Tail gas treatment unit and tail gas incineration
Wastewater Treatment Plant	Existing wastewater controls system of induced air flotation (IAF) and regenerative thermal oxidation (RTO). <u>Upon completion of startup and initial commissioning, the Dissolved Nitrogen Flootation (DNF) process is allowed instead of the IAF system.</u>

e. Compass Minerals Ogden Inc.

- i. NOx emissions to the atmosphere from the indicated emission point shall not exceed the following concentrations:

Emission Points	Concentration (ppm)	lb/hr
Boiler #1	9.0	1.3
Boiler #2	9.0	1.3

Compliance to the above emission limits shall be determined by stack test as outlined in Section IX Part H.11.e of this SIP. A compliance test shall be performed at least annually subsequent to the initial compliance test.

- ii. PM2.5 emissions (filterable+condensable) to the atmosphere from each of the following emission points shall not exceed the listed concentration and lb/hr emission rates:

Emission Unit	PM2.5 Emission Rate (lb/hr)	Concentration Emission Rate (grains/dscf)
AH-500	1.61	0.01
AH-502	0.74	0.04
AH-513	1.49	0.0114
BH-001	0.37	0.01
BH-002	0.47	0.01
BH-008	4.25	0.01

BH-501	1.15	0.01
BH-502	0.06	0.0053
BH-503	0.23	0.01
BH-505	0.12	0.01
AH-1555	0.39	0.01
BH-1400	2.78	0.02
AH-692	0.12	0.01
BH-1516	0.22	0.01

1  
2 A. Compliance to the above emission limits shall be determined by stack test as outlined  
3 in Section IX Part H.11.e of this SIP. Compliance testing shall be performed  
4 annually.

5  
6 B. Process emissions shall be routed through operating controls prior to being emitted to  
7 the atmosphere.

8  
9 iii. Emissions of VOC from all Magnesium Chloride Evaporators (four stacks total)  
10 shall not exceed 6.18 lb/hr.

11 A. Compliance shall be determined by stack test as outlined in Section IX Part H.11.e  
12 of this SIP. Compliance testing shall be performed at least once every three years.

13 B. Process emissions shall be routed through operating controls prior to being emitted to  
14 the atmosphere.

15  
16  
17  
18 f. Hexcel Corporation: Salt Lake Operations

19 i. The following limits shall not be exceeded for fiber line  
20 operations:

21 A. 5.50 MMscf of natural gas consumed per day.

22 B. 0.061 MM pounds of carbon fiber produced per day.

23 C. Compliance with each limit shall be determined by the following methods:

24 I. Natural gas consumption shall be determined by examination of natural  
25 gas billing records for the plant and onsite pipe-line metering.

26 II. Fiber production shall be determined by examination of plant production records.

27 III. Records of consumption and production shall be kept on a daily basis for all  
28 periods when the plant is in operation.

29 ii. After a shutdown and prior to startup of fiber lines 13 to 16, the line's  
30 baghouse(s) and natural gas injection dual chambered regenerative thermal  
31 oxidizer shall be started and remain in operation during production.

32 A. During fiber line production, the static pressure differential across the filter media  
33  
34  
35  
36  
37  
38  
39  
40  
41

1 shall be within the manufacturer's recommended range and shall be recorded daily.

2  
3 B. The manometer or the differential pressure gauge shall be calibrated according to the  
4 manufacturer's instructions at least once every 12 months.

5  
6 iii. Filter boxes will be installed on Fiber lines 13 and 14 to control PM2.5 emissions  
7 no later than December 31, 2019.

8  
9 iv. ~~Ultra-Low NO<sub>x</sub> Burners with flue gas recirculation shall be installed on Fiber~~  
10 ~~lines 3, 4, and 7 to control NO<sub>x</sub> emissions no later than December 31,~~  
11 ~~2024.~~

12  
13  
14 ~~A. Emission limitations for NO<sub>x</sub> shall be as follows:~~

15  
16 Concentration \_\_\_\_\_ (ppm)

17  
18 Fiber Line 3 \_\_\_\_\_ 9.0

19  
20 Fiber Line 4 \_\_\_\_\_ 9.0

21  
22 Fiber Line 7 \_\_\_\_\_ 9.0

23  
24 ~~B. Stack testing shall be performed at least once every (3) years based upon the~~  
25 ~~date of the last compliance test and at a time when PAN is not being introduced~~  
26 ~~into the burners.~~

27  
28 ~~v. De-NO<sub>x</sub> Water Direct Fired Thermal Oxidizer (DFTO) shall be installed on Fiber~~  
29 ~~lines 13, 14, 15, and 16 to control NO<sub>x</sub> emissions no later than December 31,~~  
30 ~~2024.]~~

31  
32 iv. After a shutdown and prior to startup of the fiber lines, the residence time and  
33 temperature associated with the regenerative thermal-oxidation fume incinerators  
34 and solvent-coating fume incinerators shall be started and remain in operation during  
35 production.

36  
37 A. Unless otherwise indicated, the carbon fiber production thermal-oxidation fume  
38 incinerators the minimum temperature shall be 1,400 deg F and the residence time  
39 shall be greater than or equal to 0.5 seconds

40  
41 Solvent-coating fume incinerators the minimum temperature shall be 1,450 deg  
42 F and the residence time shall be greater than or equal to 0.5 seconds

43  
44 For fiber lines 6, 7, 8, 10, 11, 12, and the line associated with the Research and  
45 Development Facility, the solvent coating fume incinerators temperature shall range  
46 from 1,400 to 1,700 deg F and the residence time shall be greater than or equal to  
47 1.0 second

48  
49 Residence times shall be determined by:

1  
2  $R = V / Q_{max}$

3 Where

4  $R$  = residence time

5  $V$  = interior volume of the incinerator – ft<sup>3</sup>

6  $Q_{max}$  = maximum exhaust gas flow rate – ft<sup>3</sup>/second  
7

- 8 B. Incinerator temperatures shall be monitored with temperature sensing equipment  
9 that is capable of continuous measurement and readout of the combustion  
10 temperature. The readout shall be located such that an inspector/operator can at  
11 any time safely read the output. The measurement shall be accurate within ± 25°F  
12 at operating temperature. The measurement need not be continuously recorded.  
13 All instruments shall be calibrated against a primary standard at least once every  
14 180 days. The calibration procedure shall be in accordance with 40 CFR 60,  
15 Appendix A, Method 2, paragraph 6.3, and 10.31, or use a type "K"  
16 thermocouple.  
17

18 g. Holly Frontier Sinclair Refinery [Corporation: Holly Refining & Marketing  
19 Company (Holly Refinery)]  
20

21 i. ~~[Source-wide PM<sub>2.5</sub> Cap~~

22  
23 ~~No later than January 1, 2019, PM<sub>2.5</sub> emissions (filterable + condensable) from~~  
24 ~~all combustion sources shall not exceed 47.6 tons per rolling 12-month period and~~  
25 ~~0.134 tons per day (tpd).~~  
26

27 ~~A. Setting of emission factors:~~

28 ~~The emission factors derived from the most current performance test shall be~~  
29 ~~applied to the relevant quantities of fuel combusted. Unless adjusted by~~  
30 ~~performance testing as discussed in IX.H.12. g.i.B below, the default~~  
31 ~~emission factors to be used are as follows:~~  
32

33 ~~Natural gas or Plant gas:~~

34 ~~non-NSPS combustion equipment: 7.65 lb-~~

35 ~~PM<sub>2.5</sub>/MMscf NSPS combustion equipment: 0.52 lb-~~

36 ~~PM<sub>2.5</sub>/MMscf~~  
37

38 ~~Fuel oil:~~

39 ~~The filterable PM<sub>2.5</sub> emission factor for fuel oil combustion shall be determined~~  
40 ~~based on the sulfur content of the oil as follows:~~  
41

42  ~~$PM_{2.5} \text{ (lb/1000 gal)} = (10 * \text{wt. \% S}) + 3$~~   
43

44 ~~The condensable PM<sub>2.5</sub> emission factor for fuel oil combustion shall be determined~~  
45 ~~from the latest edition of AP-42.~~  
46

47 ~~FCC Wet Scrubbers:~~

48 ~~The PM<sub>2.5</sub> emission factors shall be based on the most recent stack test~~  
49 ~~and verified by parametric monitoring as outlined in IX.H.11.g.i.B.III.~~

1 As an alternative to a continuous parameter monitor system or continuous  
2 opacity monitoring system for PM emissions from any FCCU controlled by a  
3 wet gas scrubber, as required in Subsection IX.H.11.g.i.B.III, the  
4 owner/operator may satisfy the opacity monitoring requirements from its  
5 FCC Units with wet gas scrubbers through an alternate monitoring program as  
6 approved by the EPA and acceptable to the Director.  
7

8 ~~B.—The default emission factors listed in IX.H.12. g.i.A above apply until such~~  
9 ~~time as stack testing is conducted as outlined below:~~

10  
11 Initial stack testing on all NSPS combustion equipment shall be conducted no  
12 later than January 1, 2019 and at least once every three years thereafter. At that  
13 time a new flow weighted average emission factor in terms of: lb  
14 PM<sub>2.5</sub>/MMBtu shall be derived. Stack testing shall be performed as outlined in  
15 IX.H.11.e.

16 ~~C.—Compliance with the source wide PM<sub>2.5</sub> Cap shall be determined for each day~~  
17 ~~as follows: Total 24-hour PM<sub>2.5</sub> emissions for the emission points shall be~~  
18 ~~calculated by adding the daily results of the PM<sub>2.5</sub> emissions equations listed~~  
19 ~~below for natural gas, plant gas, and fuel oil combustion. These emissions shall~~  
20 ~~be added to the emissions from the wet scrubbers to arrive at a combined daily~~  
21 ~~PM<sub>2.5</sub> emission total.~~

22  
23 For purposes of this subsection a "day" is defined as a period of 24 hours  
24 commencing at midnight and ending at the following midnight.

25  
26 Daily natural gas and plant gas consumption shall be determined through the use of  
27 flow meters on all gas-fueled combustion equipment.

28  
29 Daily fuel oil consumption shall be monitored by means of leveling gauges on all  
30 tanks that supply fuel oil to combustion sources.

31  
32 The equations used to determine emissions for the boilers and furnaces shall be as  
33 follows:

34  
35 Emissions (tons/day) = Emission Factor (lb/MMscf) \* Natural/Plant  
36 Gas Consumption  
37 (MMscf/day)/(2,000 lb/ton)

38  
39 Emissions (tons/day) = Emission Factor (lb/kgal) \* Fuel Oil  
40 Consumption (kgal/day)/(2,000 lb/ton)

41  
42 Results shall be tabulated for each day, and records shall be kept which include all  
43 meter readings (in the appropriate units), and the calculated emissions.  
44

45 ii.—Source wide NO<sub>x</sub> Cap

46  
47 No later than January 1, 2019, NO<sub>x</sub> emissions into the atmosphere from all  
48 emission points shall not exceed 347.1 tons per rolling 12-month period and 2.09 tons  
49 per day (tpd).

1  
2 A. ~~Setting of emission factors:~~

3 The emission factors derived from the most current performance test shall be  
4 applied to the relevant quantities of fuel combusted.

5  
6 Unless adjusted by performance testing as discussed in IX.H.12. g.ii.B below,  
7 the default emission factors to be used are as follows:

8  
9 Natural gas/refinery fuel gas combustion using:

10 Low NO<sub>x</sub> burners (LNB): 41 lbs/MMscf

11 Ultra Low NO<sub>x</sub> (ULNB) burners: 0.04 lbs/MMbtu

12 Next Generation Ultra Low NO<sub>x</sub> burners (NGULNB): 0.10 lbs/MMbtu

13 Boiler #5: 0.02 lbs/MMbtu

14 All other boilers with selective catalytic reduction (SCR): 0.02

15 lbs/MMbtu All other combustion burners: 100 lb/MMscf

16  
17 Where:

18 "Natural gas/refinery fuel gas" shall represent any combustion of natural  
19 gas, refinery fuel gas, or combination of the two in the associated  
20 burner.

21  
22 All fuel oil combustion: 120 lbs/Kgal

23  
24 B. ~~The default emission factors listed in IX.H.12. g.ii.A above apply until such time~~  
25 ~~as stack testing is conducted as outlined in IX.H.11.e or by NSPS.~~

26  
27 C. ~~Compliance with the Source wide NO<sub>x</sub> Cap shall be determined for each day~~  
28 ~~as follows: Total daily NO<sub>x</sub> emissions for emission points shall be~~  
29 ~~calculated by adding the results of the NO<sub>x</sub> equations for plant gas, fuel oil,~~  
30 ~~and natural gas~~  
31 ~~combustion listed below. For purposes of this subsection a "day" is defined as a~~  
32 ~~period of 24 hours commencing at midnight and ending at the following~~  
33 ~~midnight.~~

34  
35 Daily natural gas and plant gas consumption shall be determined through the use of  
36 flow meters.

37  
38 Daily fuel oil consumption shall be monitored by means of leveling gauges on all  
39 tanks that supply combustion sources.

40  
41 The equations used to determine emissions for the boilers and furnaces shall  
42 be as follows:

43  
44 Emissions (tons/day) = Emission Factor (lb/MMscf) \* Natural Gas  
45 Consumption (MMscf/day)/(2,000 lb/ton)

46  
47 Emissions (tons/day) = Emission Factor (lb/MMscf) \* Plant Gas Consumption  
48 (MMscf/day)/(2,000 lb/ton)

1 Emissions (tons/day) = Emission Factor (lb/MMBTU) \* Burner Heat Rating  
2 (BTU/hr)\*  
3 24 hours per day / (2,000 lb/ton)  
4

5 Emissions (tons/day) = Emission Factor (lb/kgal) \* Fuel Oil  
6 Consumption (kgal/day) / (2,000 lb/ton)  
7

8 Results shall be tabulated for each day; and records shall be kept which include the  
9 meter readings (in the appropriate units), emission factors, and the calculated  
10 emissions.  
11

12 ~~iii. Source-wide SO<sub>2</sub> Cap~~

13 ~~No later than January 1, 2019, the emission of SO<sub>2</sub> from all emission points~~  
14 ~~(excluding routine SRU turnaround maintenance emissions) shall not exceed 110.3~~  
15 ~~tons per rolling 12 month period and 0.31 tons per day (tpd).~~  
16

17 ~~A. Setting of emission factors:~~

18 ~~The emission factors listed below shall be applied to the relevant quantities~~  
19 ~~of fuel combusted:~~  
20

21 ~~Natural gas — 0.60 lb SO<sub>2</sub>/MMscf~~  
22

23 ~~Plant gas — The emission factor to be used in conjunction with plant gas~~  
24 ~~combustion shall be determined through the use of a CEM which will measure the~~  
25 ~~H<sub>2</sub>S content of the fuel gas. The CEM shall operate as outlined in~~  
26 ~~IX.H.11.f.~~  
27

28 ~~Fuel oil — The emission factor to be used in conjunction with fuel oil combustion~~  
29 ~~shall be calculated based on the weight percent of sulfur, as determined by ASTM~~  
30 ~~Method D-4294-89 or EPA approved equivalent, and the density of the fuel oil,~~  
31 ~~as follows:~~  
32

33 ~~(lb of SO<sub>2</sub>/kgal) = (density lb/gal) \* (1000 gal/kgal) \* (wt. %S)/100 \* (64 g~~  
34 ~~SO<sub>2</sub>/32 g S)~~  
35

36 ~~The weight percent sulfur and the fuel oil density shall be recorded for each day~~  
37 ~~any fuel oil is combusted.~~  
38

39 ~~B. Compliance with the Source-wide SO<sub>2</sub> Cap shall be determined for each day as~~  
40 ~~follows: Total daily SO<sub>2</sub> emissions shall be calculated by adding daily results~~  
41 ~~of the SO<sub>2</sub> emissions~~

42 ~~equations listed below for natural gas, plant gas, and fuel oil combustion.~~

43 ~~For purposes~~

44 ~~of this subsection a "day" is defined as a period of 24 hours commencing~~  
45 ~~at midnight and ending at the following midnight.~~  
46

47 ~~The equations used to determine emissions are:~~  
48

49 ~~Emissions (tons/day) = Emission Factor (lb/MMscf) \* Natural Gas~~

Consumption (MMscf/day)/(2,000 lb/ton)

Emissions (tons/day) = Emission Factor (lb/MMscf) \* Plant Gas Consumption (MMscf/day)/(2,000 lb/ton)

Emissions (tons/day) = Emission Factor (lb/kgal) \* Fuel Oil Consumption (kgal/24 hrs)/(2,000 lb/ton)

For purposes of these equations, fuel consumption shall be measured as outlined below: Daily natural gas and plant gas consumption shall be determined through the use of flow meters.

Daily fuel oil consumption shall be monitored by means of leveling gauges on all tanks that supply combustion sources.

Results shall be tabulated for each day, and records shall be kept which include CEM readings for H<sub>2</sub>S (averaged for each one-hour period), all meter reading (in the appropriate units), fuel oil parameters (density and wt% sulfur for each day any fuel oil is burned), and the calculated emissions.]

- i. NO<sub>x</sub> Emissions to the atmosphere from the indicated emission points shall not exceed the following rates and concentrations. The averaging period for the following emission limits is determined on a 30-day rolling average.

<u>Emission Points</u>	<u>Emission Rate (lb/MMBtu)</u>
<u>1. Reformer Reheat Furnace 6H1</u>	<u>0.15 lb/MMBtu</u>
<u>2. Crude Furnace #1 8H2</u>	<u>0.04 lb/MMBtu</u>
<u>3. NHDS Reactor Charge Furnace 12H1</u>	<u>0.10 lb/MMBtu</u>
<u>4. Fractionator Charge Heater 20H2</u>	<u>0.04 lb/MMBtu</u>
<u>5. Boiler #5</u>	<u>0.02 lb/MMBtu</u>
<u>6. Boiler #8</u>	<u>0.02 lb/MMBtu</u>
<u>7. Boiler #9</u>	<u>0.02 lb/MMBtu</u>
<u>8. Boiler #10</u>	<u>0.02 lb/MMBtu</u>
<u>9. Boiler #11</u>	<u>0.02 lb/MMBtu</u>

- ii. A stack testing port shall be installed for Reformer Reheat Furnace 6H1 and initial compliance testing shall be performed no later than December 31<sup>st</sup>, 2028. Stack testing shall be performed as outlined in IX.H.11.e.
- iii. Initial NO<sub>x</sub> stack testing has been performed for the following units: Crude Furnace #1 8H2, NHDS Reactor Charge Furnace 12H1, Boiler #5, Boiler #8, Boiler #9, Boiler #10,

1 and Boiler #11. For these units, stack testing shall be conducted at least once every  
 2 three (3) years from the date of the last stack test. Stack testing shall be performed as  
 3 outlined in IX.H.11.e.

4  
 5 iv. Initial compliance testing for the Fractionator Charge Heater 20H2 is required. The  
 6 initial test shall be performed no later than December 31st, 2025. After the initial  
 7 compliance test, stack testing shall be performed at least once every three (3) years  
 8 from the date of the last stack test. Stack testing shall be performed as outlined in  
 9 IX.H.11.e.

10  
 11 v. ~~[Emergency and Standby Equipment~~

12  
 13 ~~A. The use of diesel fuel meeting the specifications of 40 CFR 80.510 is allowed in~~  
 14 ~~standby or emergency equipment at all times.]~~

15  
 16 v. No later than January 1, 2019, the owner/operator shall install the following to  
 17 control emissions from the listed equipment:  
 18

Emission Unit	Control Equipment
Process heaters and boilers	Boilers 8&11: LNB+SCR Boilers 5, 9 & 10: SCR Process heaters 20H2, 20H3, [23H1], 24H1, 25H1: ULNB
Cooling watertowers 10, 11	High efficiency drift eliminators
FCCU regenerator stacks	WGS with Lo-TOx
Flares	Flare gas recovery system
Sulfur recovery unit	Tail gas incineration and WGS with Lo-TOx
Wastewater treatment plant	API separators, dissolved gas floatation (DGF), moving bed bio-film reactors (MBBR)

19  
 20 h. Kennecott Utah Copper (KUC): Mine

21  
 22 i. Bingham Canyon Mine (BCM)

23  
 24 A. Maximum total mileage per calendar day for diesel-powered ore and waste haul  
 25 trucks shall not exceed 30,000 miles.

26  
 27 KUC shall keep records of daily total mileage for all periods when the mine is in  
 28 operation. KUC shall track haul truck miles with a Global Positioning System or  
 29 equivalent. The system shall use real time tracking to determine daily mileage.

30  
 31 B. To minimize fugitive dust on roads at the mine, the owner/operator shall perform  
 32 the following measures:

33  
 34 I. Apply water to all active haul roads as weather and operational conditions  
 35 warrant except during precipitation or freezing weather conditions, and shall

1 apply a chemical dust suppressant to active haul roads located outside of the pit  
2 influence boundary no less than twice per year.

3  
4 II. Chemical dust suppressant shall be applied as weather and operational  
5 conditions warrant except during precipitation or freezing weather conditions on  
6 unpaved access roads that receive haul truck traffic and light vehicle traffic.  
7

8 III. Records of water and/or chemical dust control treatment shall be kept for  
9 all periods when the BCM is in operation.

10  
11 IV. KUC is subject to the requirements in the most recent federally approved  
12 Fugitive Emissions and Fugitive Dust rules.  
13

14 C. The In-pit crusher baghouse shall not exceed a PM2.5 emission limit of  
15 0.78 lbs/hr (0.007 gr/dscf) PM2.5 monitoring shall be performed by stack  
16 testing every three years.  
17

18 ii. Copperton Concentrator (CC)

19  
20 A. Control emissions from the Product Molybdenite Dryers with a scrubber  
21 during operation of the dryers.  
22

23 During operation of the dryers, the static pressure differential between the inlet and  
24 outlet of the scrubber shall be within the manufacturer's recommended range and  
25 shall be recorded weekly.  
26

27 The manometer or the differential pressure gauge shall be calibrated according to the  
28 manufacturer's instructions at least once per year.  
29

30 The remaining heaters shall not operate more than 300 hours per rolling 12- month  
31 period unless upgraded so the NOx emission rate is no greater than 30 ppm.  
32

33 i. Kennecott Utah Copper (KUC): Power Plant

34  
35 i. Utah Power Plant

36  
37 A. The following requirements are applicable to Unit #4:  
38

39 I. Only natural gas shall only be used as a fuel, unless the supplier or transporter  
40 of natural gas imposes a curtailment. Unit #4 may then burn coal, only for the  
41 duration of the curtailment plus sufficient time to empty the coal bins following  
42 the curtailment. The Director shall be notified of the curtailment within 48  
43 hours of when it begins and within 48 hours of when it ends.  
44

45 II. Emissions to the atmosphere when burning natural gas shall not exceed the  
46 following rates and concentrations:  
47

Pollutant	grains/dscf	ppmdv	lbs/hr	lbs/MMBtu
68°F. 29.92 in Hg		3% O2		

- 1. PM2.5:
  - Filterable 0.004
  - Filterable + condensable 0.03
- 2. NOx: 30 32 0.04

B. Upon commencement of operation of Unit #4, stack testing to demonstrate compliance with each emission limitation in IX.H.12.j.i.A and IX.H.12.j.i.B shall be performed as follows:

\* Initial compliance testing for the Unit 4 boiler is required. Initial testing shall be performed when burning natural gas. The initial test shall be performed within 60 days after achieving the maximum heat input capacity production rate at which the affected facility will be operated and in no case later than 180 days after the initial startup of a new emission source.

The limited use of natural gas during maintenance firings and break-in firings does not constitute operation and does not require stack testing.

Pollutant	Test Frequency
I. PM2.5	every year
II. NOx	every year

C. Unit #5 (combined cycle, natural gas-fired combustion turbine) shall not exceed the following emission rates to the atmosphere:

Pollutant	lbs/hr	ppmdv (15% O2 dry)
I. PM2.5 with duct firing: Filterable + condensable	18.8	
II. VOC:		2.0
III. NOx:		2.0

D: Upon commencement of operation of Unit #5\*, stack testing to demonstrate compliance with the emission limitations in IX.H.12.m.i.B shall be performed as follows for the following air contaminants

\* Initial compliance testing for the natural gas turbine and duct burner is required. The initial test shall be performed within 60 days after achieving the maximum heat input capacity production rate at which the affected facility will be operated and in no case later than 180 days after the initial startup of a new emission source.

The limited use of natural gas during maintenance firings and break-in firings does not constitute operation and does not require stack testing.

Pollutant	Test Frequency
-----------	----------------

I. PM2.5	every year
----------	------------

II. NOx	every year
---------	------------

III. VOC	every year
----------	------------

j. Kennecott Utah Copper: Smelter and Refinery

i. Smelter:

A. Emissions to the atmosphere from the indicated emission points shall not exceed the following rates and concentrations:

I. Main Stack (Stack No. 11)

1. PM2.5

- a. 85 lbs/hr (filterable)
- b. 434 lbs/hr (filterable + condensable)

2. SO2

- a. 552 lbs/hr (3 hr. rolling average)
- b. 422 lbs/hr (daily average)

3. NOx 154 lbs/hr (daily average)

II. Holman Boiler

1. NOx

- a. 14 lbs/hr, (calendar-day average)

B. Stack testing to show compliance with the emissions limitations of Condition (A) above shall be performed as specified below:

EMISSION POINT	POLLUTANT	TEST FREQUENCY
I. Main Stack (Stack No. 11)	PM2.5	Every Year
	SO2	CEM
	NOx	CEM
II. Holman Boiler	NOx	Every three years and CEMS or alternate method according to applicable NSPS Standards

1 The Holman boiler shall use an EPA approved test method every three years and  
2 in between years use or an approved CEMS or alternate method according to  
3 applicable NSPS standards.  
4

5 C. During startup/shutdown operations, NOx and SO2 emissions are  
6 monitored by CEMS or alternate methods in accordance with applicable  
7 NSPS standards.  
8

9 D. KUC must operate and maintain the air pollution control equipment and  
10 monitoring equipment in a manner consistent with good air pollution control  
11 practices for minimizing emissions at all times including during startup,  
12 shutdown, and malfunction.  
13

14 ii. Refinery:

15  
16 A. Emissions to the atmosphere from the indicated emission point shall not exceed the  
17 following rate:  
18

19	EMISSION POINT	POLLUTANT	MAXIMUM EMISSION RATE
20			
21	The sum of two		
22	(Tankhouse) 27	NOx	9.5 lbs/hr (before December 2020)
23	Boilers		
24			
25	(Upgraded		
26			

1 Tankhouse Boiler) NOx 1.5 lbs/hr (After December 2020)

2  
3 Combined Heat Plant NOx 5.96 lbs/hr

4  
5 B. Stack testing to show compliance with the above emission limitations shall be  
6 performed as follows:  
7

EMISSION POINT	POLLUTANT	TESTING FREQUENCY
Upgraded Tankhouse Boilers	NOx	every three years*
Combined Heat Plant	NOx	every year

8  
9 \*Stack testing shall be performed on boilers that have operated more than 300  
10 hours during a three year period.

11  
12 C. One 82 MMBTU/hr Tankhouse boiler shall be upgraded to meet a NOx rating of  
13 9 ppm no later than December 31, 2020. The remaining Tankhouse boiler shall  
14 not consume more than 100,000 MCF of natural gas per rolling 12- month period  
15 unless upgraded so the NOx emission rate is no greater than 30 ppm

16  
17 D. KUC must operate and maintain the stationary combustion turbine, air pollution  
18 control equipment, and monitoring equipment in a manner consistent with good air  
19 pollution control practices for minimizing emissions at all times including during  
20 startup, shutdown, and malfunction. Records shall be kept on site which indicate the  
21 date and time of startups and shutdowns.  
22

23 k. Nucor Steel Mills

24  
25 i. Emissions to the atmosphere from the indicated emission points shall not exceed the  
26 following rates:

27  
28 A. Electric Arc Furnace Baghouse

29  
30 I. PM2.5

- 31 1. 17.4 lbs/hr (24 hr. average filterable)  
32 2. 29.53 lbs/hr (24 hr. average condensable)

33  
34 II. SO2

- 35 1. 93.98 lbs/hr (3 hr. rolling average)  
36 2. 89.0 lbs/hr (daily average)

37  
38 III. NOx 59.5 lbs/hr (calendar-day average)

39  
40 IV. VOC 22.20 lbs/hr

41  
42 B. Reheat Furnace #1  
43 NOx 15.0 lb/hr  
44

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14

C. Reheat Furnace #2  
NO<sub>x</sub> 8.0 lb/hr

ii. Stack testing to show compliance with the emissions limitations of Condition (i) above shall be performed as outlined in IX.H.11.e and as specified below:

EMISSION POINT	POLLUTANT	TEST FREQUENCY
A. Electric Arc Furnace Baghouse	PM2.5	every year
	<del>SO<sub>2</sub></del>	CEM
	<del>NO<sub>x</sub></del>	CEM
	<del>VOC</del>	every year

- B. Reheat Furnace #1                      NOx                      every year
- C. Reheat Furnace #2                      NOx                      every year

iii. Testing Status (To be applied to (i) and (ii) above)

- A. To demonstrate compliance with the Electric Arc Furnace stack mass emissions limits for SO<sub>2</sub> and NO<sub>x</sub> of Condition (i)(A) above, Nucor shall calibrate, maintain and operate the measurement systems for continuously monitoring for SO<sub>2</sub> and NO<sub>x</sub> concentrations and stack gas volumetric flow rates in the Electric Arc Furnace stack. Such measurement systems shall meet the requirements of R307-170.
- B. For PM<sub>2.5</sub> testing, 40 CFR 60, Appendix A, Method 5D, or another EPA approved method acceptable to the Director, shall be used to determine total TSP emissions. If TSP emissions are below the PM<sub>2.5</sub> limit, that will constitute compliance with the PM<sub>2.5</sub> limit. If TSP emissions are not below the PM<sub>2.5</sub> limit, the owner/operator shall retest using EPA approved methods specified for PM<sub>2.5</sub> testing, within 120 days.
- C. Startup/shutdown NO<sub>x</sub> and SO<sub>2</sub> emissions are monitored by CEMS.

I. PacifiCorp Energy: Gadsby Power Plant

i. Steam Generating Unit #1:

- A. Emissions of NO<sub>x</sub> shall be no greater than 179 lbs/hr on a three (3) hour block average basis.
- B. Emissions of NO<sub>x</sub> shall not exceed 336 ppm<sub>dv</sub> (@ 3% O<sub>2</sub>, dry)
- C. The owner/operator shall install, certify, maintain, operate, and quality-assure a CEM consisting of NO<sub>x</sub> and O<sub>2</sub> monitors to determine compliance with the NO<sub>x</sub> limitation. The CEM shall operate as outlined in IX.H.11.f.

ii. Steam Generating Unit #2:

- A. Emissions of NO<sub>x</sub> shall be no greater than 204 lbs/hr on a three (3) hour block average basis.
- B. Emissions of NO<sub>x</sub> shall not exceed 336 ppm<sub>dv</sub> (@ 3% O<sub>2</sub>, dry)
- C. The owner/operator shall install, certify, maintain, operate, and quality-assure a continuous emission monitoring system (CEMS) consisting of NO<sub>x</sub> and O<sub>2</sub> monitors to determine compliance with the NO<sub>x</sub> limitation.

iii. Steam Generating Unit #3:

- A. Emissions of NO<sub>x</sub> shall be no greater than

- I. 142 lbs/hr on a three (3) hour block average basis, applicable between November 1 and February 28/29.
- II. 203 lbs/hr on a three (3) hour block average basis, applicable between March 1 and October 31.

B. Emissions of NOx shall not exceed

- I. 168 ppmdv (@ 3% O2, dry), applicable between November 1 and February 28/29
- II. 168 ppmdv (@ 3% O2, dry), applicable between applicable between March 1 and October 31.

C. The owner/operator shall install, certify, maintain, operate, and quality-assure a CEM consisting of NOx and O2 monitors to determine compliance with the NOx limitation. The CEM shall operate as outlined in IX.H.11.f.

iv. Steam Generating Units #1-3:

- A. The owner/operator shall use only natural gas as a primary fuel and No. 2 fuel oil or better as back-up fuel in the boilers. The No. 2 fuel oil may be used only during periods of natural gas curtailment and for maintenance firings. Maintenance firings shall not exceed one-percent of the annual plant Btu requirement. In addition, maintenance firings shall be scheduled between April 1 and November 30 of any calendar year. Records of fuel oil use shall be kept and they shall show the date the fuel oil was fired, the duration in hours the fuel oil was fired, the amount of fuel oil consumed during each curtailment, and the reason for each firing.

v. Natural Gas-fired Simple Cycle, Catalytic-controlled Turbine Units:

- A. Total emissions of NOx from all three turbines shall be no greater than 600 lbs/day. For purposes of this subsection a "day" is defined as a period of 24-hours commencing at midnight and ending at the following midnight.
- B. Emissions of NOx from each turbine stack shall not exceed 5 ppmvd (@ 15% O2 dry). Emissions shall be calculated on a 30-day rolling average. This limitation applies to steady state operation, not including startup and shutdown.
- C. The owner/operator shall install, certify, maintain, operate, and quality-assure a CEM consisting of NOx and O2 monitors to determine compliance with the NOx limitation. The CEM shall operate as outlined in IX.H.11.f.

vi. Combustion Turbine Startup / Shutdown Emission Minimization Plan

- A. Startup begins when the fuel valves open and natural gas is supplied to

1 the combustion turbines

2  
3 B. Startup ends when either of the following conditions is met:

4  
5 I. The NOx water injection pump is operational, the dilution air temperature  
6 is greater than 600°F, the stack inlet temperature reaches 570°F, the  
7 ammonia block valve has opened and ammonia is being injected into the SCR  
8 and the unit has reached an output of ten (10) gross MW; or

9  
10 II. The unit has been in startup for two (2) hours.

11  
12 C. Unit shutdown begins when the unit load or output is reduced below ten (10)  
13 gross MW with the intent of removing the unit from service.

14  
15 D. Shutdown ends at the cessation of fuel input to the turbine combustor.

16  
17 E. Periods of startup or shutdown shall not exceed two (2) hours per combustion  
18 turbine per day.

19  
20 F. Turbine output (turbine load) shall be monitored and recorded on an hourly  
21 basis with an electrical meter.

22  
23 m. Tesoro Refining and Marketing Company LLC Marathon Refinery: Salt Lake City  
24 Refinery

25  
26 i. ~~[Source-wide PM2.5 Cap~~

27  
28 ~~No later than January 1, 2019, combined emissions of PM2.5~~  
29 ~~(filterable+condensable) shall not exceed 2.25 tons per day (tpd) and 179 tons per~~  
30 ~~rolling 12-month period.~~

31  
32 ~~A. Setting of emission factors:~~

33  
34 ~~The emission factors derived from the most current performance test shall be~~  
35 ~~applied to the relevant quantities of fuel combusted. Unless adjusted by~~  
36 ~~performance testing as discussed in IX.H.12.p.i.B below, the default emission~~  
37 ~~factors to be used are as follows:~~

38  
39 ~~Natural gas:~~

40 ~~Filterable PM2.5: 0.0019-~~

41 ~~lb/MMBtu Condensable PM2.5:-~~

42 ~~0.0056 lb/MMBtu~~

43  
44 ~~Plant gas:~~

45 ~~Filterable PM2.5: 0.0019-~~

46 ~~lb/MMBtu Condensable PM2.5:-~~

47 ~~0.0056 lb/MMBtu~~

48  
49 ~~Fuel Oil: The PM2.5 emission factor shall be determined from the latest edition~~

1 of AP-42 or other EPA approved methods.

2  
3 **FCC Wet Scrubber:**

4 The PM<sub>2.5</sub> emission factors shall be based on the most recent stack test and verified  
5 by parametric monitoring as outlined in IX.H.11.g.i.B.III

6  
7 Where mixtures of fuel are used in a Unit, the above factors shall be  
8 weighted according to the use of each fuel.

9  
10 B. The default emission factors listed in IX.H.12.m.i.A above apply until such time  
11 as stack testing is conducted as provided in IX.H.11.e or as outlined below:

12  
13 Initial PM<sub>2.5</sub> stack testing on the FCC wet gas scrubber stack shall be  
14 conducted no later than January 1, 2019 and at least once every three (3) years  
15 thereafter. Stack testing shall be performed as outlined in IX.H.11.e.

16  
17 C. Compliance with the Source wide PM<sub>2.5</sub> Cap shall be determined for each day  
18 as follows: Total 24-hour PM<sub>2.5</sub> emissions for the emission points shall be  
19 calculated by adding the daily results of the PM<sub>2.5</sub> emissions equations listed  
20 below for natural gas, plant gas, and fuel oil combustion. These emissions shall  
21 be added to the emissions from the wet scrubber to arrive at a combined daily  
22 PM<sub>2.5</sub> emission total.

23 For purposes of this subsection a "day" is defined as a period of 24 hours  
24 commencing at midnight and ending at the following midnight.

25 Daily natural gas and plant gas consumption shall be determined through the use of  
26 flow meters.

27  
28 Daily fuel oil consumption shall be monitored by means of leveling gauges on all  
29 tanks that supply combustion sources.

30  
31 The emissions for each emitting unit shall be calculated by multiplying the hours of  
32 operation of a unit feed rate to a unit, or quantity of each fuel combusted at each  
33 affected unity by the associated emission factor, and summing the results.

34  
35 Results shall be tabulated for each day, and records shall be kept which include the  
36 meter readings (in the appropriate units) and the calculated emissions.

37  
38 **ii. Source wide NO<sub>x</sub> Cap**

39  
40 No later than January 1, 2019, combined emissions of NO<sub>x</sub> shall not exceed 2.3 tons  
41 per day (tpd) and 475 tons per rolling 12-month period.

42  
43 **A. Setting of emission factors:**

44  
45 The emission factors derived from the most current performance test shall be  
46 applied to the relevant quantities of fuel combusted. Unless adjusted by  
47 performance testing as discussed in IX.H.12.m.ii.B below, the default emission  
48 factors to be used are as follows:

1 Natural gas/refinery fuel gas combustion using:  
2 Low NO<sub>x</sub> burners (LNB): 0.051 lbs/MMbtu  
3 Ultra-Low NO<sub>x</sub> (ULNB) burners: 0.04 lbs/MMbtu  
4 Diesel fuel: shall be determined from the latest edition of AP-42 or other  
5 EPA-approved methods.  
6

7 B.—The default emission factors listed in IX.H.12.m.ii.A above apply unless  
8 stack testing results are available or emissions are measured by operation of  
9 a NO<sub>x</sub> CEMS.

10  
11 Initial NO<sub>x</sub> stack testing on natural gas/refinery fuel gas combustion equipment  
12 above 100 MMBtu/hr has already been performed and shall be conducted at least  
13 once every three (3) years. At that time a new flow-weighted average emission  
14 factor in terms of lbs/MMbtu shall be derived. Stack testing shall be performed  
15 as outlined in IX.H.11.e. Stack testing is not required for natural gas/refinery  
16 fuel gas combustion equipment with a NO<sub>x</sub> CEMS.  
17

18 C.—Compliance with the source-wide NO<sub>x</sub> Cap shall be determined for each day as  
19 follows: Total 24-hour NO<sub>x</sub> emissions shall be calculated by adding the  
20 emissions for each emitting unit. The emissions for each emitting unit shall be  
21 calculated by  
22 multiplying the hours of operation of a unit, feed rate to a unit, or quantity of  
23 each fuel combusted at each affected unit by the associated emission factor,  
24 and summing the results.  
25

26 A NO<sub>x</sub> CEM shall be used to calculate daily NO<sub>x</sub> emissions from the FCCU wet  
27 gas scrubber stack. Emissions shall be determined by multiplying the nitrogen  
28 dioxide concentration in the flue gas by the flow rate of the flue gas. The NO<sub>x</sub>  
29 concentration in the flue gas shall be determined by a CEM as outlined in  
30 IX.H.11.f.  
31

32 Daily natural gas and plant gas consumption shall be determined through the use of  
33 flow meters.  
34

35 Daily fuel oil consumption shall be monitored by means of leveling gauges on all  
36 tanks that supply combustion sources.  
37

38 For purposes of this subsection a "day" is defined as a period of 24 hours  
39 commencing at midnight and ending at the following midnight.  
40

41 Results shall be tabulated for each day, and records shall be kept which include the  
42 meter readings (in the appropriate units) and the calculated emissions.  
43

44 iii.—Source-wide SO<sub>2</sub> Cap  
45

46 No later than January 1, 2019, combined emissions of SO<sub>2</sub> shall not exceed 3.8 tons  
47 per day (tpd) and 300 tons per rolling 12-month period.  
48

49 A.—Setting of emission factors:

1  
2 The emission factors derived from the most current performance test shall be applied  
3 to the relevant quantities of fuel combusted. The default emission factors to be used  
4 are as follows:

5  
6 Natural gas: EF = 0.0006  
7 lb/MMBtu Propane: EF = 0.0006  
8 lb/MMBtu

9 Diesel fuel: shall be determined from the latest edition of AP-42 or other  
10 EPA approved methods.

11  
12 Plant fuel gas: the emission factor shall be calculated from the H<sub>2</sub>S measurement or  
13 from the SO<sub>2</sub> measurement obtained by direct testing/monitoring.

14  
15 Where mixtures of fuel are used in a unit, the above factors shall be  
16 weighted according to the use of each fuel.

17  
18 B. Compliance with the source wide SO<sub>2</sub> Cap shall be determined for each  
19 day as follows: Total daily SO<sub>2</sub> emissions shall be calculated by adding the  
20 daily SO<sub>2</sub>  
21 emissions for natural gas, plant fuel gas, and propane combustion to those from the  
22 wet gas scrubber stack.

23  
24 Daily SO<sub>2</sub> emissions from the FCCU wet gas scrubber stack shall be  
25 determined by multiplying the SO<sub>2</sub> concentration in the flue gas by the flow  
26 rate of the flue gas.

27 The SO<sub>2</sub> concentration in the flue gas shall be determined by a CEM as outlined  
28 in IX.H.11.f.

29  
30 SRUs: The emission rate shall be determined by multiplying the sulfur dioxide  
31 concentration in the flue gas by the flow rate of the flue gas. The sulfur dioxide  
32 concentration in the flue gas shall be determined by CEM as outlined in  
33 IX.H.11.f

34  
35 Daily SO<sub>2</sub> emissions from other affected units shall be determined by  
36 multiplying the quantity of each fuel used daily at each affected unit by the  
37 appropriate emission factor.

38  
39 Daily natural gas and plant gas consumption shall be determined through the use of  
40 flow meters.

41  
42 Daily fuel oil consumption shall be monitored by means of leveling gauges on all  
43 tanks that supply combustion sources.

44  
45 Results shall be tabulated for each day, and records shall be kept which include  
46 CEM readings for H<sub>2</sub>S (averaged for each one-hour period), all meter reading (in  
47 the appropriate units), fuel oil parameters (density and wt% sulfur for each day any  
48 fuel oil is burned), and the calculated emissions.

~~C. Instead of complying with Condition IX.H.11.g.ii.A, source may reduce the H<sub>2</sub>S content of the refinery plant gas to 60 ppm or less or reduce SO<sub>2</sub> concentration from fuel gas combustion devices to 8 ppmvd at 0% O<sub>2</sub> or less as described in 40 CFR 60.102a. Compliance shall be based on a rolling average of 365 days. The owner/operator shall comply with the fuel gas or SO<sub>2</sub> emissions monitoring requirements of 40 CFR 60.107a and the related recordkeeping and reporting requirements of 40 CFR 60.108a. As used herein, refinery "plant gas" shall have the meaning of "fuel gas" as defined in 40 CFR 60.101a, and may be used interchangeably.]~~

i. NOx Emissions to the atmosphere from the indicated emission points shall not exceed the following rates and concentrations. The averaging period for the following emission limits is determined on a 30-day rolling average.

<u>Emission Points</u>	<u>Emission Rate (lb/MMBtu)</u>
<u>1. Crude Unit Furnace H-101</u>	<u>0.054 lb/MMBtu</u>
<u>2. UFU Furnace F-1</u>	<u>0.065 lb/MMBtu</u>

ii. Initial NOx stack testing has been performed for the Crude Unit Furnace H-101 and UFU Furnace F-1 and shall be conducted at least once annually from the date of the last stack test. Stack testing shall be performed as outlined in IX.H.11.e.

iii. Emissions to the atmosphere from the cogeneration turbines with heat recovery steam generation CG1 and CG2 shall not exceed the following concentration. The averaging period for the following emission limit is determined on a 30-day rolling average.

<u>1. Pollutant</u>	<u>ppmdv (15% O<sub>2</sub> dry)</u>
<u>NOx</u>	<u>32</u>

2. Initial NOx stack testing has been performed and shall be conducted at least once every two (2) years from the date of the last stack test. Stack testing shall be performed as outlined in IX.H.11.e.

3. The above emission limits apply to steady state operations when ambient temperature is between 0 °F and 120 °F, not including startup, shutdown, and minimum power load operations.

iv. Startup / Shutdown / Minimum Power Load Emission Minimization Plan

1. Startup and shutdown events shall not exceed 614 hours per 12-month rolling period per turbine.

2. Cumulative minimum power load operations shall not exceed 421 hours per 12-month rolling period per turbine.

1 3. Startup begins when the fuel valves open and natural gas or fuel gas is supplied to  
2 the combustion turbines.

3  
4 4. Startup ends when the following conditions are met:

5  
6 a. The gas temperature is at least 575 °F, and the unit has reached an output of  
7 50% operating load.

8  
9 5. Shutdown begins when the unit load or output is reduced below 50% operating  
10 load with the intent of removing the unit from service.

11  
12 6. Shutdown ends at the cessation of fuel input to the turbine combustor.

13  
14 7. Minimum Power Load begins when the turbine generator is less than 50%  
15 operating load and the heat recovery steam generation unit is no longer  
16 supplemental fired, with the intent to continue operation of the turbine generator at  
17 minimum power make.

18  
19 8. Minimum Power Load ends when the turbine generator is greater than 50%  
20 operating load.

21  
22 9. Turbine output (turbine load) shall be monitored and recorded on an hourly basis  
23 with an electrical meter.

24  
25 v. SO<sub>2</sub> emissions from the SRU/TGTU/TGI shall be limited to:

26  
27 A. 1.68 tons per day (tpd) for up to 21 days per rolling 12-month period, and

28  
29 B. 0.69 tpd for the remainder of the rolling 12-month period.

30  
31 C. Daily sulfur dioxide emissions from the SRU/TGI/TGTU shall be determined by  
32 multiplying the SO<sub>2</sub> concentration in the flue gas by the mass flow of the flue  
33 gas. The sulfur dioxide concentration in the flue gas shall be determined by  
34 CEM as outlined in IX.H.11.f

35  
36 vi. ~~[Emergency and Standby Equipment~~

37  
38 ~~A. The use of diesel fuel meeting the specifications of 40 CFR 80.510 is allowed~~  
39 ~~in standby or emergency equipment at all times.]~~

40  
41 vi. No later than January 1, 2019, the owner/operator shall install the following to  
42 control emissions from the listed equipment:

<b>Emission Unit</b>	<b>Control Equipment</b>
FCCU / CO Boiler	Wet Gas Scrubber, LoTOx
Furnace F-1	Ultra Low NOx Burners
Tanks	Tank Degassing Controls
North and South Flares	Flare Gas Recovery

Furnace H-101	Ultra Low NOx Burners
Truck loading rack	Vapor recovery unit
Sulfur recovery unit	Tail Gas Treatment Unit
API separator	Floating roof (single seal)

n. The Procter & Gamble Paper Products Company

- i. Emissions to the atmosphere at all times from the indicated emission points shall not exceed the following rates:

Source: Paper Making Boilers (Each)

Pollutant	Oxygen Ref.	lb/hr
NOx	3%	3.3
PM2.5 (Filterable and Condensables)	3%	0.9

Source: Paper Machine Process Stack

Pollutant	Oxygen Ref.	lb/hr
NOX	3%	13.50
PM2.5 (Filterable and Condensables)	3%	17.95

Source: Utility Boilers (Each)

Pollutant	Oxygen Ref.	lb/hr
NOX	3%	1.8
PM2.5 (Filterable and Condensables)	3%	0.74

- A. Compliance with the above emission limits shall be determined by stack test as outlined in Section IX Part H.11.e of this SIP.
- B. Subsequent to initial compliance testing, stack testing is required at a minimum of once every three years.

ii. Boiler Startup/Shutdown Emissions Minimization Plan

- A. Startup begins when natural gas is supplied to the Boiler(s) with the intent of combusting the fuel to generate steam. Startup conditions end within thirty (30) minutes of natural gas being supplied to the boilers(s).
- B. Shutdown begins with the initiation of the stop sequence of the boiler until the cessation of natural gas flow to the boiler.

1                   iii. Paper Machine Startup/Shutdown Emissions Minimization Plan  
2

3                   A. Startup begins when natural gas is supplied to the dryer combustion equipment with  
4                   the intent of combusting the fuel to heat the air to a desired temperature for the  
5                   paper machine. Startup conditions end within thirty (30) minutes of natural gas  
6                   being supplied to the dryer combustion equipment.  
7

8                   B. Shutdown begins with the diversion of the hot air to the dryer startup stack and  
9                   then the cessation of natural gas flow to the dryer combustion equipment.  
10                  Shutdown conditions end within thirty (30) minutes of hot air being diverted to  
11                  the dryer startup stack.  
12

13                  o. Utah Municipal Power Association: West Valley Power Plant.  
14

- 15                  i. Total emissions of NOx from all five (5) catalytic-controlled turbines combined shall  
16                  be no greater than 1050 lb of NOx on a daily basis. For purposes of this subpart, a  
17                  "day" is defined as a period of 24-hours commencing at midnight and ending at the  
18                  following midnight.  
19
- 20                  ii. Emissions of NOx shall not exceed 5 ppmdv (@ 15% O2, dry) on a 30-day rolling average.  
21
- 22                  iii. Total emissions of NOx from all five (5) catalytic-controlled turbines shall include  
23                  the sum of all periods in the day including periods of startup, shutdown, and  
24                  maintenance.  
25
- 26                  iv. The NOx emission rate (lb/hr) shall be determined by CEM. The CEM  
27                  shall operate as outlined in IX.H.11.f.  
28

29                  p. University of Utah: University of Utah Facilities  
30

- 31                  i. Emissions to the atmosphere from the listed emission points in Building 303  
32                  LCHWTP shall not exceed the following concentrations:  
33

Emissions Point	Pollutant	ppmdv (3% O2 dry)
BoilerA#4* B	NOx	187
Boiler1s)#6 & 7 B	NOx	9
Boiler2)#9* C	NOx	9
Turbine D	NOx	9

Turbine and WHRU Duct burner NOx 15

\*By December 31, 2019, Boiler #4 will be decommissioned and Boiler #9 will be installed and operational.

ii. Stack testing to show compliance with the emissions limitations of Condition i above shall be performed as outlined in IX.H.11.e and as specified below:

Emissions Point	Pollutant	Initial Test	Test Frequency
Boiler #4*	NOx	*	#
Boilers #6 & 7 .C	NOx	*	#
Boiler #9* .C	NOx	2020	#
Turbine	NOx	*	#
Turbine and WHRU Duct Burner	NOx	*	#

Initial test already performed

\* Initial tests have been performed and the next method test using EPA approved test methods shall be performed within 3 years of the last stack test. Initial compliance testing for Boiler #9 is required. The initial test date shall be performed within 60 days after achieving the maximum heat input capacity production rate at which the affected facility will be operated and in no case later than 180 days after the initial startup of a new emission source.

# A compliance test shall be performed at least once every three years from the date of the last compliance test that demonstrated compliance with the emission limit(s). Compliance testing shall be performed using EPA approved test methods acceptable to the Director. The Director shall be notified, in accordance with all applicable rules, of any compliance test that is to be performed.

iii. Boiler #4 in the LCHWTP shall be decommissioned and replaced by Boiler #9 by December 31, 2019.

iv. By the end of the third quarter of calendar year 2019, Boilers #1, #3, and #4 in the UCHWTP shall be limited to a natural gas usage of 530 MMscf per calendar year.

1 v. The HSC Transformation Project boilers shall be installed and operational by the end  
2 of the third quarter of calendar year 2019. The new HSC Transformation Project  
3 boilers shall be equipped with low NOx burners rated at 30 ppmvd at 3% O2 or  
4 less.

5  
6 vi. Records shall be kept on site which indicate the date, and time of startup and shutdown.  
7

8 q. Hill Air Force Base  
9

10 i. Painting and Depainting Operations  
11

12 A. VOC emissions from painting and depainting operations shall not exceed 0.58 tons per  
13 day (tpd).  
14

15 I. No later than the 28<sup>th</sup> of each month, a rolling 30-day VOC emission  
16 average shall be calculated for the previous month.  
17

18 ii. Boilers  
19

20 A. The combined NOx emissions for all boilers (except those less than 5 MMBtu/hr)  
21 shall not exceed 95 lb/hr. This limit shall not apply during periods of  
22 curtailment.  
23

24 I. No later than the 28<sup>th</sup> of each month, the NOx lb/hr emission total  
25 shall be calculated for the previous month.  
26

27 B. No later than December 31, 2024, no boiler shall be operating on base with the  
28 capacity over 30 MMBtu/hr and with a manufacture date older than January 1,  
29 1989.  
30

## MEMORANDUM

1  
2  
3 To: File: 11386 – Hexcel Corporation  
4  
5 Through: Jon L. Black, Major New Source Review Section Manager  
6  
7 From: Tad Anderson, Engineer, Major New Source Review Section  
8  
9 Date: January 2, 2025  
10  
11 Subject: PM2.5 SIP Condition Amendment Request  
12

---

13 On June 11, 2024, Hexcel Corporation (Hexcel) met with UDAQ to discuss the feasibility of two of the  
14 PM2.5 SIP conditions. The two conditions Hexcel is requesting a feasibility determination on pertain to  
15 Ultra Low NOx Burners (condition H.12.f.iv) and De-NOx Water systems (condition H.12.f.v). Hexcel  
16 submitted two letters on August 1, 2024 addressing the technical feasibility of Ultra Low NOx Burners  
17 with flue gas recirculation on fiber lines 3, 4, and 7 and De-NOx Water Direct Fired Thermal Oxidizer on  
18 fiber lines 13, 14, 15 and 16. UDAQ requested additional information for the technical feasibility.  
19 Hexcel submitted the “SIP Conditions Amendment Request Additional Information” on December 5,  
20 2024. This response addressed both conditions and included an updated BACM analysis. Each SIP  
21 requested removal condition will be addressed individually below.  
22

### 23 Condition H.12.f.iv

24 *“Ultra Low NOx Burners with flue gas recirculation shall be installed on Fiber Lines 3, 4 and 7 to*  
25 *control NOx emissions no later than December 31, 2024.”*  
26

27 Hexcel has submitted a “SIP Condition Amendment Request” on August 1, 2024 and additional  
28 information submitted “SIP conditions Amendment Request Additional Information” on December 6,  
29 2024, which contained a request to remove Condition H.12.f.iv (Ultra Low NOx Burners on fiber lines 3,  
30 4 and 7) due to technical infeasibility.  
31

32 The submitted documents describe the operational requirements for the thermal oxidizers on fiber lines 3,  
33 4 and 7. The thermal oxidizers are used as a control device for hydrogen cyanide, ammonia and VOCs.  
34 For the thermal oxidizer to operate correctly for the combustion of the hydrogen cyanide, the temperature  
35 must be maintained at approximately 1,400 degrees Fahrenheit. With the addition of the flue gas  
36 recirculation on the low NOx burners to lower the NOx emissions to 9 ppm, the flue gas recirculation  
37 reduces the combustion temperatures (to approximately 1000 degrees Fahrenheit) to lower thermal NOx  
38 creation. For this reason, flue gas recirculation is not technically feasible to be added to a thermal  
39 oxidizer.  
40

41 The burner size for the existing thermal oxidizers for fiber lines 3 (0.75 MMBtu/hr), 4 (2.0 MMBtu/hr)  
42 and 7 (0.30 MMBtu/hr) are all below 5 MMBtu/hr. Hexcel hired an internationally reputed industrial  
43 pollution control company to determine if the existing burners can be replaced with Ultra Low NOx  
44 burners. The company contacted Honeywell, Fives and Access (burner manufacturers) to determine if  
45 there were any burners that could operate at 1400 degrees Fahrenheit with a low NOx emissions rate. All  
46 three burner companies had no burners at the existing size that could meet the 9 ppm and 1400 degrees  
47 Fahrenheit.  
48

1 The submitted “*SIP conditions Amendment Request Additional Information*” on December 6, 2024,  
2 contained an updated BACM. The BACM included a top-down analysis of all the control technologies  
3 for lowering NOx emissions. The BACM demonstrated that Low NOx burner operation on the thermal  
4 oxidizer is technically infeasible. The replacement of the existing burner with a direct fired thermal  
5 oxidizer is technically feasible. The lowest cost to replace the thermal oxidizer with a direct fired thermal  
6 oxidizer is \$94,398 per ton removed for fiber line #7 making the replacement economically infeasible.

7  
8 Condition H.12.f.v

9 “*De-NOx Water Direct Fired Thermal Oxidizer (DFTO) shall be installed on Fiber Lines 13, 14, 15, and*  
10 *16 to control NOx emissions no later than December 31, 2024.*”

11  
12 Hexcel has submitted a “*SIP Condition Amendment Request*” on August 1, 2024 and additional  
13 information submitted “*SIP conditions Amendment Request Additional Information*” on December 6,  
14 2024, which contained a request to remove Condition H.12.f.v (De-NOx Water Direct Fired Thermal  
15 Oxidizer on fiber lines 13 thru 16) due to technical infeasibility.

16  
17 The submitted documents described the operational implications from installing the De-NOx water  
18 system to the DFTO. Hexcel has installed the De-NOx water system on Fiber Lines 13, 14, 15 and 16 to  
19 meet the SIP requirements. Once installed and operating, Hexcel experienced the following operational  
20 complications. Hexcel noticed “caking” in the baghouse located downstream of the system. The caking  
21 of the baghouse decreases the removal efficiency and increases maintenance operations which increases  
22 down time. Hexcel experienced an increase in natural gas usage on Fiber Lines 13, 14, 15 and 16, since  
23 the De-NOx water system decreases the burner temperature. The increase in natural gas increases the  
24 combustion emissions of all the associated fiber lines which leads to the formation of more NOx. In  
25 March 2024, Hexcel stack tested the fiber lines and the testing indicated that the De-water system lowered  
26 the destruction removal efficiency of hydrogen cyanide and ammonia. Hexcel hired an internationally  
27 reputed industrial pollution control company to provide a technical analysis of why the De-NOx water  
28 system was not working as designed. The industrial pollution control company concluded that, due to the  
29 DFTO requiring a multi-stage combustion chamber configuration and the system not operating in a zero-  
30 oxygen environment, the De-NOx water system is unable to achieve the designed NOx reductions. The  
31 industrial pollution control company also concluded that the existing system would require extensive  
32 retrofitting to the DFTO. For this reason, the implementation of the De-NOx water system to the DFTO  
33 is not technically feasible.

34  
35 The use of ultra-low NOx burners with flue gas recirculation and the installation of the De-NOx water  
36 system were not included in the original conclusion for Hexcel’s PM2.5 SIP Evaluation Report and were  
37 not considered as “PM2.5 SIP Specific Requirements” (Section 5 of the UTAH PM2.5 SIP SERIOUS  
38 Evaluation Report dated July 1, 2018). Hexcel submitted a revised BACT analysis on June 19, 2018,  
39 after the June Board meeting. The June 19<sup>th</sup> submittal revised the economic analysis, which resulted in  
40 the costs of some of the equipment being considered economically feasible. UDAQ had originally  
41 determined the equipment was not economically feasible based on the original economic analysis  
42 received prior to the June meeting. Therefore, based on the revised information, UDAQ had incorporated  
43 new requirements into the final draft as a consideration for ultra-low NOx burners and De-NOx water  
44 system. The PM2.5 SIP modeling analysis had already been completed at this time and there was no need  
45 to revisit the model as this was an assumed reduction in potential emissions which would not affect the  
46 model. Therefore, the removal of the ultra-low NOx burners and De-NOx water system will not result in  
47 an emission increase as these potential reductions in emissions were never considered in the original  
48 modeling analysis performed for the PM2.5 Serious SIP demonstration.

49

1 Conclusion

2 The UDAQ has reviewed the submitted documentation and agrees that the Low NO<sub>x</sub> burner operation on  
3 the thermal oxidizer is technically infeasible, the replacement of the existing burner with a direct fired  
4 thermal oxidizer is technically feasible and the cost to replace the thermal oxidizers with a direct fired  
5 thermal oxidizer is economically infeasible.

6

7 The UDAQ will remove PM<sub>2.5</sub> SIP conditions IX.H.12.f.iv and IX.H.12.f.v, amend the Utah PM<sub>2.5</sub> SIP  
8 Serious Evaluation Report for Hexcel Corporation to incorporate the cost analysis for replacing the  
9 thermal oxidizers with direct fired thermal oxidizers, and update the technological feasibility analysis for  
10 the implementation of a De-NO<sub>x</sub> water system to the DFTO.

11

12

# ITEM 9

# Air Toxics



State of Utah

SPENCER J. COX  
Governor

DEIDRE HENDERSON  
Lieutenant Governor

Department of  
Environmental Quality

Kimberly D. Shelley  
Executive Director

DIVISION OF AIR QUALITY  
Bryce C. Bird  
Director

DAQA-757-24

**MEMORANDUM**

**TO:** Air Quality Board

**FROM:** Bryce C. Bird, Executive Secretary

**DATE:** November 5, 2024

**SUBJECT:** Air Toxics, Lead-Based Paint, and Asbestos (ATLAS) Section Compliance Activities – October 2024

---

Asbestos Demolition/Renovation NESHAP Inspections	9
Asbestos AHERA Inspections	9
Asbestos State Rules Only Inspections	3
Asbestos Notification Forms Accepted	182
Asbestos Telephone Calls	358
Asbestos Individuals Certifications Approved	114
Asbestos Company Certifications	13
Asbestos Alternate Work Practices Approved	5
Lead-Based Paint (LBP) Inspections	2
LBP Notification Forms Approved	0
LBP Telephone Calls	84
LBP Letters Prepared and Mailed	7
LBP Courses Reviewed/Approved	0
LBP Course Audits	0
LBP Individual Certifications Approved	44

LBP Firm Certifications	25
Notices of Violation Sent	0
Compliance Advisories Sent	10
Warning Letters Sent	2
Settlement Agreements Finalized	2
Penalties Agreed to:	
Squires Construction/Calvin Squires	\$1,200.00
Asbestos Abatement Services, LLC/Stephen Cisney	<u>\$150.00</u>
Total:	\$1,350.00



State of Utah

SPENCER J. COX  
Governor

DEIDRE HENDERSON  
Lieutenant Governor

Department of  
Environmental Quality

Kimberly D. Shelley  
Executive Director

DIVISION OF AIR QUALITY  
Bryce C. Bird  
Director

DAQA-803-24

**MEMORANDUM**

**TO:** Air Quality Board

**FROM:** Bryce C. Bird, Executive Secretary

**DATE:** December 3, 2024

**SUBJECT:** Air Toxics, Lead-Based Paint, and Asbestos (ATLAS) Section Compliance Activities – November 2024

---

Asbestos Demolition/Renovation NESHAP Inspections	6
Asbestos AHERA Inspections	10
Asbestos State Rules Only Inspections	3
Asbestos Notification Forms Accepted	125
Asbestos Telephone Calls	296
Asbestos Individuals Certifications Approved	103
Asbestos Company Certifications	14
Asbestos Alternate Work Practices Approved	2
Lead-Based Paint (LBP) Inspections	0
LBP Notification Forms Approved	0
LBP Telephone Calls	69
LBP Letters Prepared and Mailed	1
LBP Courses Reviewed/Approved	0
LBP Course Audits	0
LBP Individual Certifications Approved	13

DAQA-803-24

Page 2

LBP Firm Certifications	7
Notices of Violation Sent	0
Compliance Advisories Sent	4
Warning Letters Sent	7
Settlement Agreements Finalized	1
Penalties Agreed to:	
Impact Demolition/AJ Kim	\$250.00



State of Utah

SPENCER J. COX  
Governor

DEIDRE HENDERSON  
Lieutenant Governor

Department of  
Environmental Quality

Kimberly D. Shelley  
Executive Director

DIVISION OF AIR QUALITY  
Bryce C. Bird  
Director

DAQA-021-25

MEMORANDUM

**TO:** Air Quality Board

**FROM:** Bryce C. Bird, Executive Secretary

**DATE:** January 7, 2025

**SUBJECT:** Air Toxics, Lead-Based Paint, and Asbestos (ATLAS) Section Compliance Activities – December 2024

---

Asbestos Demolition/Renovation NESHAP Inspections	12
Asbestos AHERA Inspections	9
Asbestos State Rules Only Inspections	7
Asbestos Notification Forms Accepted	139
Asbestos Telephone Calls	293
Asbestos Individuals Certifications Approved	87
Asbestos Company Certifications	11
Asbestos Alternate Work Practices Approved	10
Lead-Based Paint (LBP) Inspections	2
LBP Notification Forms Approved	1
LBP Telephone Calls	55
LBP Letters Prepared and Mailed	0
LBP Courses Reviewed/Approved	0
LBP Course Audits	0
LBP Individual Certifications Approved	10

DAQA-021-25

Page 2

LBP Firm Certifications	8
Notices of Violation Sent	0
Compliance Advisories Sent	6
Warning Letters Sent	3
Settlement Agreements Finalized	0

# Compliance



State of Utah

SPENCER J. COX  
Governor

DEIDRE HENDERSON  
Lieutenant Governor

Department of  
Environmental Quality

Kimberly D. Shelley  
Executive Director

DIVISION OF AIR QUALITY  
Bryce C. Bird  
Director

DAQC-1122-24

**MEMORANDUM**

**TO:** Air Quality Board  
**FROM:** Bryce C. Bird, Executive Secretary  
**DATE:** November 6, 2024  
**SUBJECT:** Compliance Activities – October 2024

**ACTIVITIES:**

Activity	Monthly Total	36-Month Average
Inspections	80	61
On-Site Stack Test & CEM Audits	9	5
Stack Test & RATA Report Reviews	72	38
Emission Report Reviews	30	20
Temporary Relocation Request Reviews	7	6
Fugitive Dust Control Plan Reviews	134	124
Soil Remediation Report Reviews	2	2
Open Burn Permits Issued	1,014	634
Miscellaneous Inspections <sup>1</sup>	13	16
Complaints Received	51	20
Wood Burning Complaints Received	0	3
Breakdown Reports Received	1	1
Compliance Actions Resulting from a Breakdown	0	0
VOC Inspections (Gas station vapor recovery)	0	0
Warning Letters Issued	5	2
Notices of Violation Issued	1	0
Compliance Advisories Issued	5	6
No Further Action Letters Issued	4	2
Settlement Agreements Reached	5	2
Penalties Assessed	\$3,496	\$197,867.21

<sup>1</sup>Miscellaneous inspections include, e.g., surveillance, complaint, on-site training, dust patrol, smoke patrol, open burning, etc.

**SETTLEMENT AGREEMENTS:**

<b>Party</b>	<b>Amount</b>
Maverik Trucking	\$471
Redmond Minerals	\$471
Mountain Country Foods	\$471
Intermountain Regional Landfill	\$1,500
TM Crushing – Talons Cove	\$583

**UNRESOLVED NOTICES OF VIOLATION:**

<b>Party</b>	<b>Date Issued</b>
Citation Oil and Gas (in administrative litigation)	01/15/2020
Uinta Wax Operating (formerly CH4 Finley)	07/24/2020
Finley Resources	09/15/2022
Holcim	12/19/2023
Holcim	03/27/2024
Big West Oil	07/19/2024
Holcim	08/02/2024
Flowers Bakeries, LLC	09/17/2024
Winds Exploration and Production	09/17/2024
Big West Oil	10/01/2024



State of Utah

SPENCER J. COX  
Governor

DEIDRE HENDERSON  
Lieutenant Governor

Department of  
Environmental Quality

Kimberly D. Shelley  
Executive Director

DIVISION OF AIR QUALITY  
Bryce C. Bird  
Director

DAQC-1220-24

**MEMORANDUM**

**TO:** Air Quality Board  
**FROM:** Bryce C. Bird, Executive Secretary  
**DATE:** December 11, 2024  
**SUBJECT:** Compliance Activities – November 2024

**ACTIVITIES:**

Activity	Monthly Total	36-Month Average
Inspections	72	62
On-Site Stack Test & CEM Audits	1	5
Stack Test & RATA Report Reviews	52	38
Emission Report Reviews	26	20
Temporary Relocation Request Reviews	4	6
Fugitive Dust Control Plan Reviews	90	123
Soil Remediation Report Reviews	1	2
Open Burn Permits Issued	546	649
Miscellaneous Inspections <sup>1</sup>	17	16
Complaints Received	32	20
Wood Burning Complaints Received	2	3
Breakdown Reports Received	1	1
Compliance Actions Resulting from a Breakdown	0	0
VOC Inspections (Gas station vapor recovery)	0	0
Warning Letters Issued	4	2
Notices of Violation Issued	0	0
Compliance Advisories Issued	8	6
No Further Action Letters Issued	0	2
Settlement Agreements Reached	0	2
Penalties Assessed	\$0	\$197,867.21

<sup>1</sup>Miscellaneous inspections include, e.g., surveillance, complaint, on-site training, dust patrol, smoke patrol, open burning, etc.

**SETTLEMENT AGREEMENTS:**

Party	Amount

**UNRESOLVED NOTICES OF VIOLATION:**

Party	Date Issued
Citation Oil and Gas (in administrative litigation)	01/15/2020
Uinta Wax Operating (formerly CH4 Finley)	07/24/2020
Finley Resources	09/15/2022
Holcim	12/19/2023
Holcim	03/27/2024
Big West Oil	07/19/2024
Holcim	08/02/2024
Flowers Bakeries, LLC	09/17/2024
Big West Oil	10/01/2024



State of Utah

SPENCER J. COX  
Governor

DEIDRE HENDERSON  
Lieutenant Governor

Department of  
Environmental Quality

Kimberly D. Shelley  
Executive Director

DIVISION OF AIR QUALITY  
Bryce C. Bird  
Director

DAQC-015-25

**MEMORANDUM**

**TO:** Air Quality Board  
**FROM:** Bryce C. Bird, Executive Secretary  
**DATE:** January 7, 2025  
**SUBJECT:** Compliance Activities – December 2024

**ACTIVITIES:**

Activity	Monthly Total	36-Month Average
Inspections	78	62
On-Site Stack Test & CEM Audits	0	5
Stack Test & RATA Report Reviews	48	38
Emission Report Reviews	7	20
Temporary Relocation Request Reviews	3	6
Fugitive Dust Control Plan Reviews	72	123
Soil Remediation Report Reviews	1	2
Open Burn Permits Issued	182	649
Miscellaneous Inspections <sup>1</sup>	11	16
Complaints Received	26	20
Wood Burning Complaints Received	16	3
Breakdown Reports Received	1	1
Compliance Actions Resulting from a Breakdown	0	0
VOC Inspections (Gas station vapor recovery)	0	0
Warning Letters Issued	7	2
Notices of Violation Issued	0	0
Compliance Advisories Issued	8	6
No Further Action Letters Issued	0	2
Settlement Agreements Reached	1	2
Penalties Assessed	\$2,827	\$197,867.21

<sup>1</sup>Miscellaneous inspections include, e.g., surveillance, complaint, on-site training, dust patrol, smoke patrol, open burning, etc.

**SETTLEMENT AGREEMENTS:**

<b>Party</b>	<b>Amount</b>
Lisbon Valley Mining	\$2,827


**UNRESOLVED NOTICES OF VIOLATION:**

<b>Party</b>	<b>Date Issued</b>
Citation Oil and Gas (in administrative litigation)	01/15/2020
Ovintiv Production Inc.	07/14/2020
Uinta Wax Operating (formerly CH4 Finley)	07/24/2020
Finley Resources	09/15/2022
Holcim	12/19/2023
Holcim	03/27/2024
Big West Oil (tolling agreement until 2/25/2025)	07/19/2024
Holcim	08/02/2024
Flowers Bakeries, LLC	09/17/2024
Big West Oil (tolling agreement until 2/25/2025)	10/01/2024

# Monitoring

### Utah 24-Hr PM<sub>2.5</sub> Data November 2024

	BG	BV	CV	ED	HV	HW	LN	NR	RP	RS	SF	SM	EQ	V4
Arith Mean	5	5	6	4	5	6	6	8	6	4	4	5	6	4
Max 24-hr Avg	10	9	12	9	11	12	12	15	14	10	8	10	13	6
98th percentile	10	9	12	8	11	11	12	14	13	9	8	10	12	6
Days of Data	30	30	30	30	30	30	30	30	30	30	30	30	30	30
Days >35 µg/m <sup>3</sup>	0	0	0	0	0	0	0	0	0	0	0	0	0	0

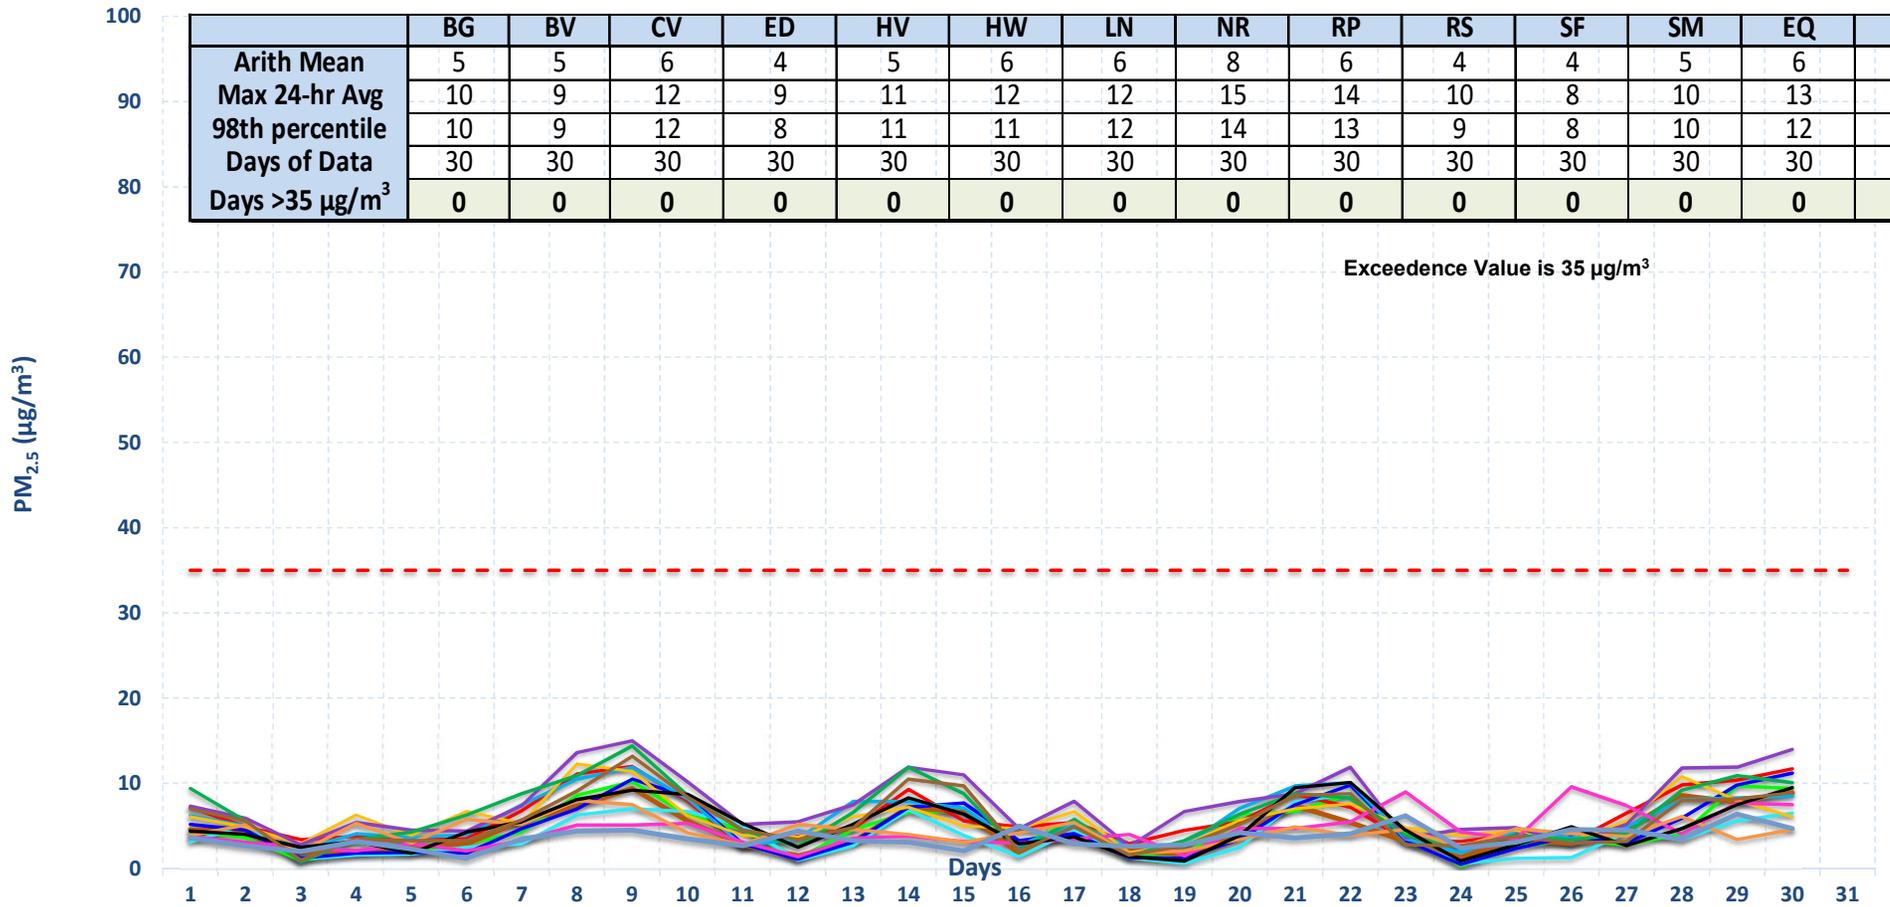


Exceedence Value is 35 µg/m<sup>3</sup>

- Brigham City
- Bountiful
- Copperview
- Erda
- Harrisville
- Hawthorne
- Lindon
- Near road
- Rose Park
- Roosevelt
- Spanish Fork
- Smithfield
- Environmental Quality \*
- Vernal
- - - 24-hr Exceedence Value is 35 µg/m<sup>3</sup>

\* Environmental Quality (EQ) previously named Technical Support Center (TSC)

### Utah 24-Hr PM<sub>2.5</sub> Data December 2024

	BG	BV	CV	ED	HV	HW	LN	NR	RP	RS	SF	SM	EQ	V4
Arith Mean	8	11	15	9	9	13	11	17	14	6	8	7	13	6
Max 24-hr Avg	21	27	44	22	25	33	30	46	36	12	27	20	35	13
98th percentile	20	27	40	22	24	33	30	45	35	12	25	19	34	12
Days of Data	31	31	31	31	31	31	31	31	31	31	31	31	31	31
Days >35 µg/m <sup>3</sup>	0	0	4	0	0	0	0	4	1	0	0	0	0	0

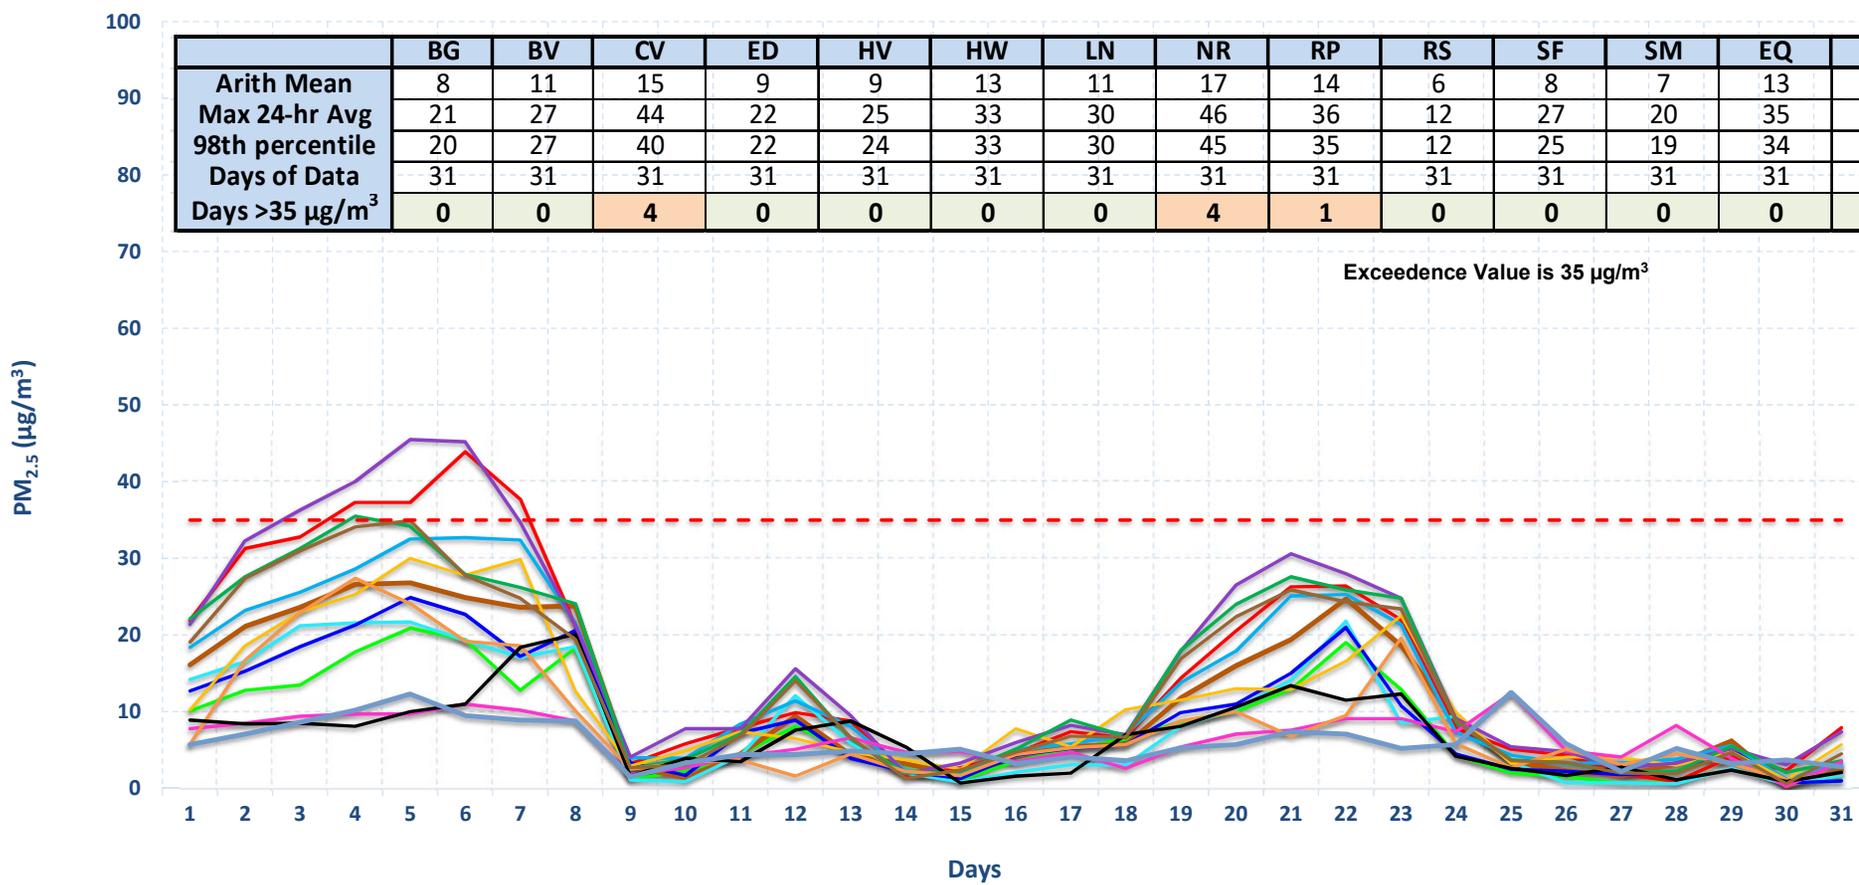


Exceedence Value is 35 µg/m<sup>3</sup>

- Brigham City
- Bountiful
- Copperview
- Erda
- Harrisville
- Hawthorne
- Lindon
- Near road
- Rose Park
- Roosevelt
- Spanish Fork
- Smithfield
- Environmental Quality \*
- Vernal
- - - 24-hr Exceedence Value is 35 µg/m<sup>3</sup>

\* Environmental Quality (EQ) previously named Technical Support Center (TSC)

### Utah 24-Hr PM<sub>2.5</sub> Data January 2025

	BG	BV	CV	ED	HV	HW	LN	NR	RP	RS	SF	SM	EQ	V4
Arith Mean	5	6	7	3	5	7	8	9	7	4	5	5	7	4
Max 24-hr Avg	17	21	25	14	18	22	18	30	27	8	12	13	24	7
98th percentile	16	19	22	12	16	19	17	27	24	7	11	13	23	7
Days of Data	19	21	21	21	21	21	21	21	21	21	21	21	21	21
Days >35 µg/m <sup>3</sup>	0	0	0	0	0	0	0	0	0	0	0	0	0	0

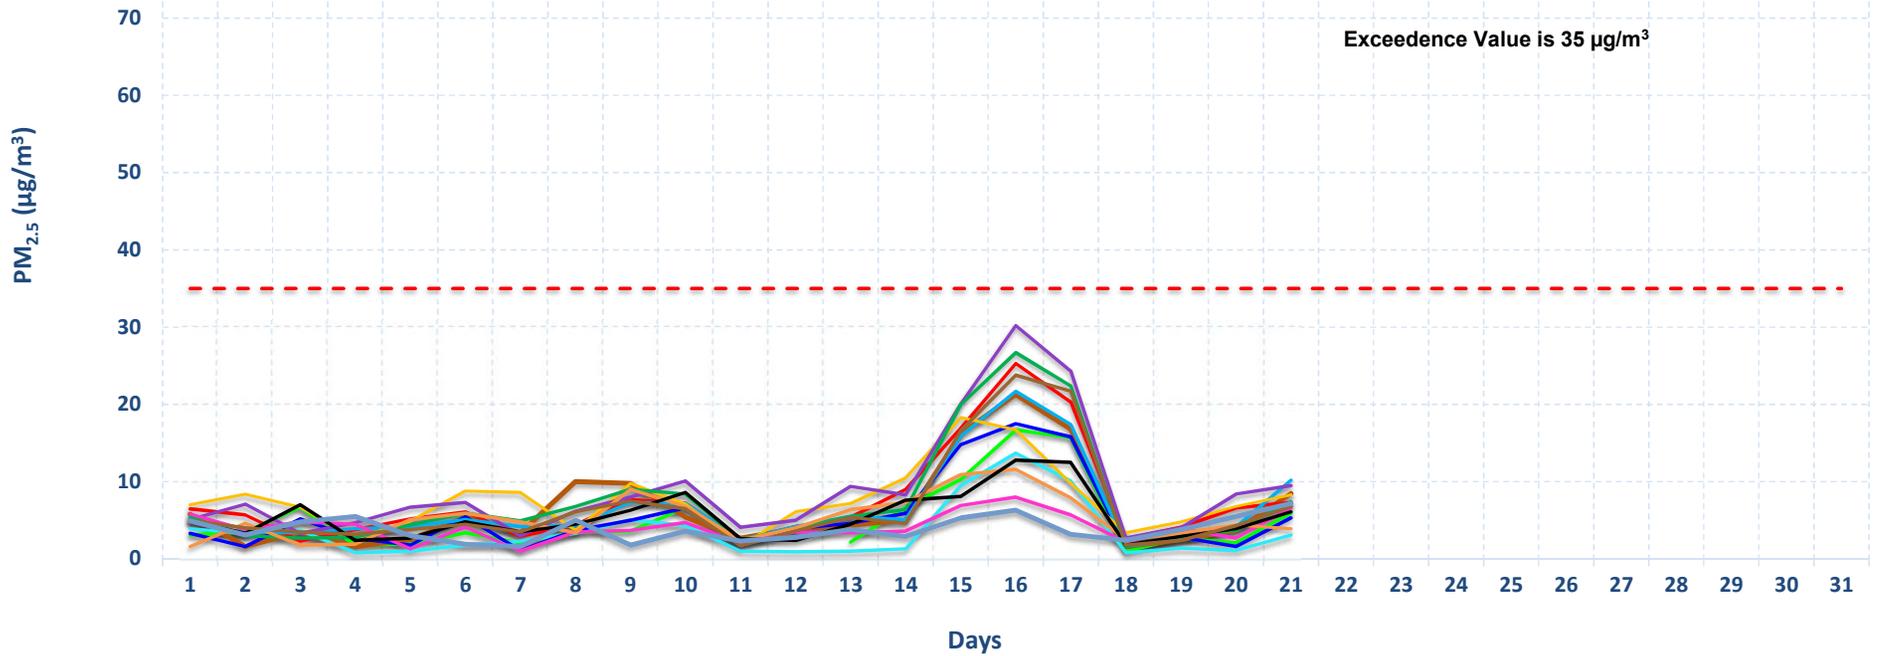


- Brigham City
- Bountiful
- Copperview
- Erda
- Harrisville
- Hawthorne
- Lindon
- Near road
- Rose Park
- Roosevelt
- Spanish Fork
- Smithfield
- Environmental Quality
- Vernal
- - - 24-hr Exceedence Value is 35 µg/m<sup>3</sup>

\* Environmental Quality (EQ) previously named Technical Support Center (TSC)

### Utah 24-hr PM<sub>10</sub> Data November 2024


	HV	HW	H3	LN	RS	EQ
Arith Mean	12	19	9	12	9	17
Max 24-hr Avg	33	41	23	29	25	37
Days of Data	30	30	30	30	30	30
Days >150 µg/m <sup>3</sup>	0	0	0	0	0	0

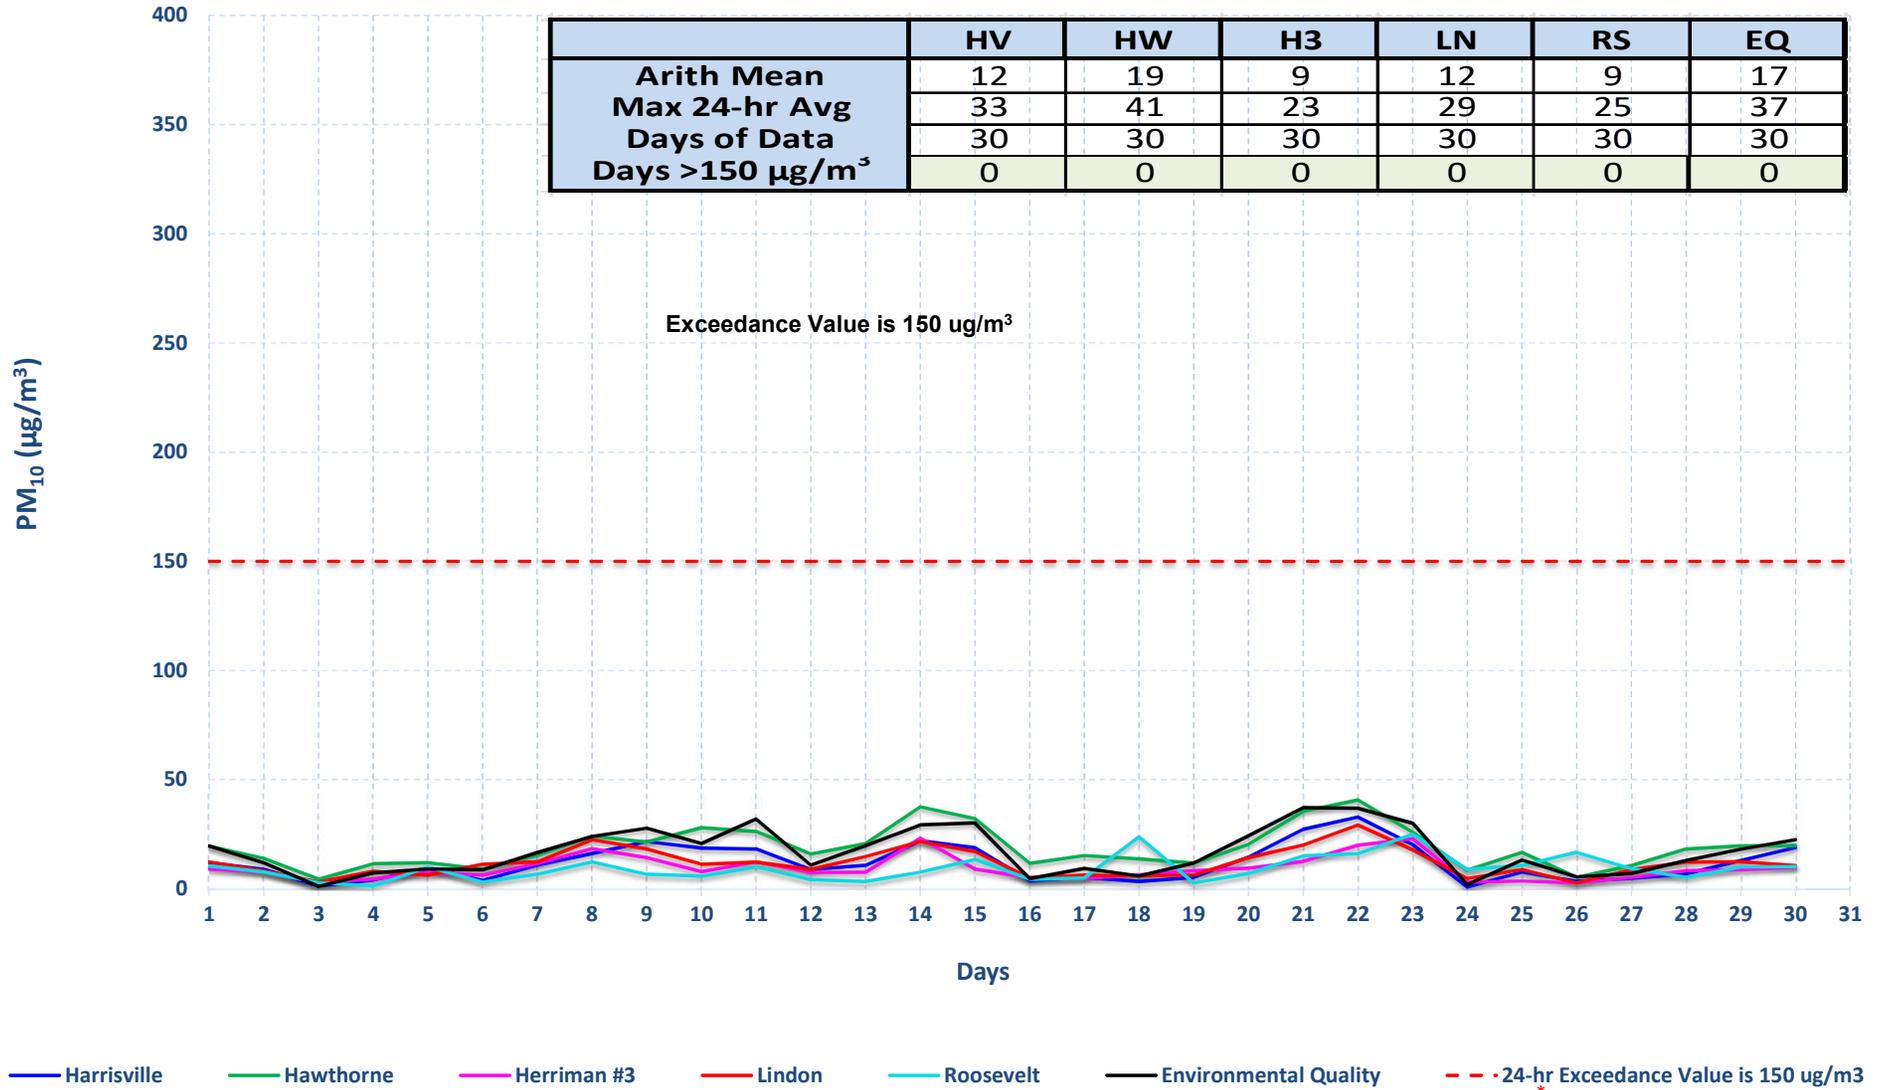

\* Environmental Quality (EQ) previously named Technical Support Center (TSC)

### Utah 24-hr PM<sub>10</sub> Data December 2024


	HV	HW	H3	LN	RS	EQ
Arith Mean	17	27	17	21	16	29
Max 24-hr Avg	40	57	43	52	28	66
Days of Data	31	31	31	31	31	31
Days >150 $\mu\text{g}/\text{m}^3$	0	0	0	0	0	0

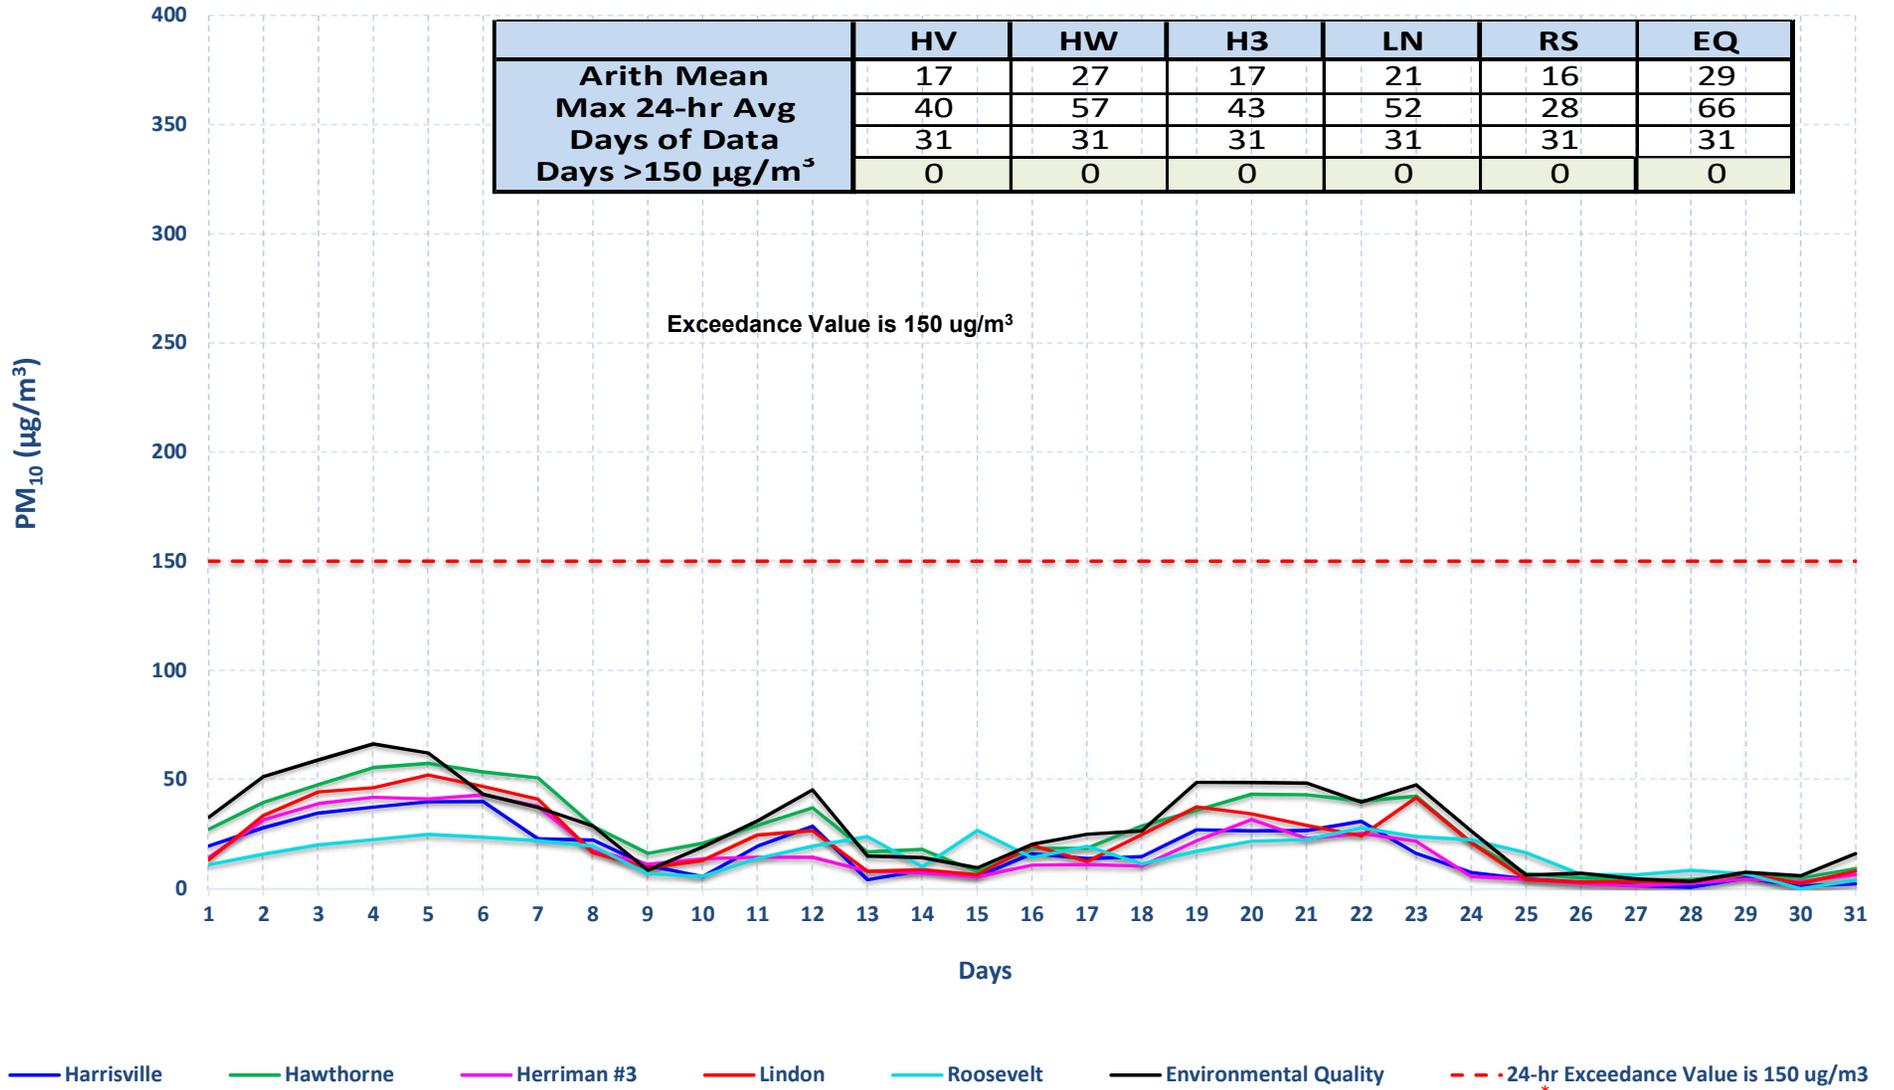

\* Environmental Quality (EQ) previously named Technical Support Center (TSC)

### Utah 24-hr PM<sub>10</sub> Data January 2025


	HV	HW	H3	LN	RS	EQ
<b>Arith Mean</b>	9	17	12	19	9	24
<b>Max 24-hr Avg</b>	31	43	43	90	23	92
<b>Days of Data</b>	21	21	21	21	21	21
<b>Days &gt;150 µg/m<sup>3</sup></b>	0	0	0	0	0	0

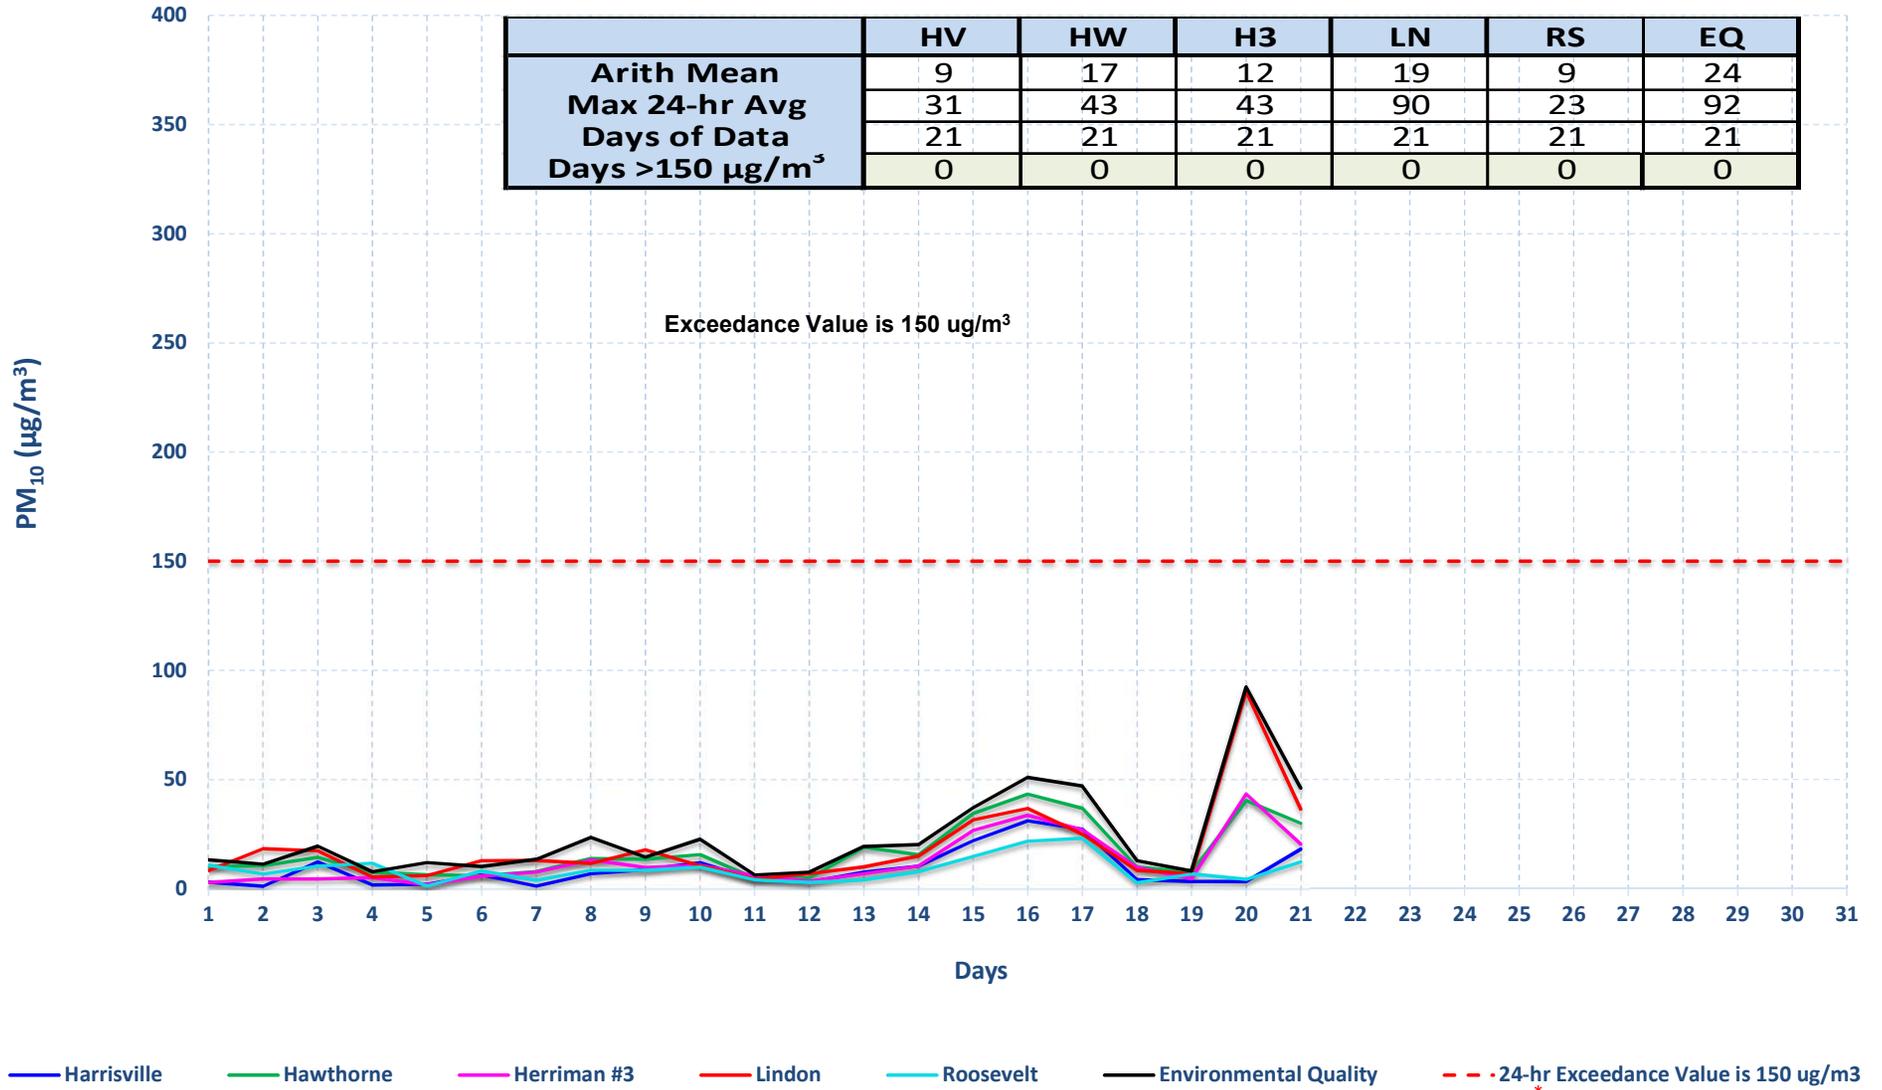

\* Environmental Quality (EQ) previously named Technical Support Center (TSC)

### Highest 8-hr Ozone Concentration and Daily Maximum Temperature November 2024


O3 NOV 2024	BV	CV	ED	H3	HV	HW	NR	RB	RP	EQ
Arith Mean	.033	.033	.038	.035	.030	.030	.027	.036	.031	.030
8-hr. Ozone 4th Max	.038	.039	.043	.042	.037	.034	.034	.040	.037	.036
Days of Data	30	30	30	30	30	30	30	30	30	30
Days > 0.070	0	0	0	0	0	0	0	0	0	0

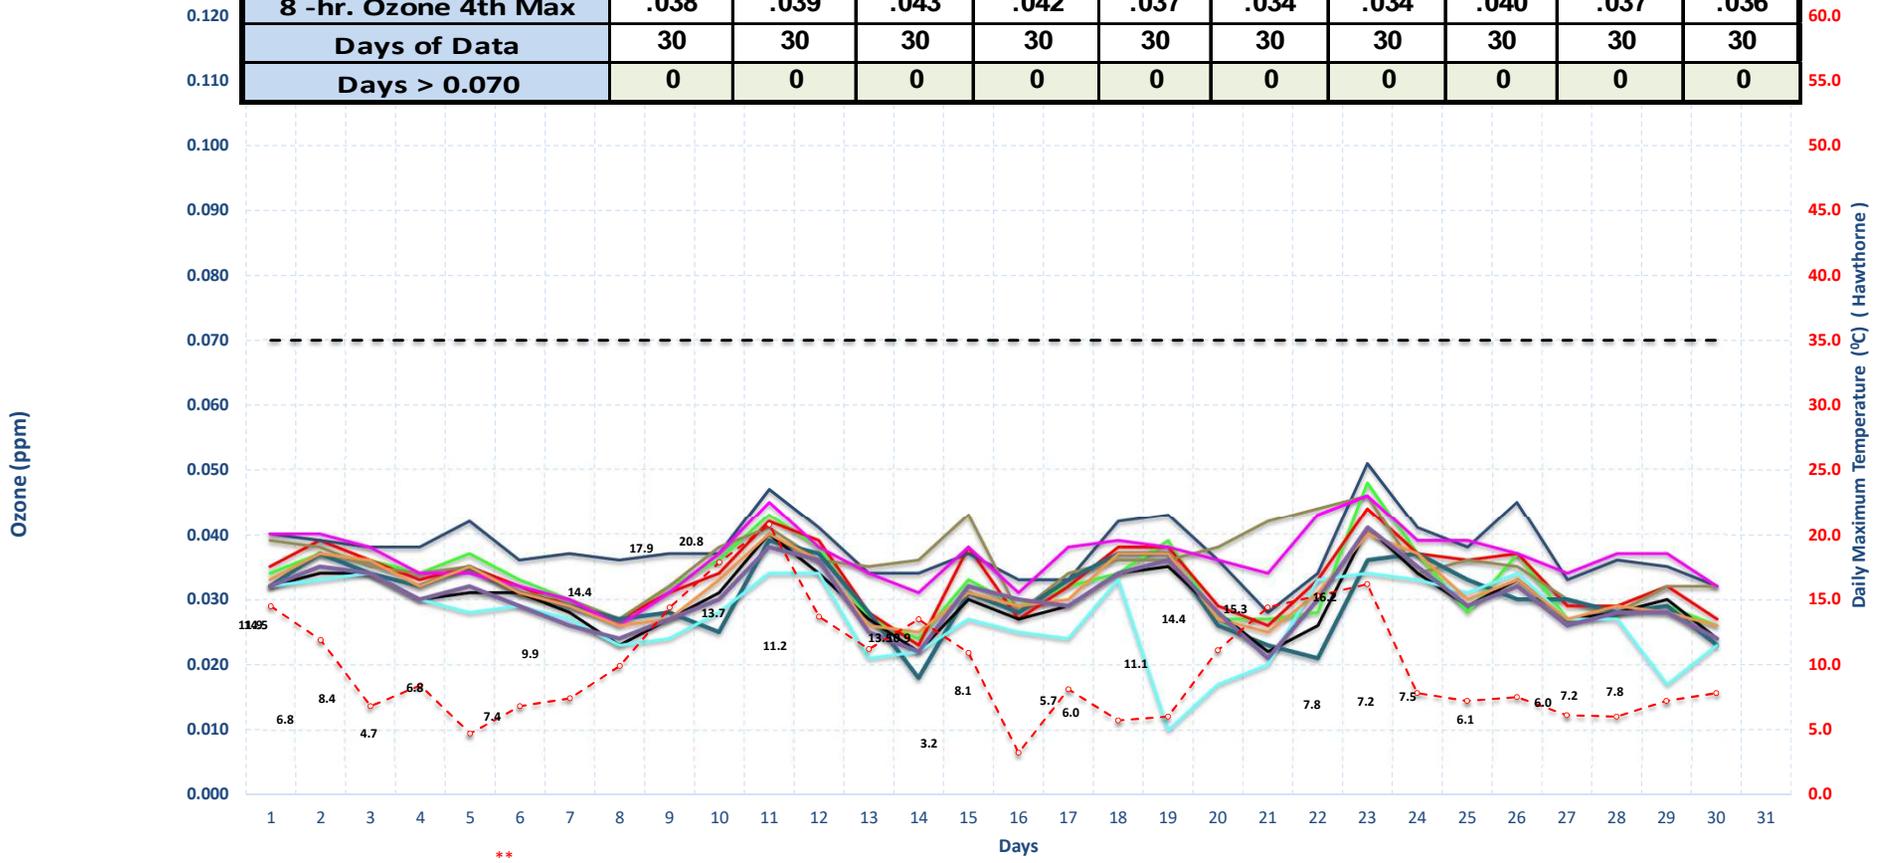

\* Environmental Quality (EQ) previously named Technical Support Center (TSC)  
 \*\* Controlling Monitor


## Highest 8-hr Ozone Concentration and Daily Maximum Temperature November 2024

	P2	RS	V4
<b>Arith Mean</b>	<b>.039</b>	<b>.034</b>	<b>.037</b>
<b>8 -hr. Ozone 4th Max</b>	<b>.044</b>	<b>.040</b>	<b>.042</b>
<b>Days of Data</b>	<b>30</b>	<b>30</b>	<b>30</b>
<b>Days &gt; 0.070</b>	<b>0</b>	<b>0</b>	<b>0</b>

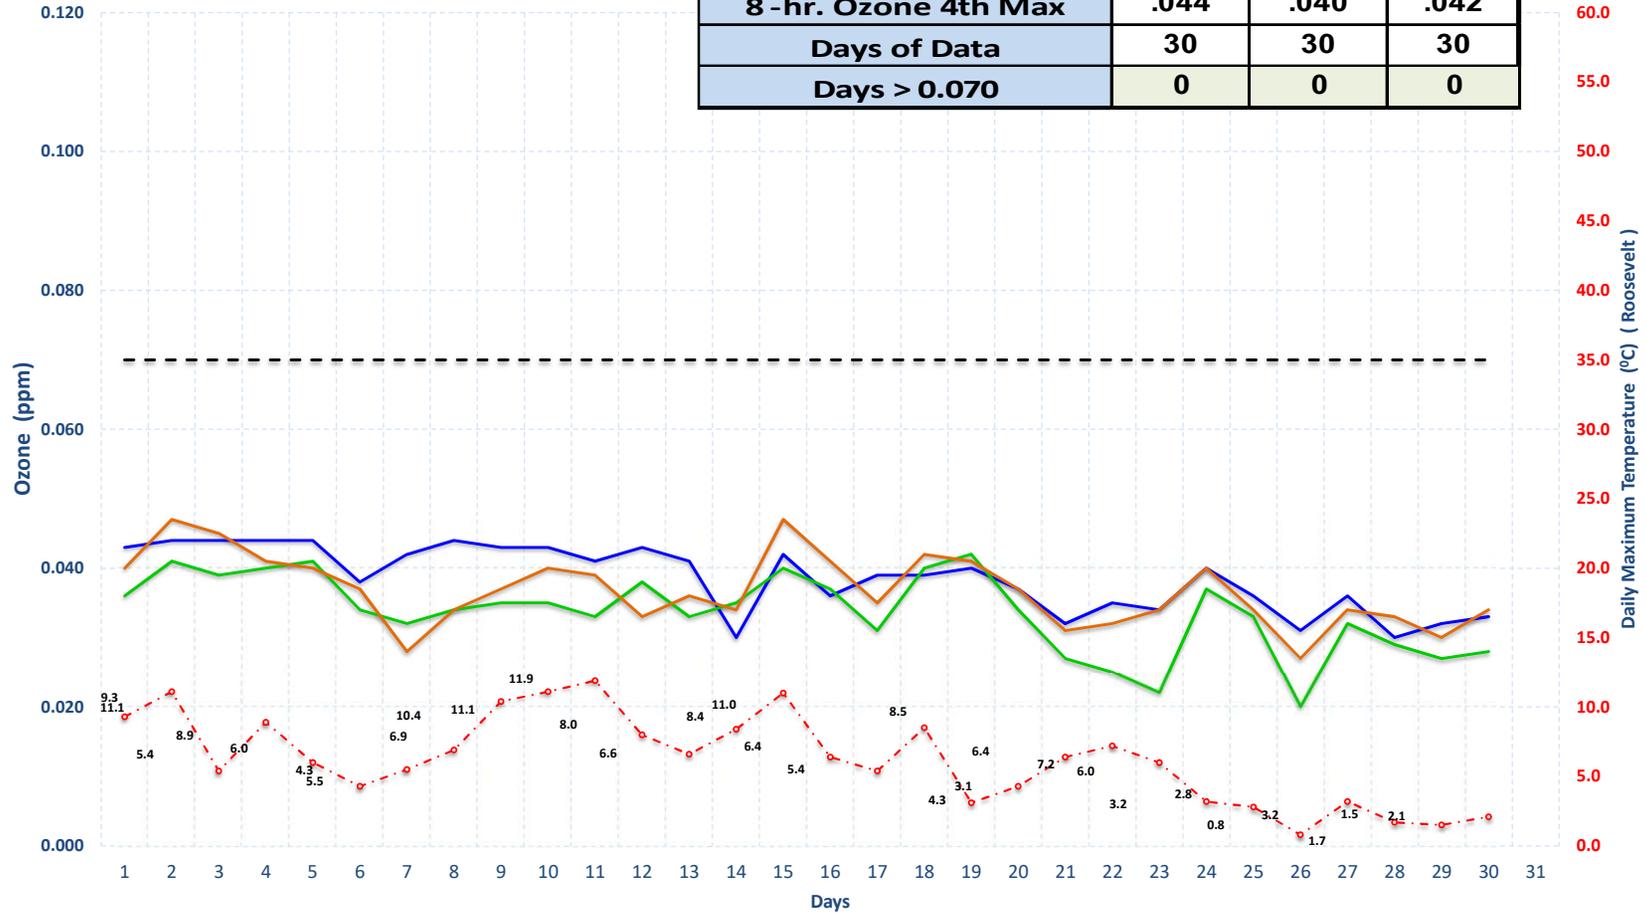


## Highest 8-hr Ozone Concentration and Daily Maximum Temperature November 2024

	<b>SM</b>
<b>Arith Mean</b>	<b>.032</b>
<b>8-hr. Ozone 4th Max</b>	<b>.038</b>
<b>Days of Data</b>	<b>30</b>
<b>Days &gt; 0.070</b>	<b>0</b>

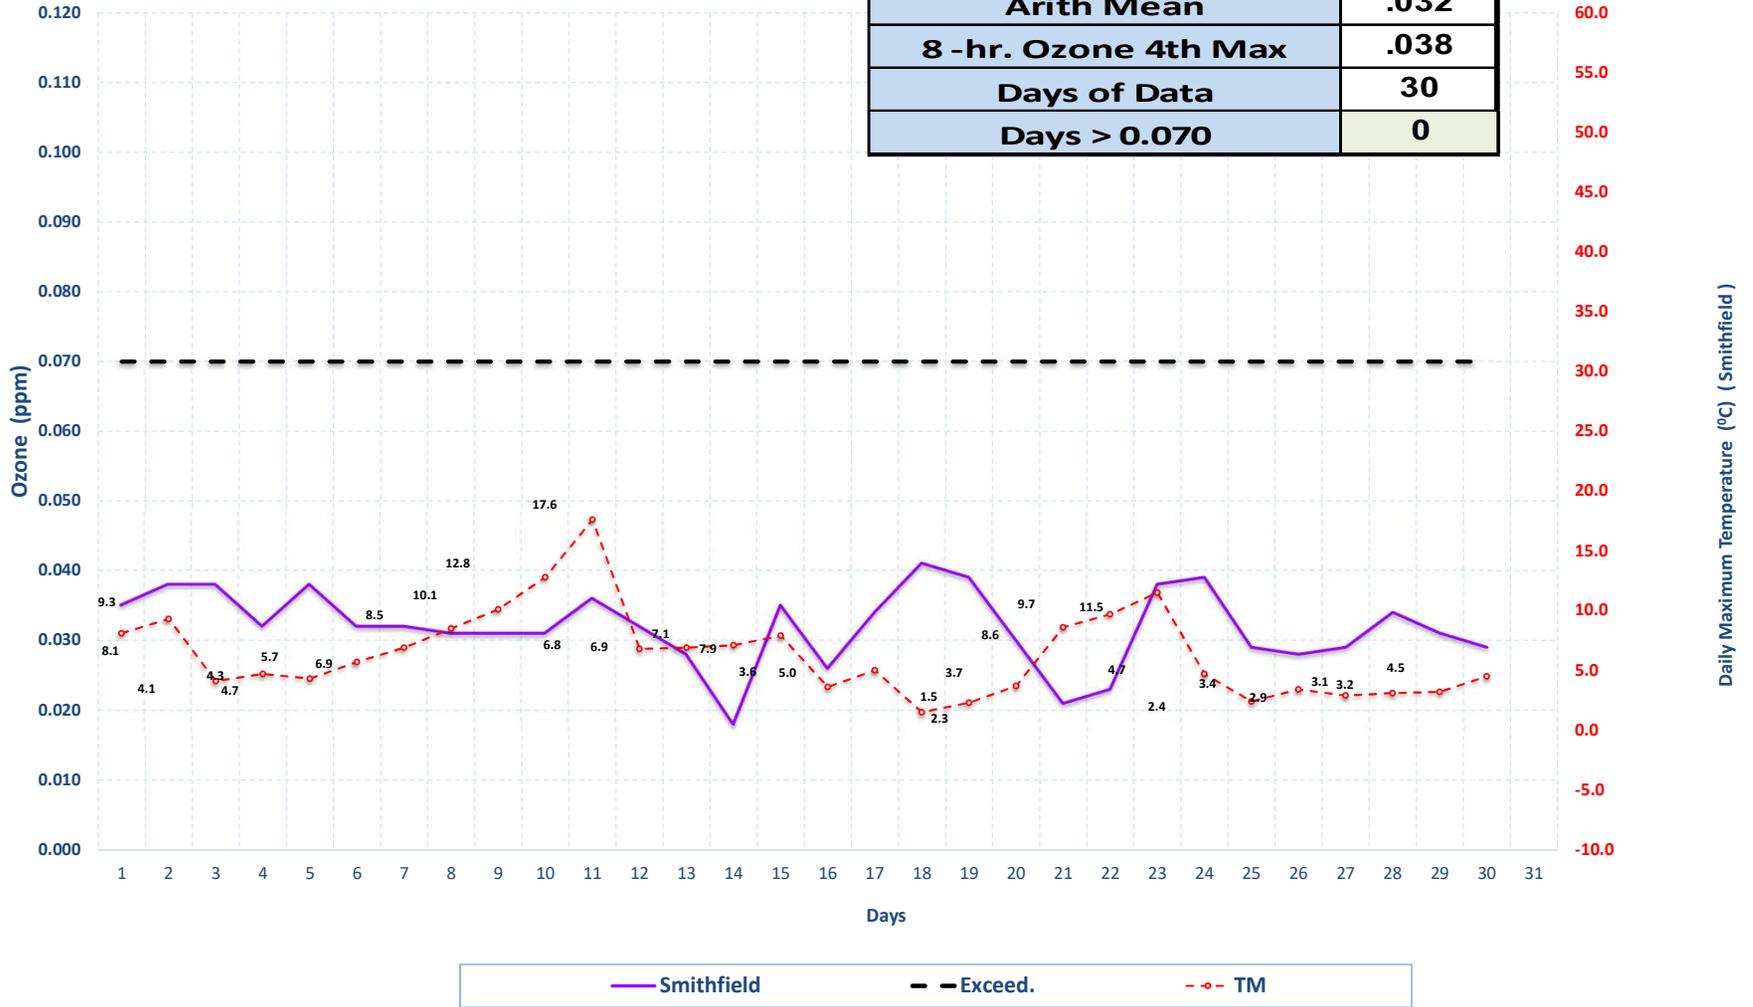


## Highest 8-hr Ozone Concentration and Daily Maximum Temperature November 2024

	LN	SF
<b>Arith Mean</b>	<b>.033</b>	<b>.034</b>
<b>8 -hr. Ozone 4th Max</b>	<b>.040</b>	<b>.037</b>
<b>Days of Data</b>	<b>30</b>	<b>30</b>
<b>Days &gt; 0.070</b>	<b>0</b>	<b>0</b>

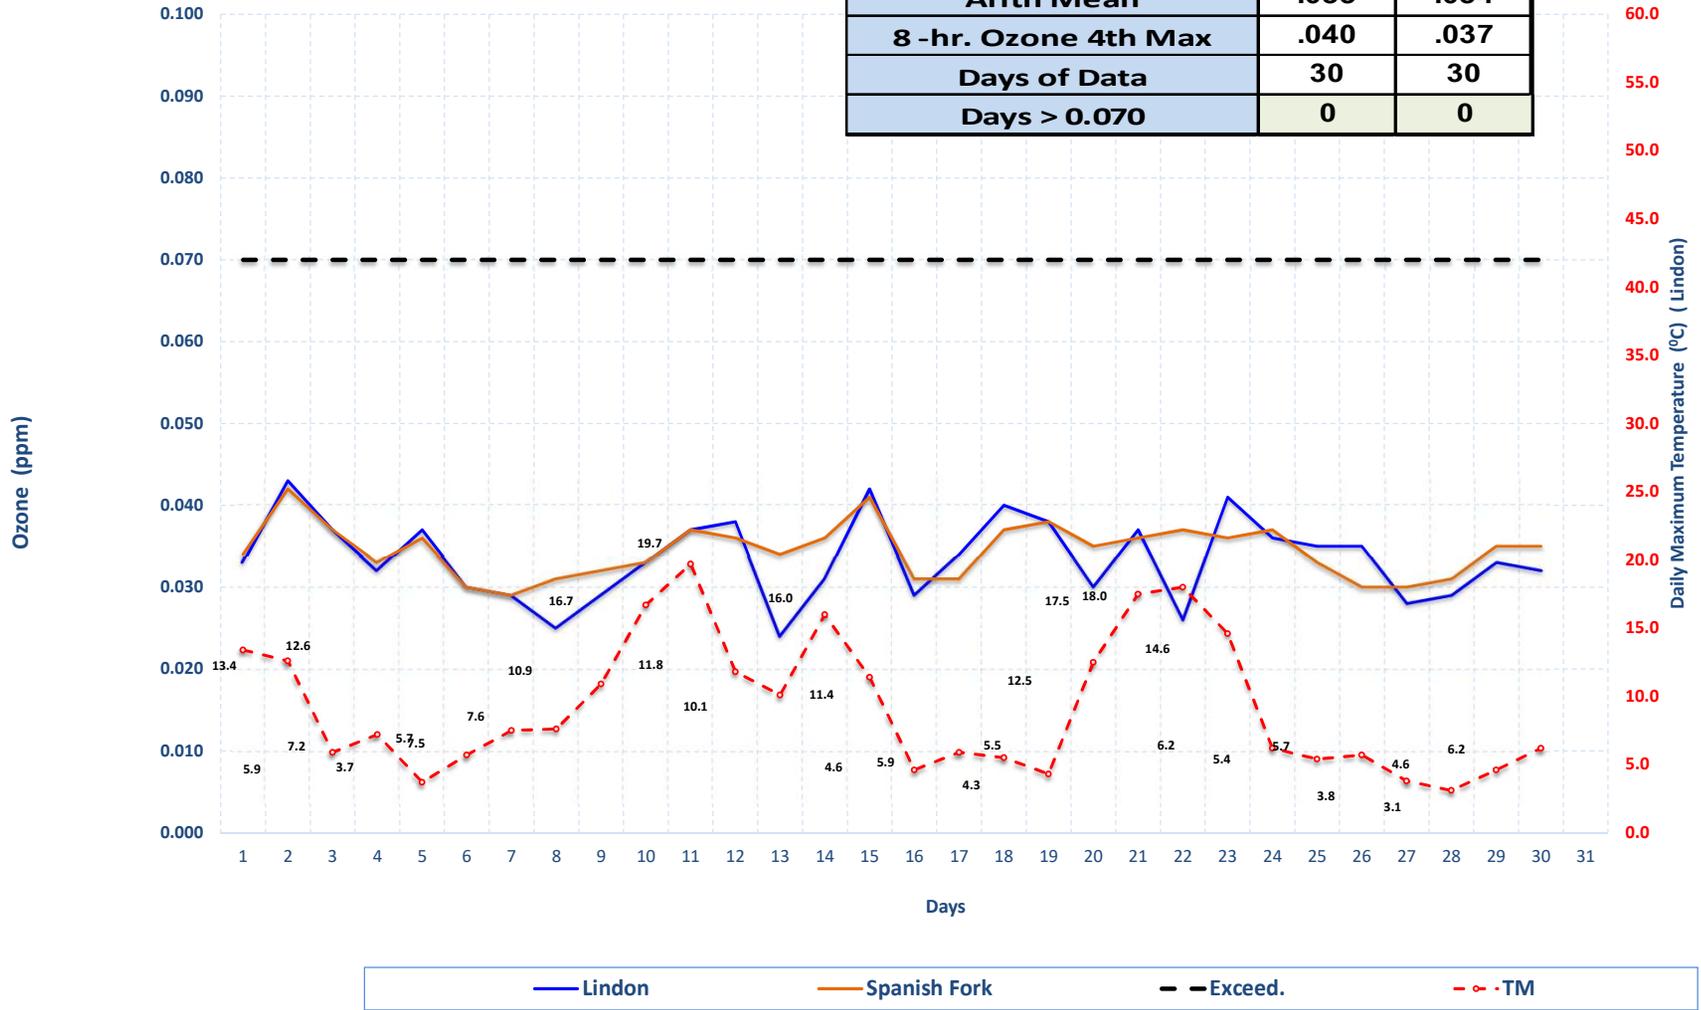


## Highest 8-hr Ozone Concentration and Daily Maximum Temperature November 2024

	EN	HC	M7
<b>Arith Mean</b>	<b>.038</b>	<b>.038</b>	<b>.036</b>
<b>8-hr. Ozone 4th Max</b>	<b>.045</b>	<b>.042</b>	<b>.044</b>
<b>Days of Data</b>	<b>30</b>	<b>30</b>	<b>28</b>
<b>Days &gt; 0.070</b>	<b>0</b>	<b>0</b>	<b>0</b>

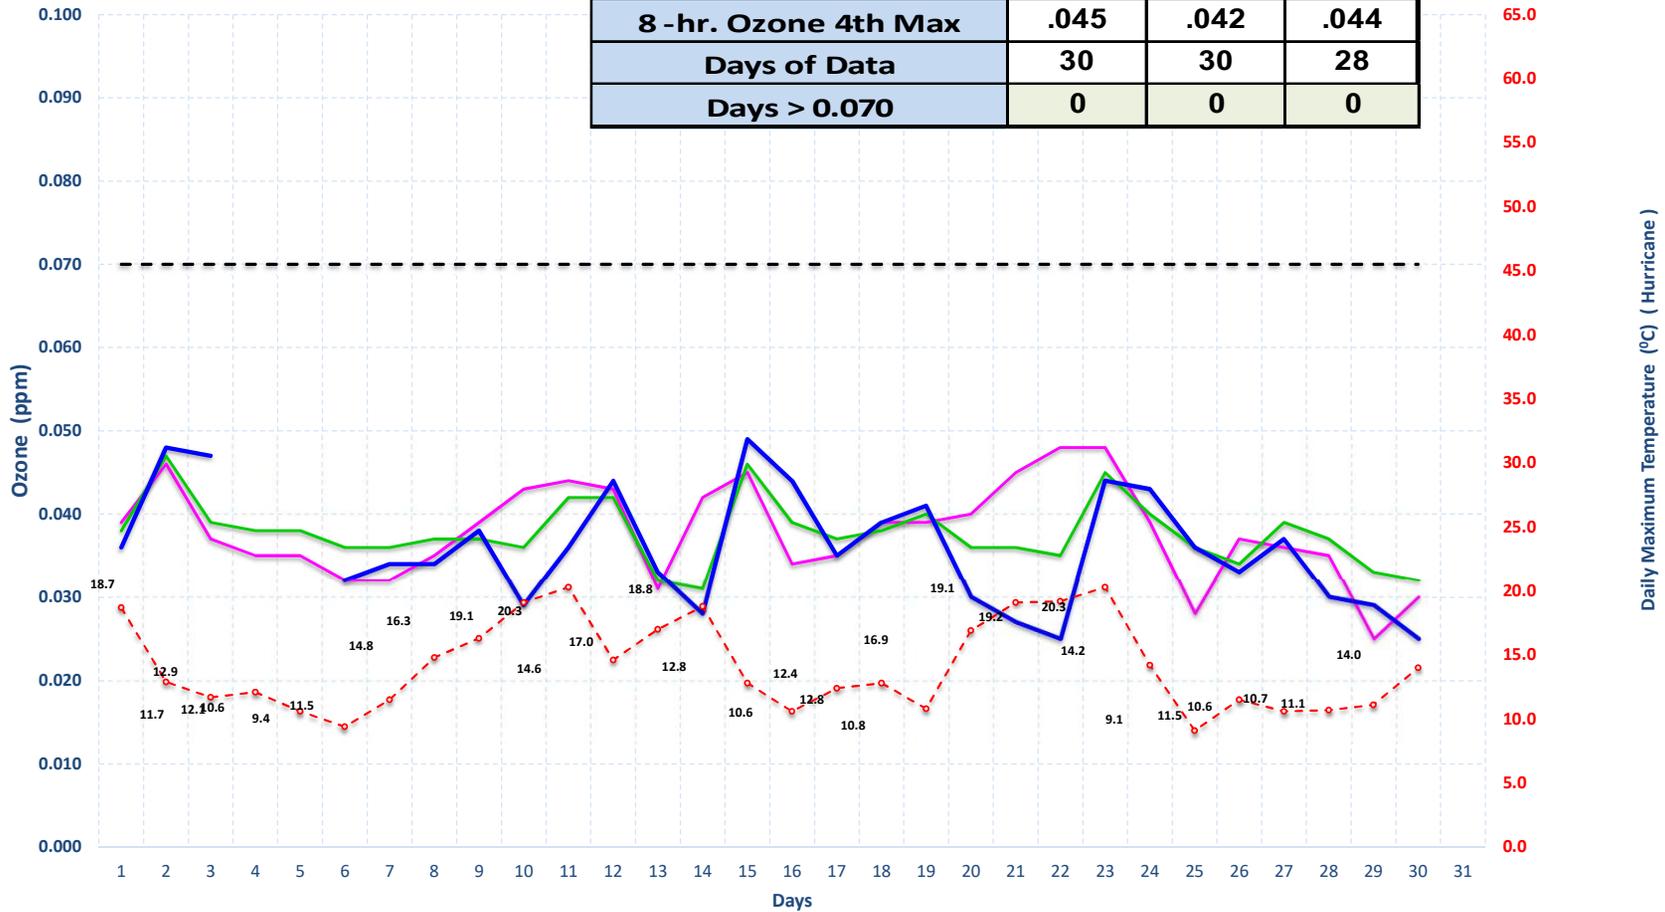

## Highest 8-hr Ozone Concentration and Daily Maximum Temperature November 2024 Stations Monitoring the Inland Port Development


	ZZ	LP
<b>Arith Mean</b>	<b>.033</b>	<b>.035</b>
<b>8-hr. Ozone 4th Max</b>	<b>.039</b>	<b>.041</b>
<b>Days of Data</b>	<b>30</b>	<b>30</b>
<b>Days &gt; 0.070</b>	<b>0</b>	<b>0</b>

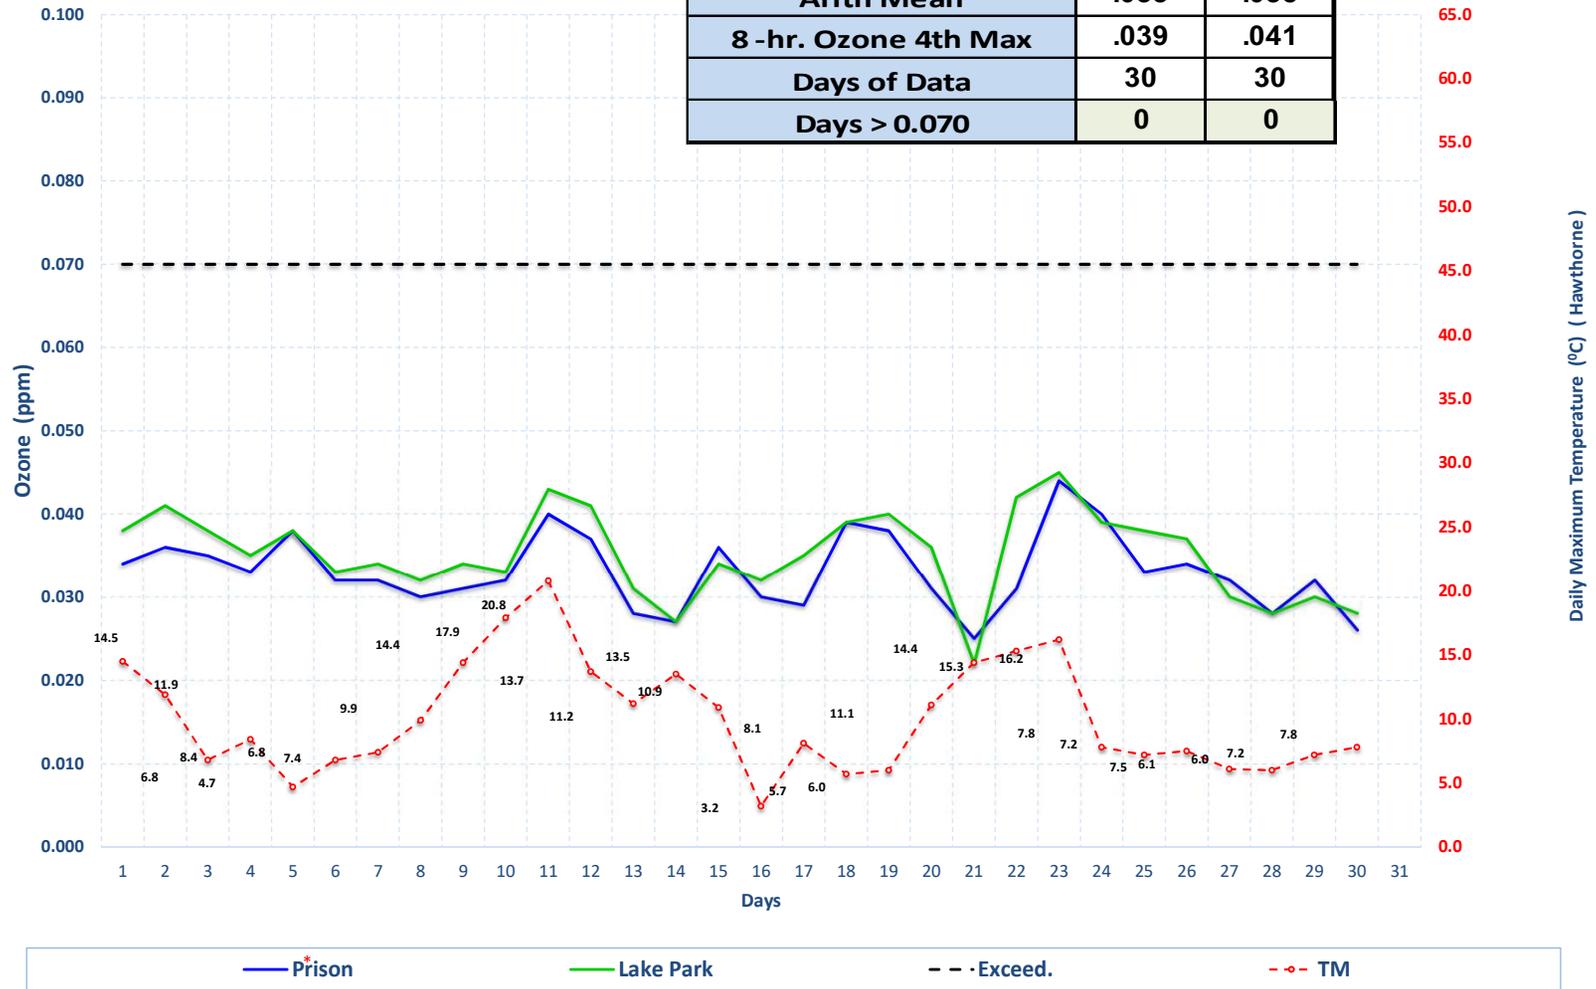

\* ZZ is located at the New Utah State Prison (1480 North 8000 West, SLC).  
This site was previously named IP


## Highest 8-hr Ozone Concentration and Daily Maximum Temperature November 2024

	<b>BG</b>
<b>Arith Mean</b>	<b>.030</b>
<b>8-hr. Ozone 4th Max</b>	<b>.037</b>
<b>Days of Data</b>	<b>30</b>
<b>Days &gt; 0.070</b>	<b>0</b>

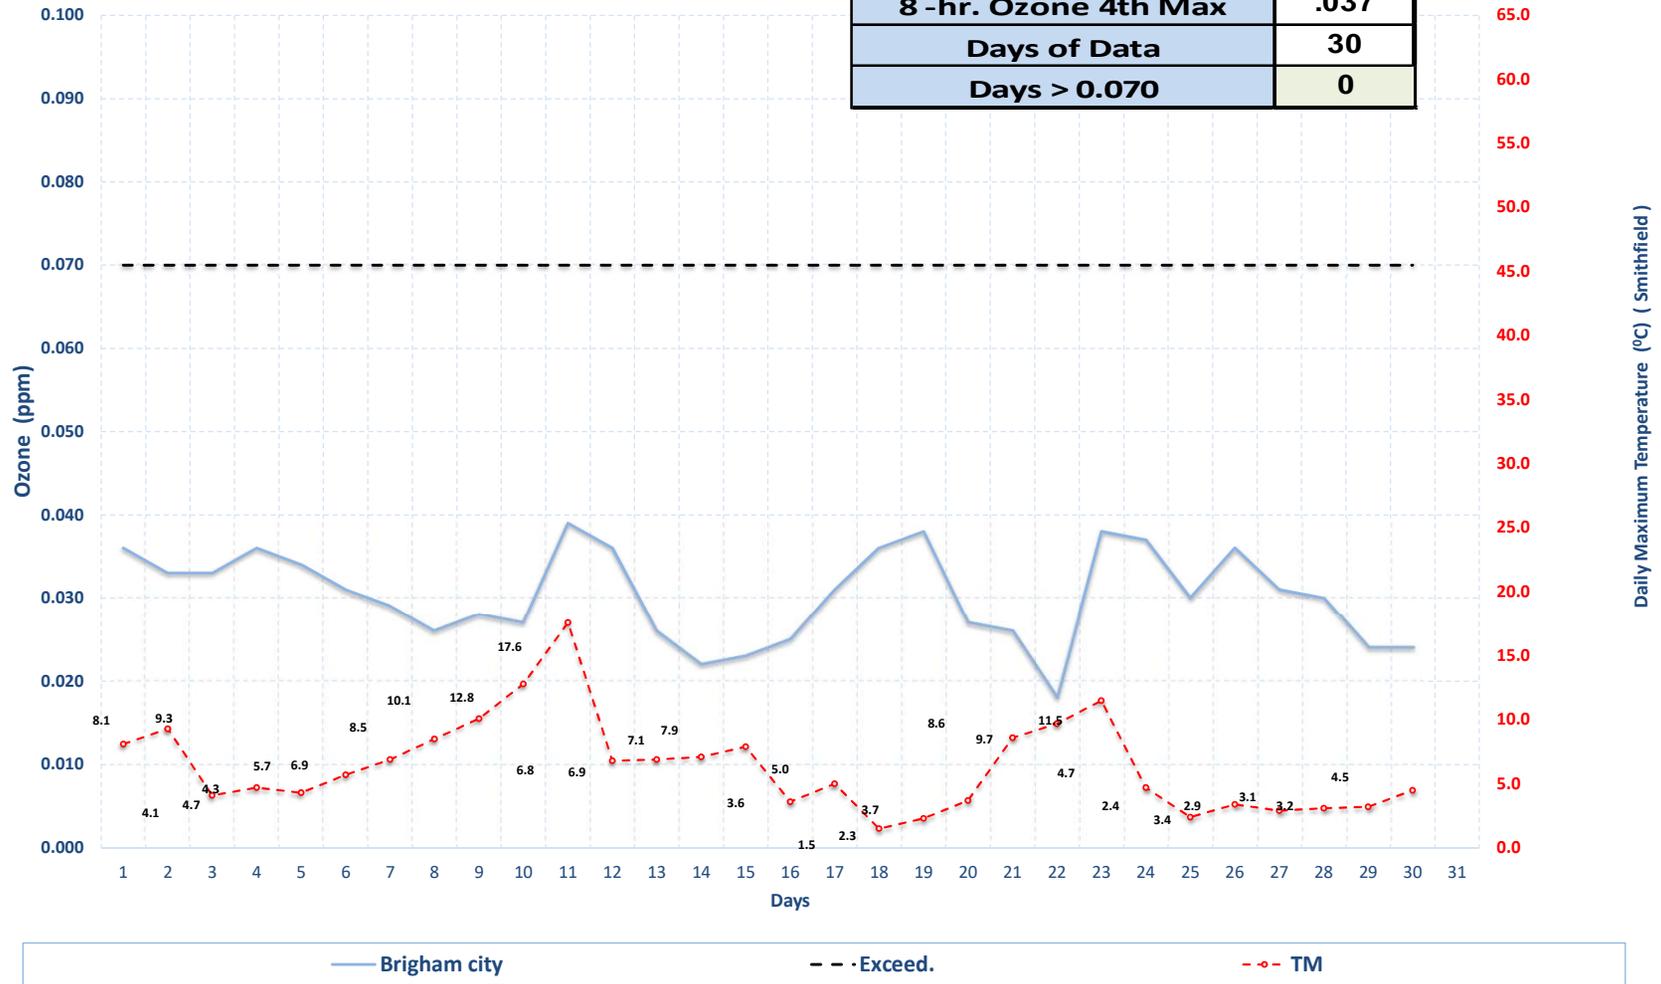

## Highest 8-hr Ozone Concentration and Daily Maximum Temperature December 2024

O3 DEC 2024	BV	CV	ED	H3	HV	HW	NR	RB	RP	EQ
Arith Mean	.021	.024	.028	.029	.022	.020	.019	.032	.022	.021
8 -hr. Ozone 4th Max	.036	.036	.038	.038	.035	.033	.031	.040	.034	.032
Days of Data	31	31	31	31	31	31	31	31	31	31
Days > 0.070	0	0	0	0	0	0	0	0	0	0

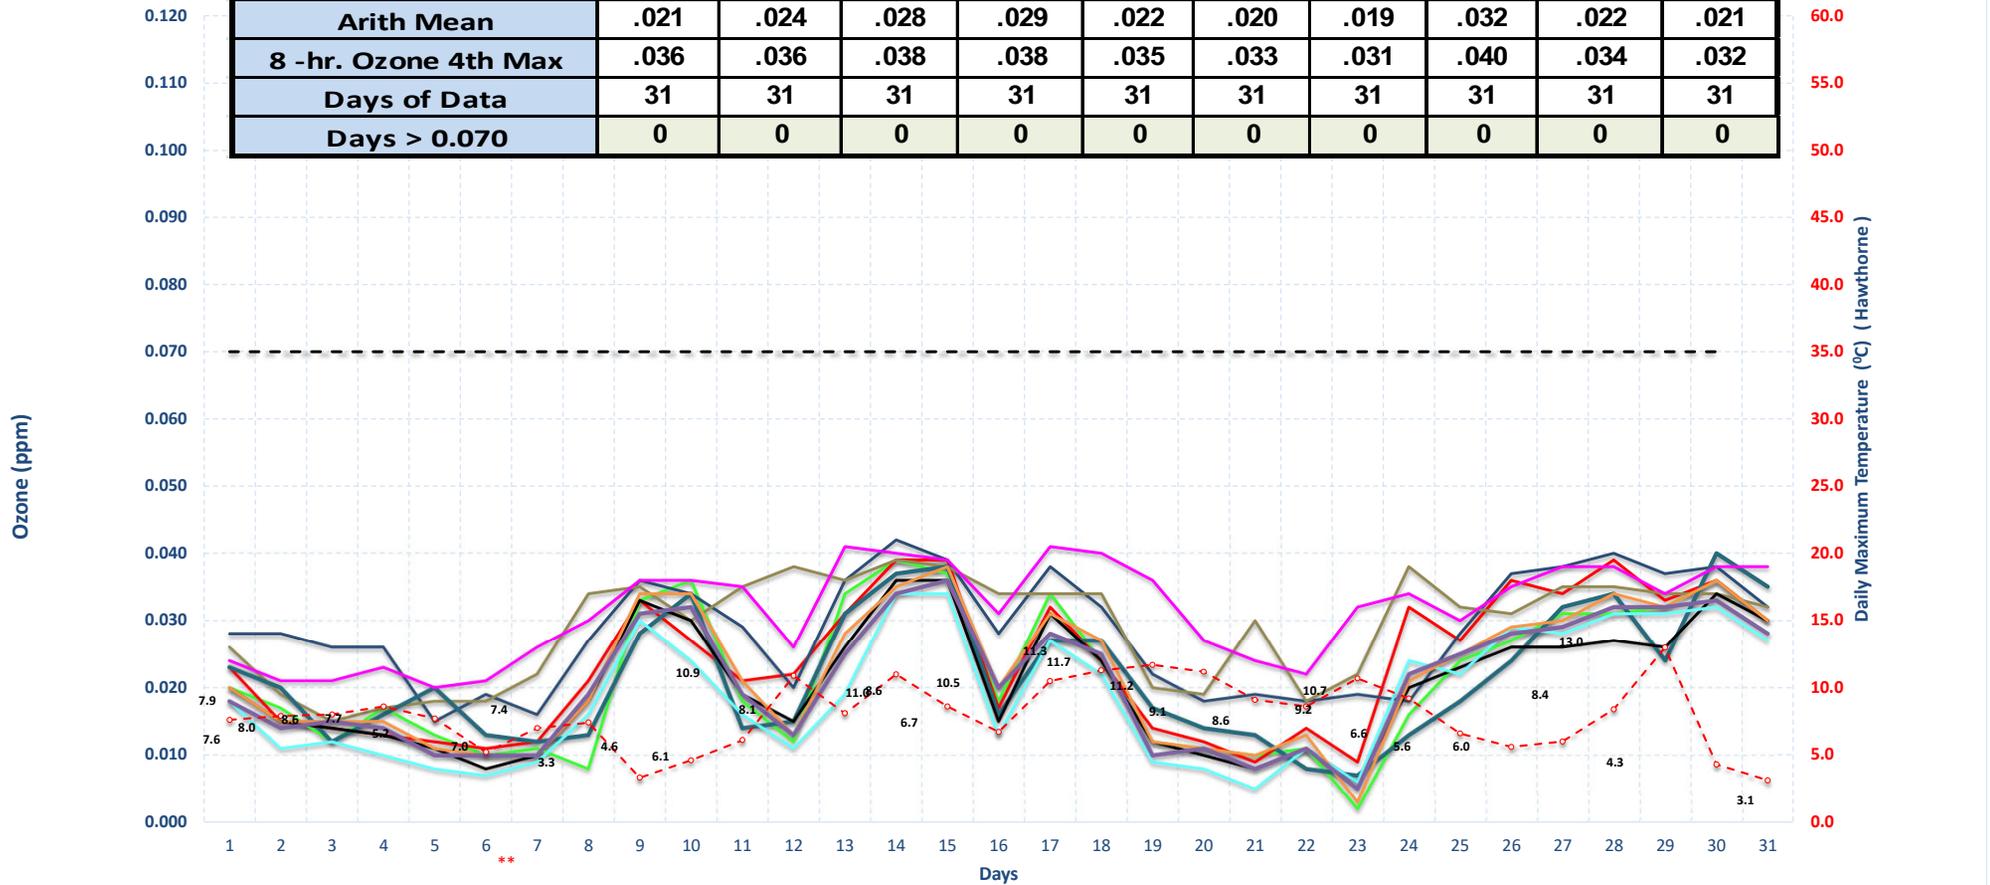


— Bountiful 
 — Copperview 
 — Erda 
 — Herriman #3 
 — HV 
 — Hawthorne 
 — Near Road 
 — Red Butte 
 — Rose Park 
 — Environmental Quality 
 - - .Exceed. 
 - - TM

\* Environmental Quality (EQ) previously named Technical Support Center (TSC)

\*\* Controlling Monitor


## Highest 8-hr Ozone Concentration and Daily Maximum Temperature December 2024

	P2	RS	V4
<b>Arith Mean</b>	<b>.030</b>	<b>.029</b>	<b>.032</b>
<b>8 -hr. Ozone 4th Max</b>	<b>.036</b>	<b>.037</b>	<b>.038</b>
<b>Days of Data</b>	<b>31</b>	<b>31</b>	<b>31</b>
<b>Days &gt; 0.070</b>	<b>0</b>	<b>0</b>	<b>0</b>

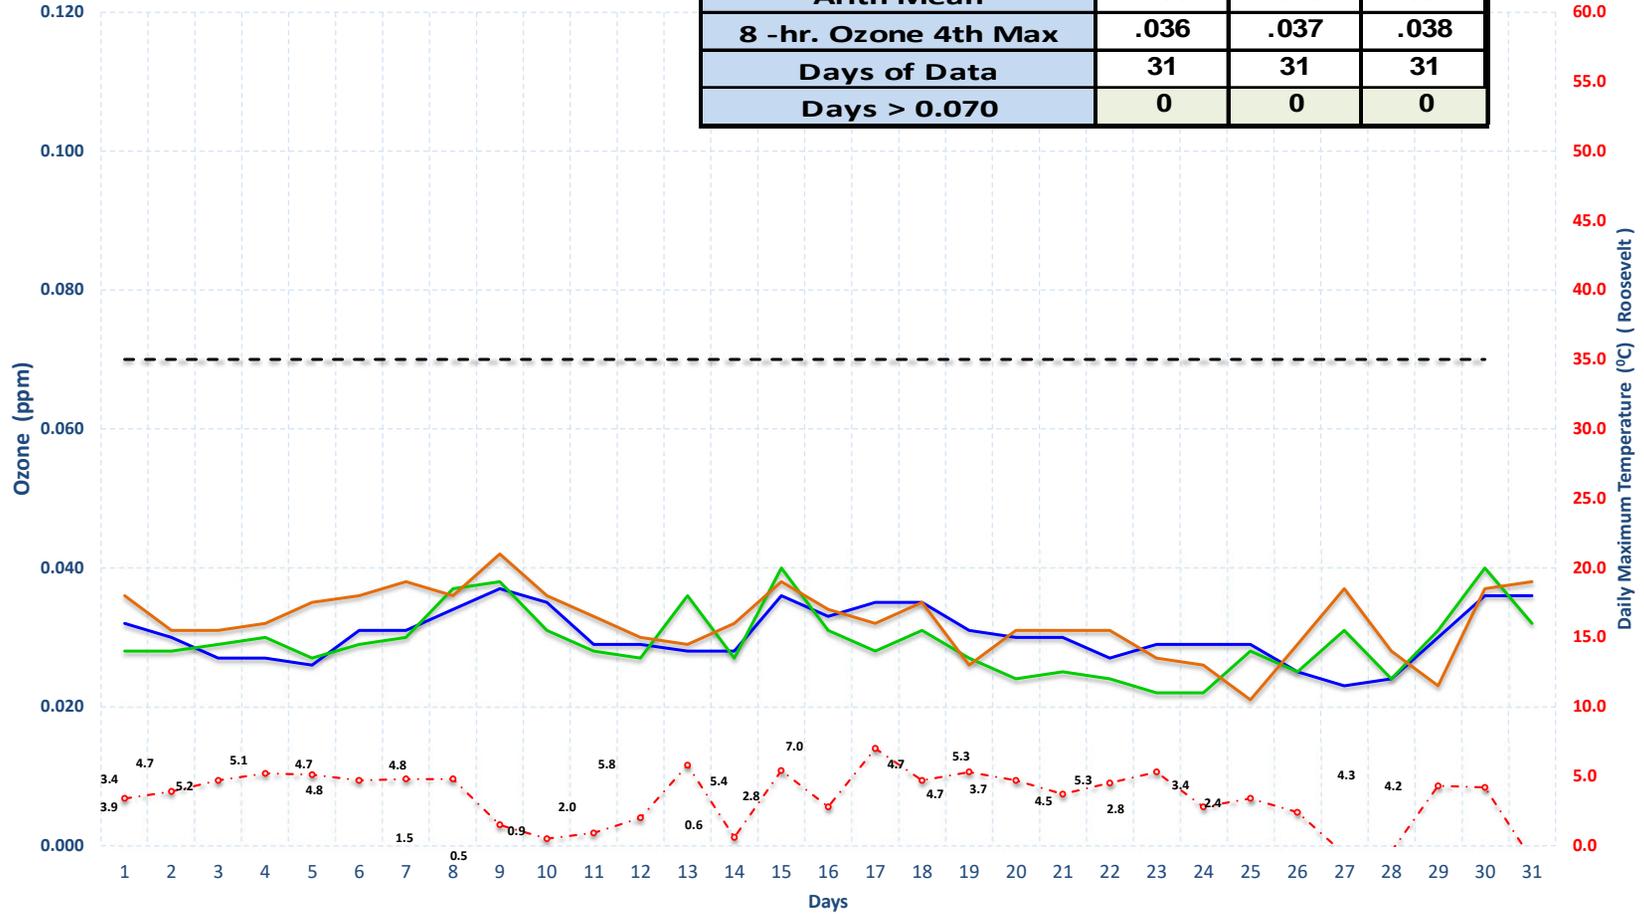


## Highest 8-hr Ozone Concentration and Daily Maximum Temperature December 2024

	<b>SM</b>
<b>Arith Mean</b>	<b>.028</b>
<b>8 -hr. Ozone 4th Max</b>	<b>.038</b>
<b>Days of Data</b>	<b>31</b>
<b>Days &gt; 0.070</b>	<b>0</b>

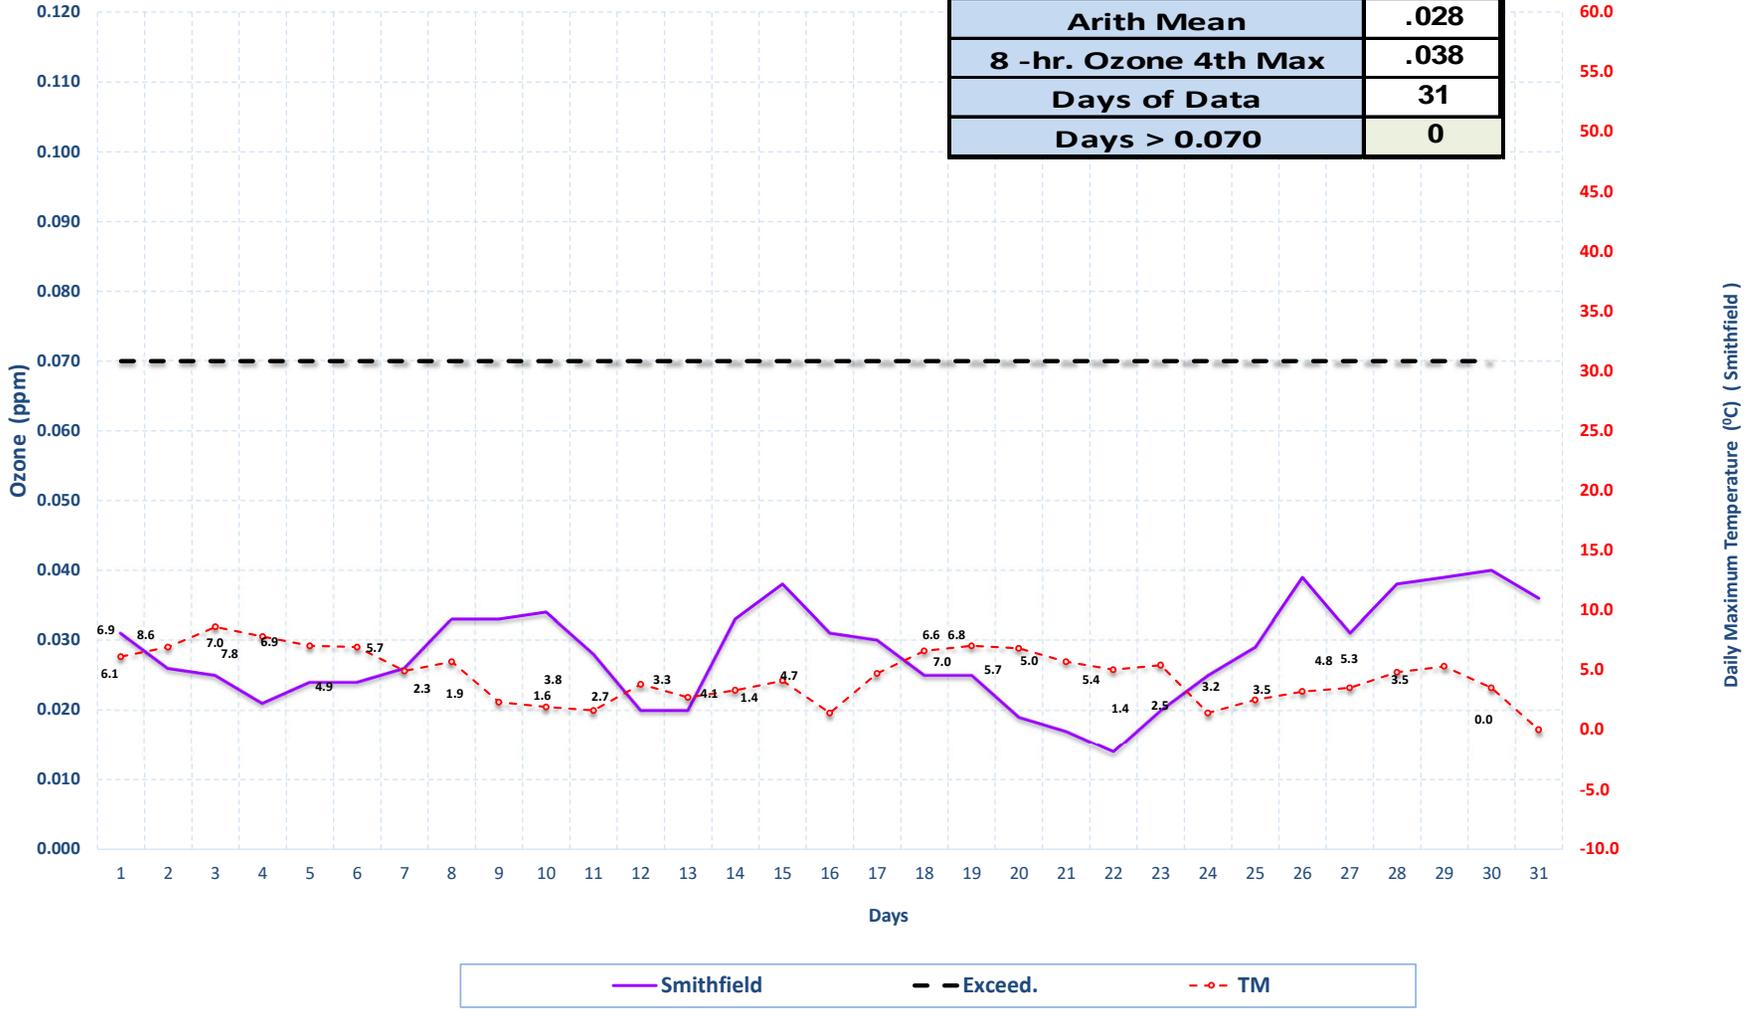


## Highest 8-hr Ozone Concentration and Daily Maximum Temperature December 2024

	LN	SF
<b>Arith Mean</b>	<b>.027</b>	<b>.028</b>
<b>8 -hr. Ozone 4th Max</b>	<b>.038</b>	<b>.037</b>
<b>Days of Data</b>	<b>31</b>	<b>31</b>
<b>Days &gt; 0.070</b>	<b>0</b>	<b>0</b>

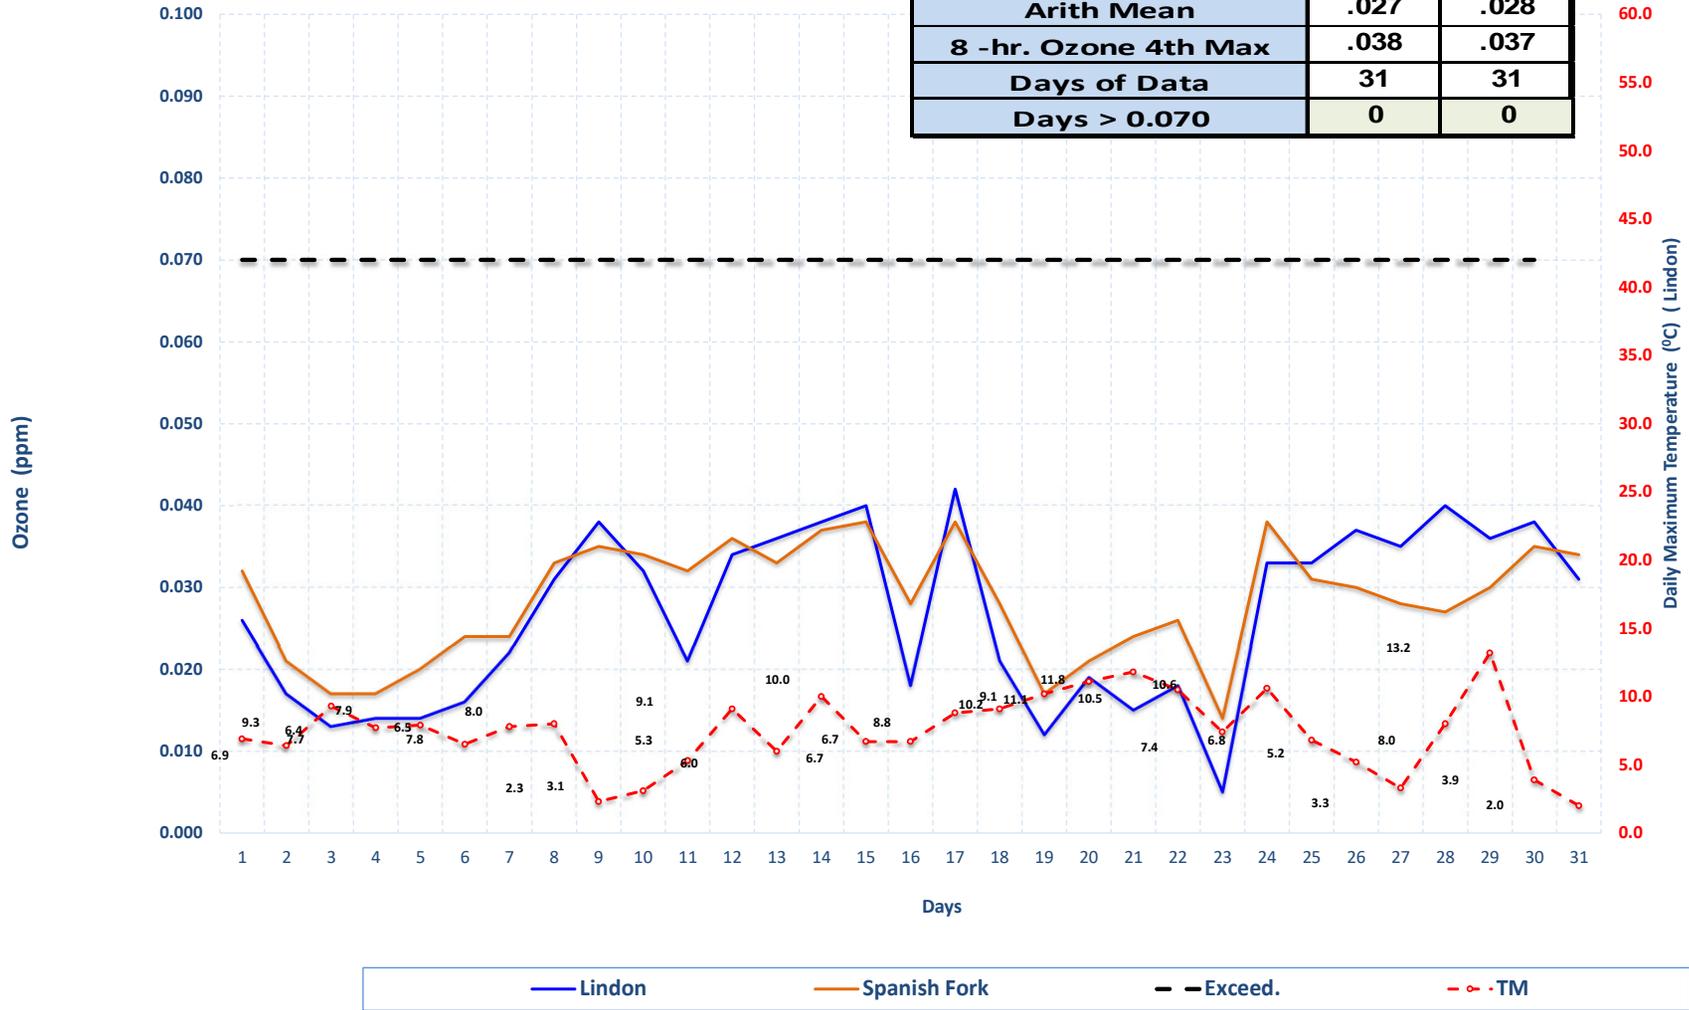


## Highest 8-hr Ozone Concentration and Daily Maximum Temperature December 2024

	EN	HC	M7
<b>Arith Mean</b>	<b>.033</b>	<b>.032</b>	<b>.026</b>
<b>8 -hr. Ozone 4th Max</b>	<b>.040</b>	<b>.039</b>	<b>.035</b>
<b>Days of Data</b>	<b>31</b>	<b>31</b>	<b>31</b>
<b>Days &gt; 0.070</b>	<b>0</b>	<b>0</b>	<b>0</b>

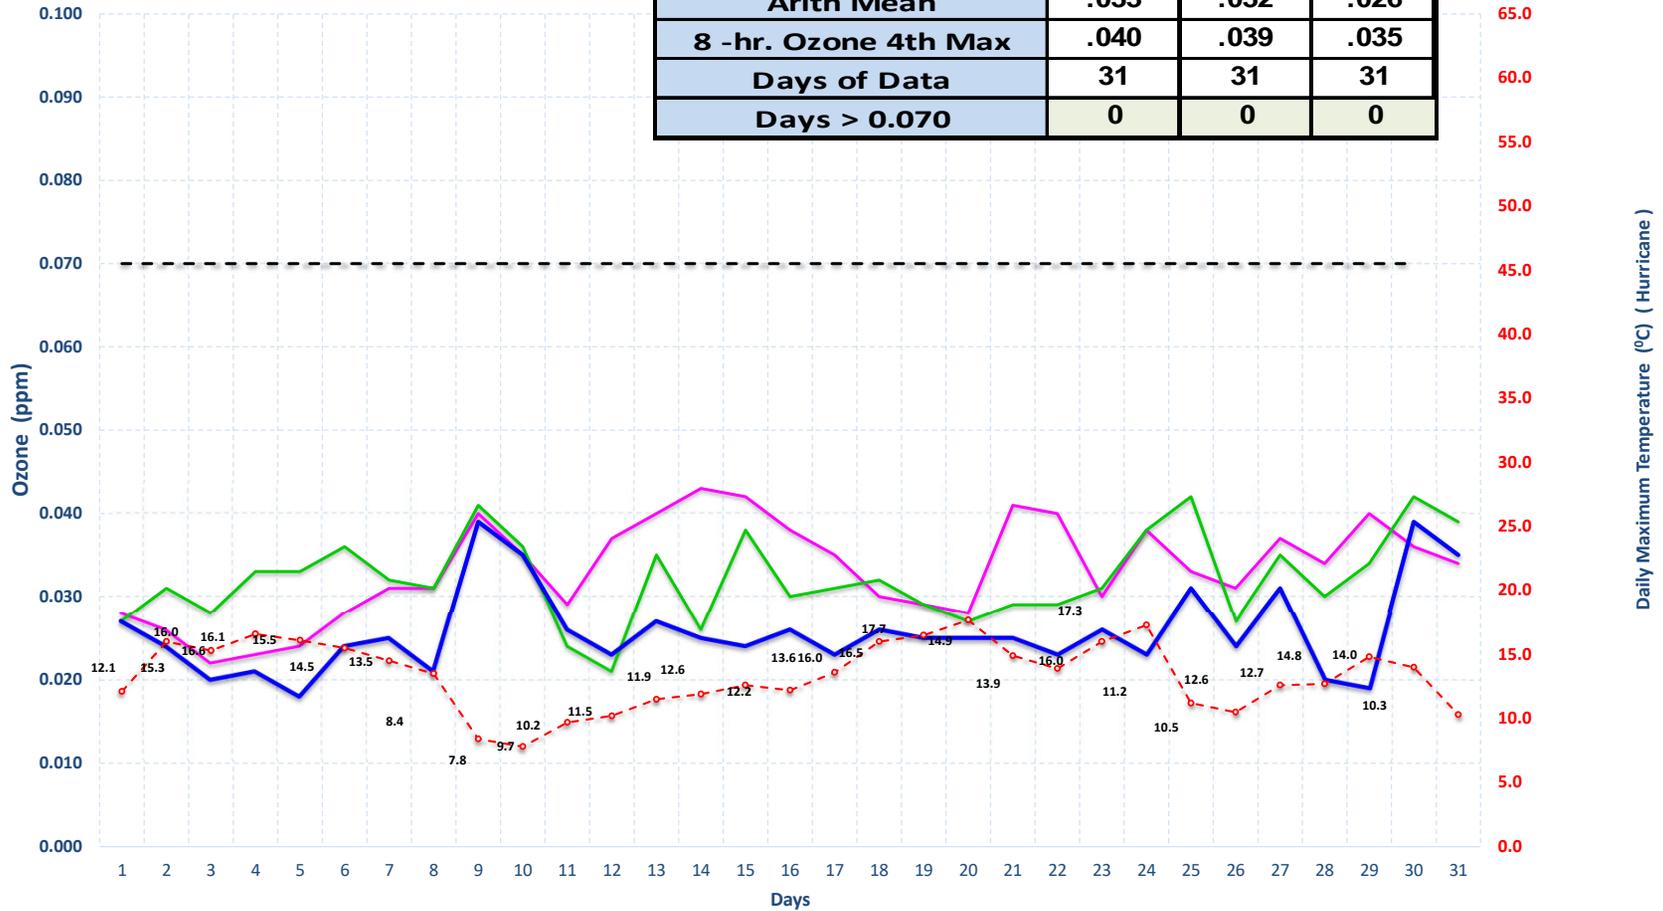

## Highest 8-hr Ozone Concentration and Daily Maximum Temperature December 2024 Stations Monitoring the Inland Port Development


	ZZ	LP
<b>Arith Mean</b>	<b>.028</b>	<b>.024</b>
<b>8 -hr. Ozone 4th Max</b>	<b>.039</b>	<b>.038</b>
<b>Days of Data</b>	<b>31</b>	<b>31</b>
<b>Days &gt; 0.070</b>	<b>0</b>	<b>0</b>

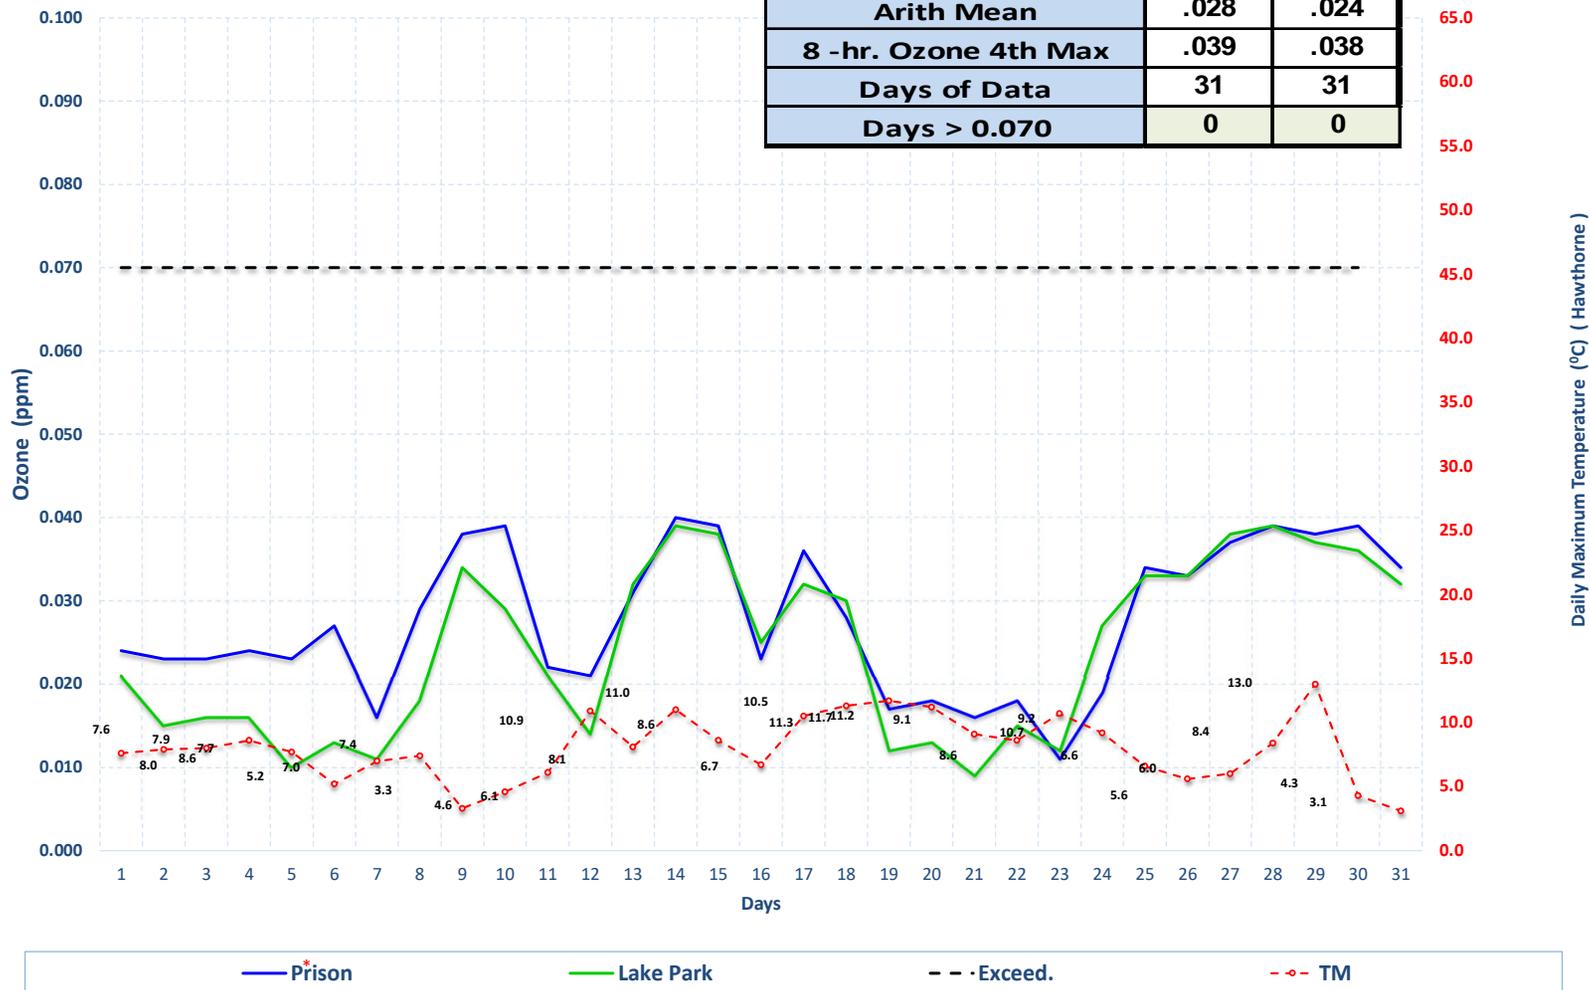

\* ZZ is located at the New Utah State Prison (1480 North 8000 West, SLC).  
This site was previously named IP

## Highest 8-hr Ozone Concentration and Daily Maximum Temperature December 2024


	<b>BG</b>
<b>Arith Mean</b>	<b>.024</b>
<b>8 -hr. Ozone 4th Max</b>	<b>.038</b>
<b>Days of Data</b>	<b>31</b>
<b>Days &gt; 0.070</b>	<b>0</b>

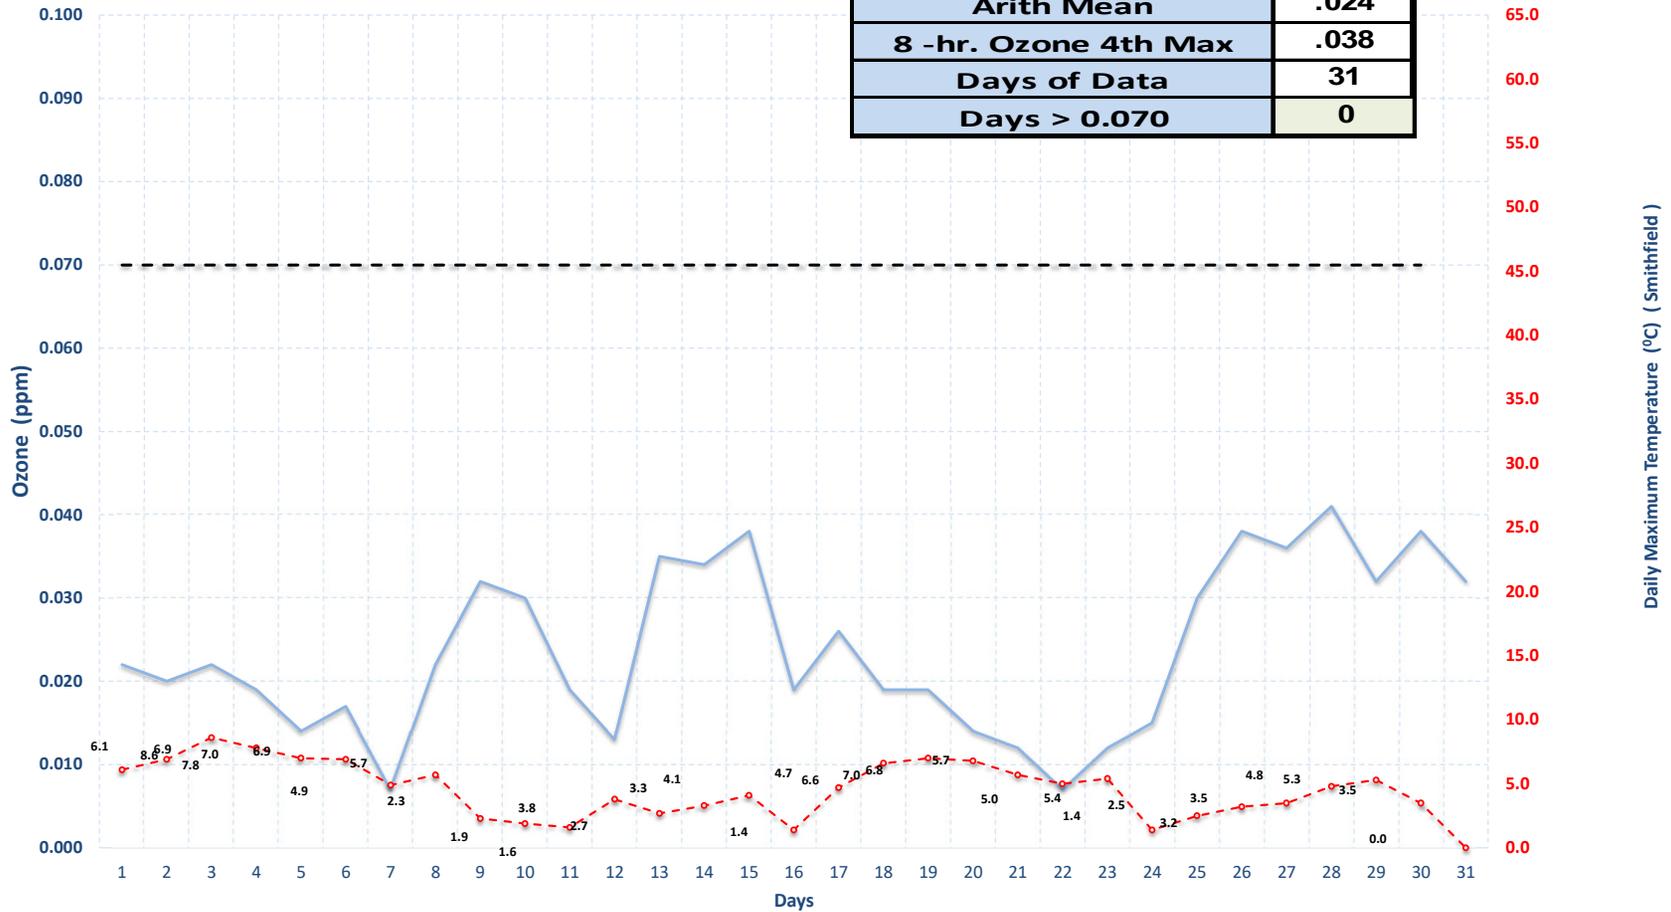

— Brigham city      - - - Exceed.      - - - TM

## Highest 8-hr Ozone Concentration and Daily Maximum Temperature January 2025

O3 JAN 2024	BV	CV	ED	H3	HV	HW	NR	RB	RP	EQ
Arith Mean	.032	.033	.035	.033	.033	.030	.028	.038	.031	.030
8 -hr. Ozone 4th Max	.040	.039	.038	.036	.039	.035	.035	.041	.037	.035
Days of Data	21	21	21	21	21	21	21	21	21	21
Days > 0.070	0	0	0	0	0	0	0	0	0	0

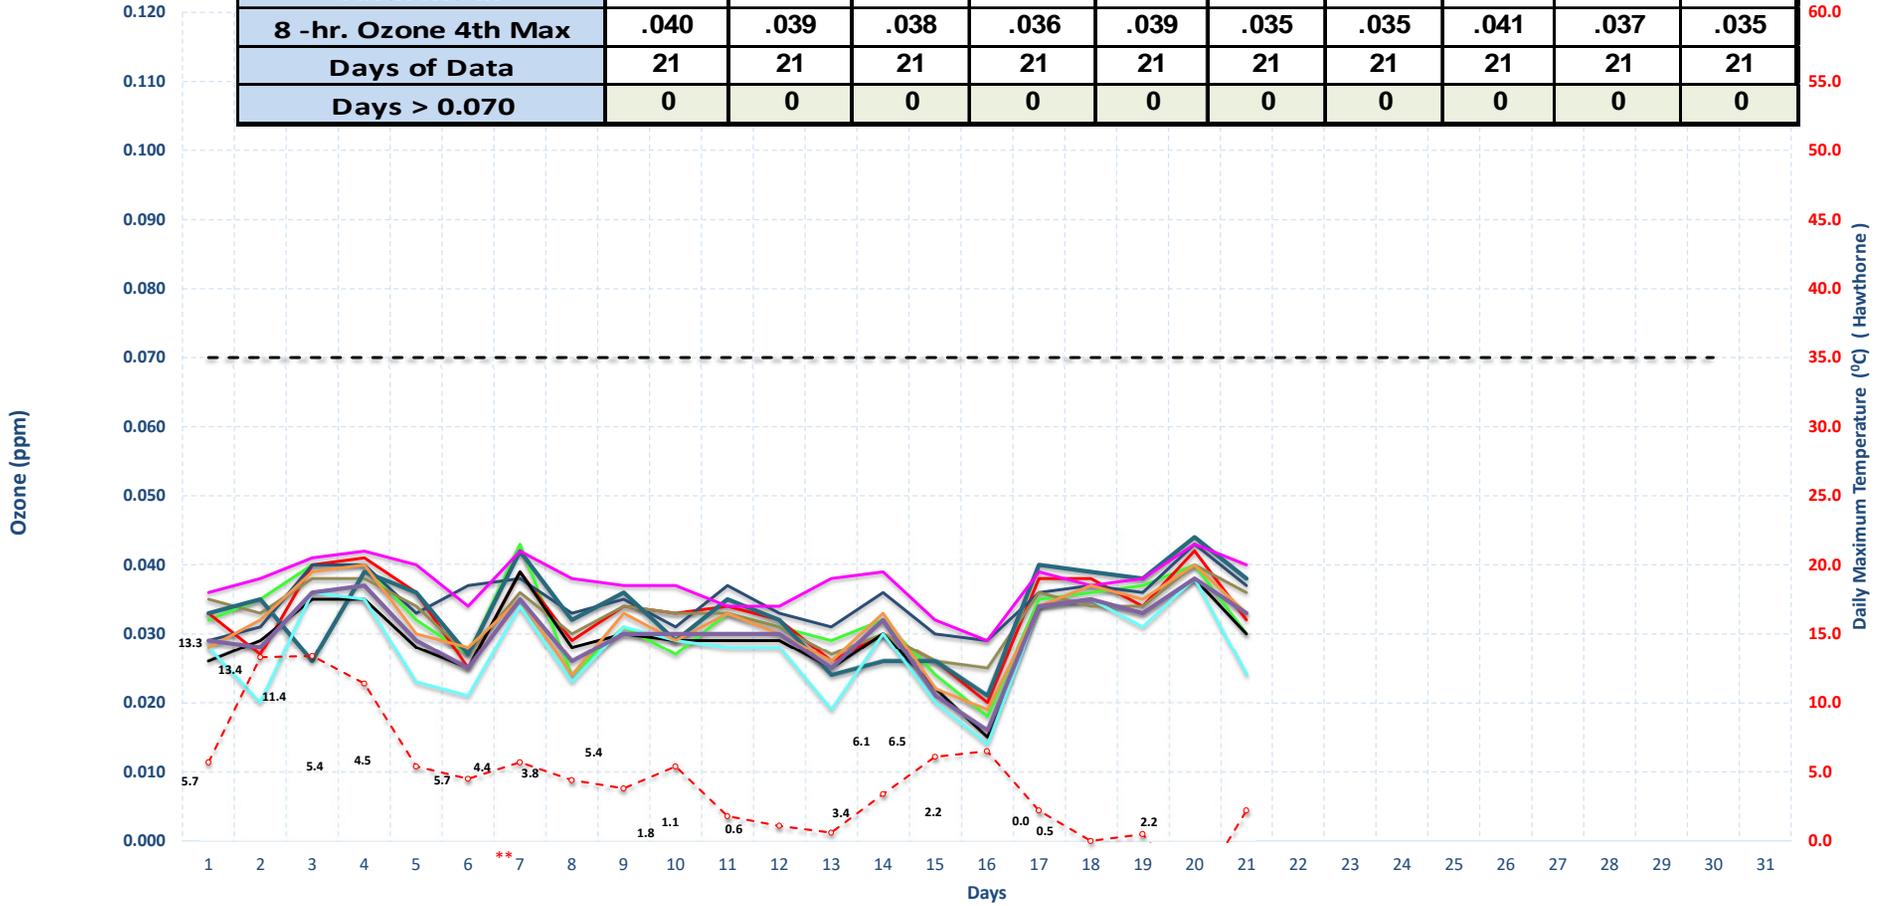


\* Environmental Quality (EQ) previously named Technical Support Center (TSC)

\*\* Controlling Monitor

## Highest 8-hr Ozone Concentration and Daily Maximum Temperature January 2025


	P2	RS	V4
<b>Arith Mean</b>	<b>.033</b>	<b>.033</b>	<b>.036</b>
<b>8 -hr. Ozone 4th Max</b>	<b>.037</b>	<b>.039</b>	<b>.041</b>
<b>Days of Data</b>	<b>21</b>	<b>21</b>	<b>21</b>
<b>Days &gt; 0.070</b>	<b>0</b>	<b>0</b>	<b>0</b>

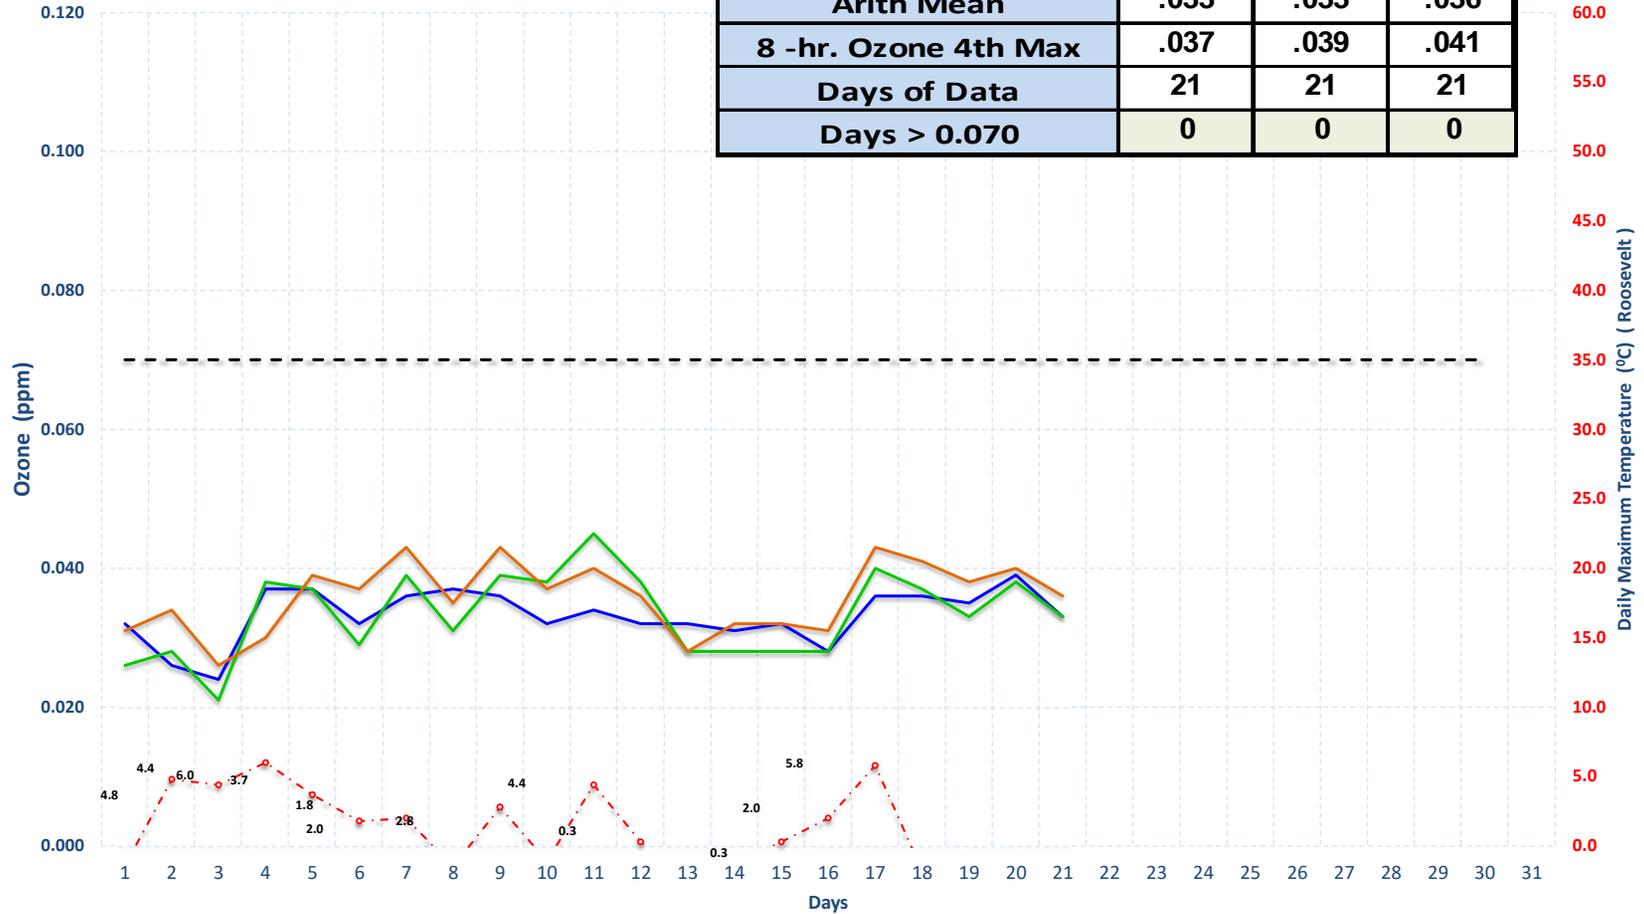

— Price #2     
 — Roosevelt     
 — Vernal     
 - - - Exceed.     
 - - - ○ - - - TM


## Highest 8-hr Ozone Concentration and Daily Maximum Temperature January 2025

	<b>SM</b>
<b>Arith Mean</b>	<b>.034</b>
<b>8 -hr. Ozone 4th Max</b>	<b>.038</b>
<b>Days of Data</b>	<b>21</b>
<b>Days &gt; 0.070</b>	<b>0</b>

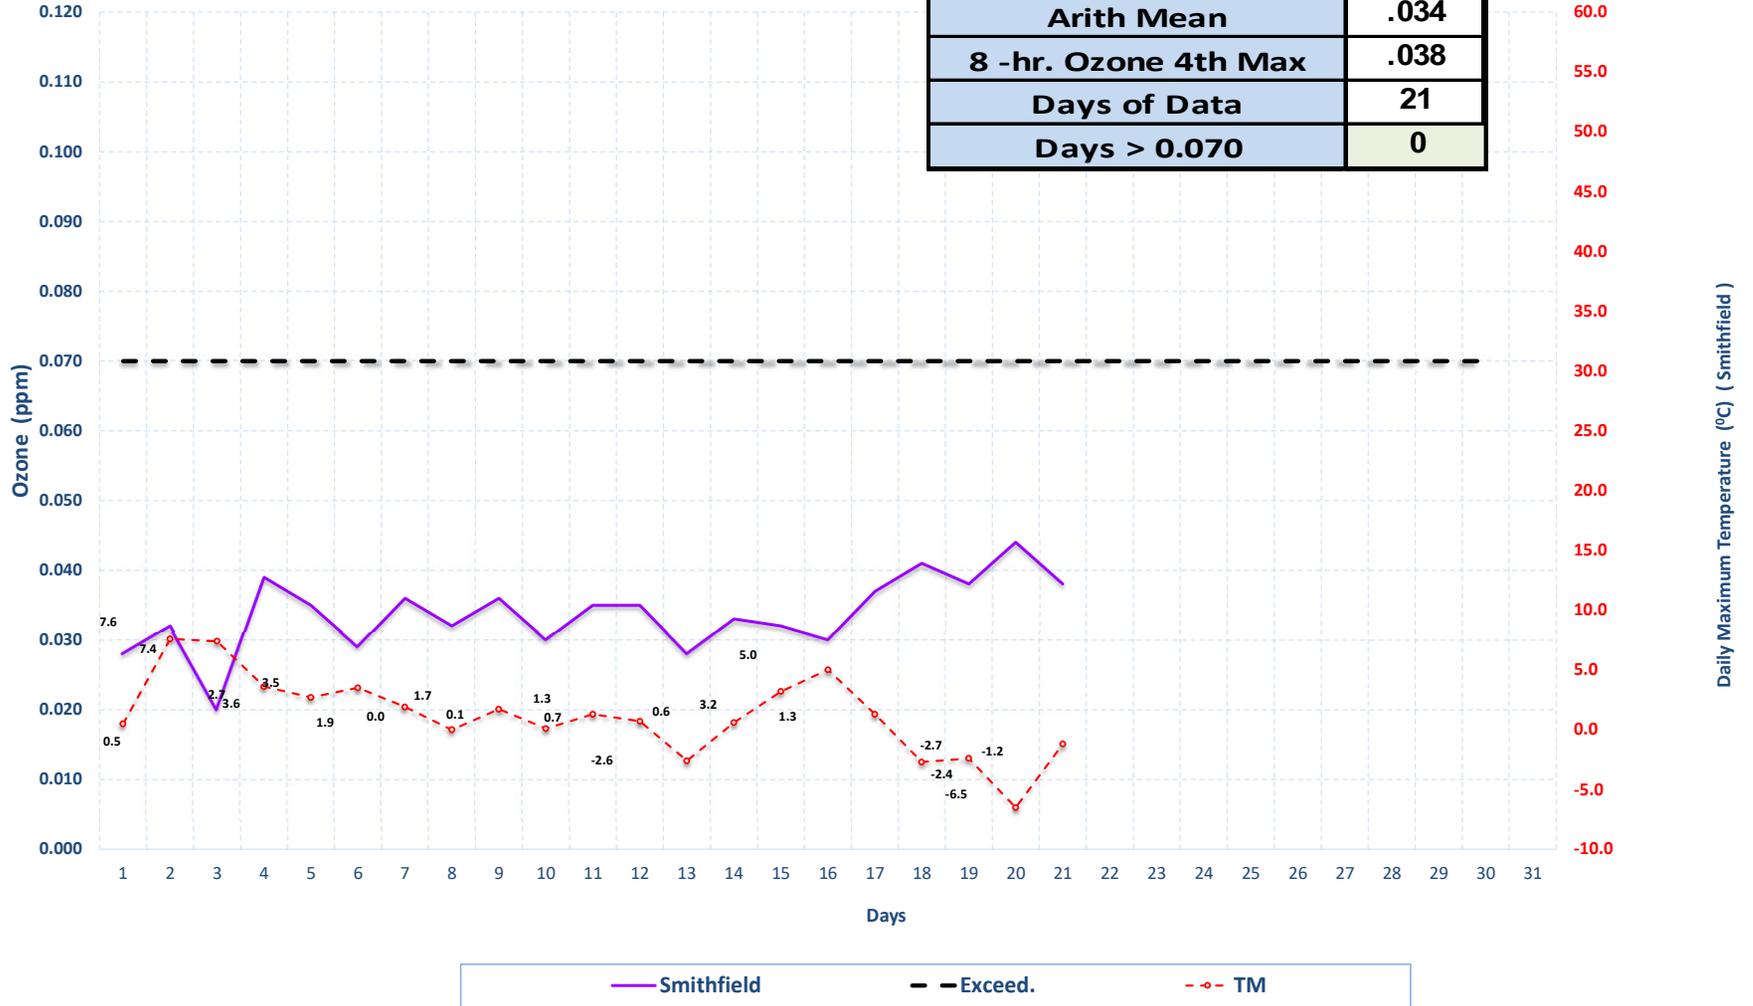


## Highest 8-hr Ozone Concentration and Daily Maximum Temperature January 2025

	LN	SF
<b>Arith Mean</b>	<b>.031</b>	<b>.032</b>
<b>8 -hr. Ozone 4th Max</b>	<b>.037</b>	<b>.036</b>
<b>Days of Data</b>	<b>21</b>	<b>21</b>
<b>Days &gt; 0.070</b>	<b>0</b>	<b>0</b>

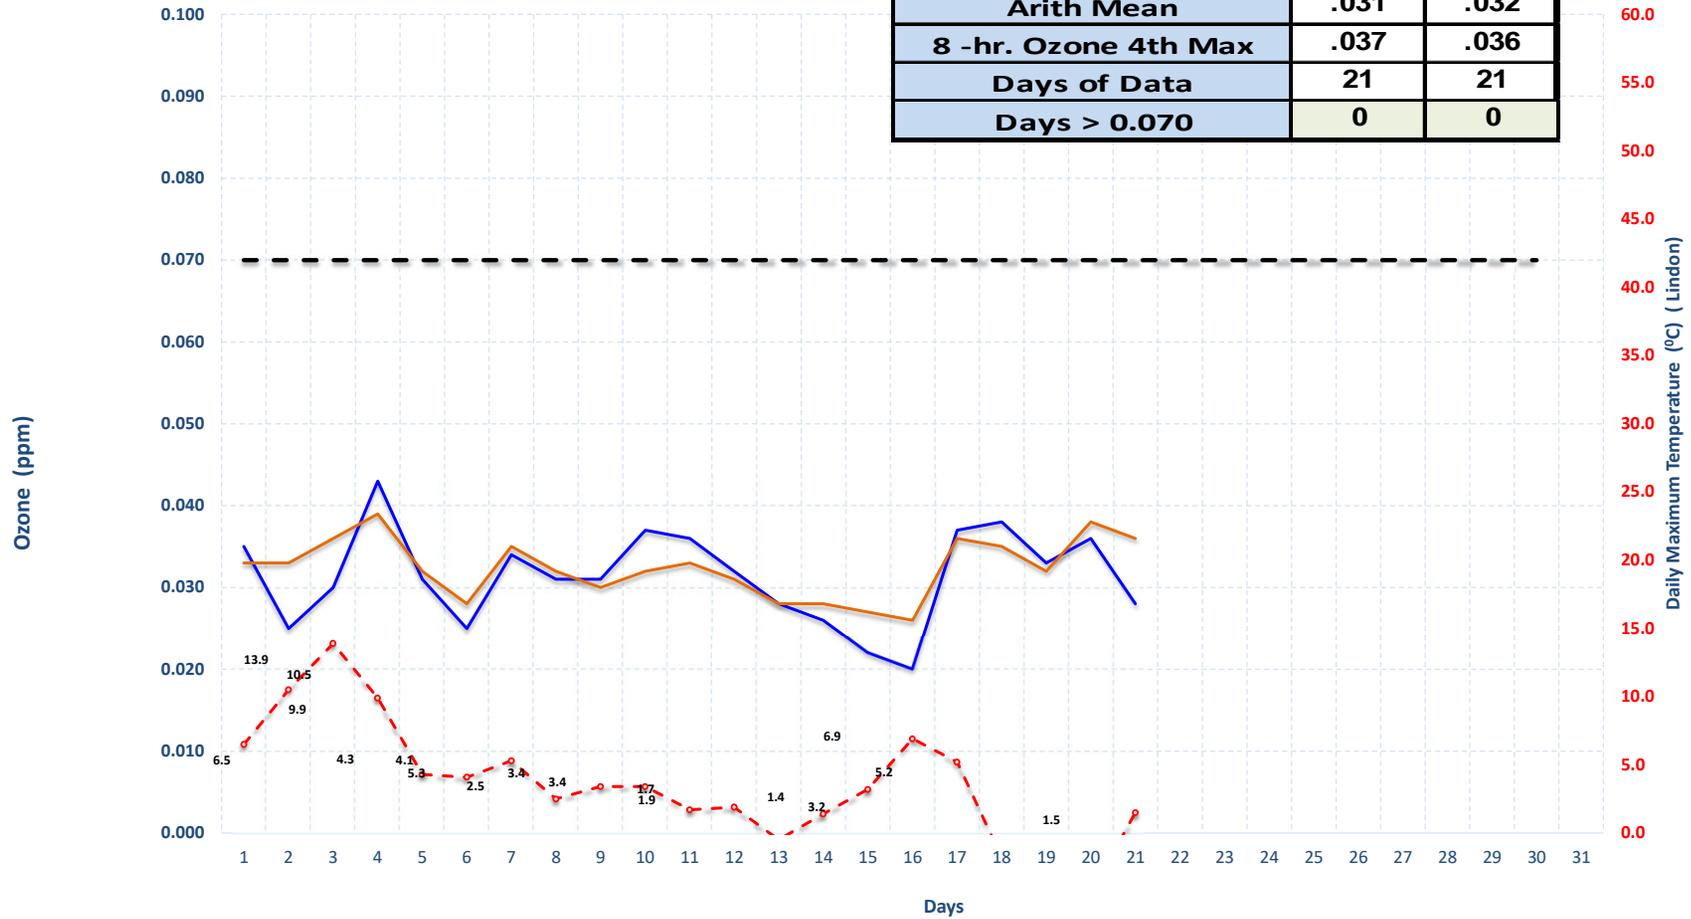


## Highest 8-hr Ozone Concentration and Daily Maximum Temperature January 2025

	EN	HC	M7
<b>Arith Mean</b>	<b>.036</b>	<b>.037</b>	<b>.036</b>
<b>8 -hr. Ozone 4th Max</b>	<b>.041</b>	<b>.043</b>	<b>.042</b>
<b>Days of Data</b>	<b>21</b>	<b>21</b>	<b>21</b>
<b>Days &gt; 0.070</b>	<b>0</b>	<b>0</b>	<b>0</b>

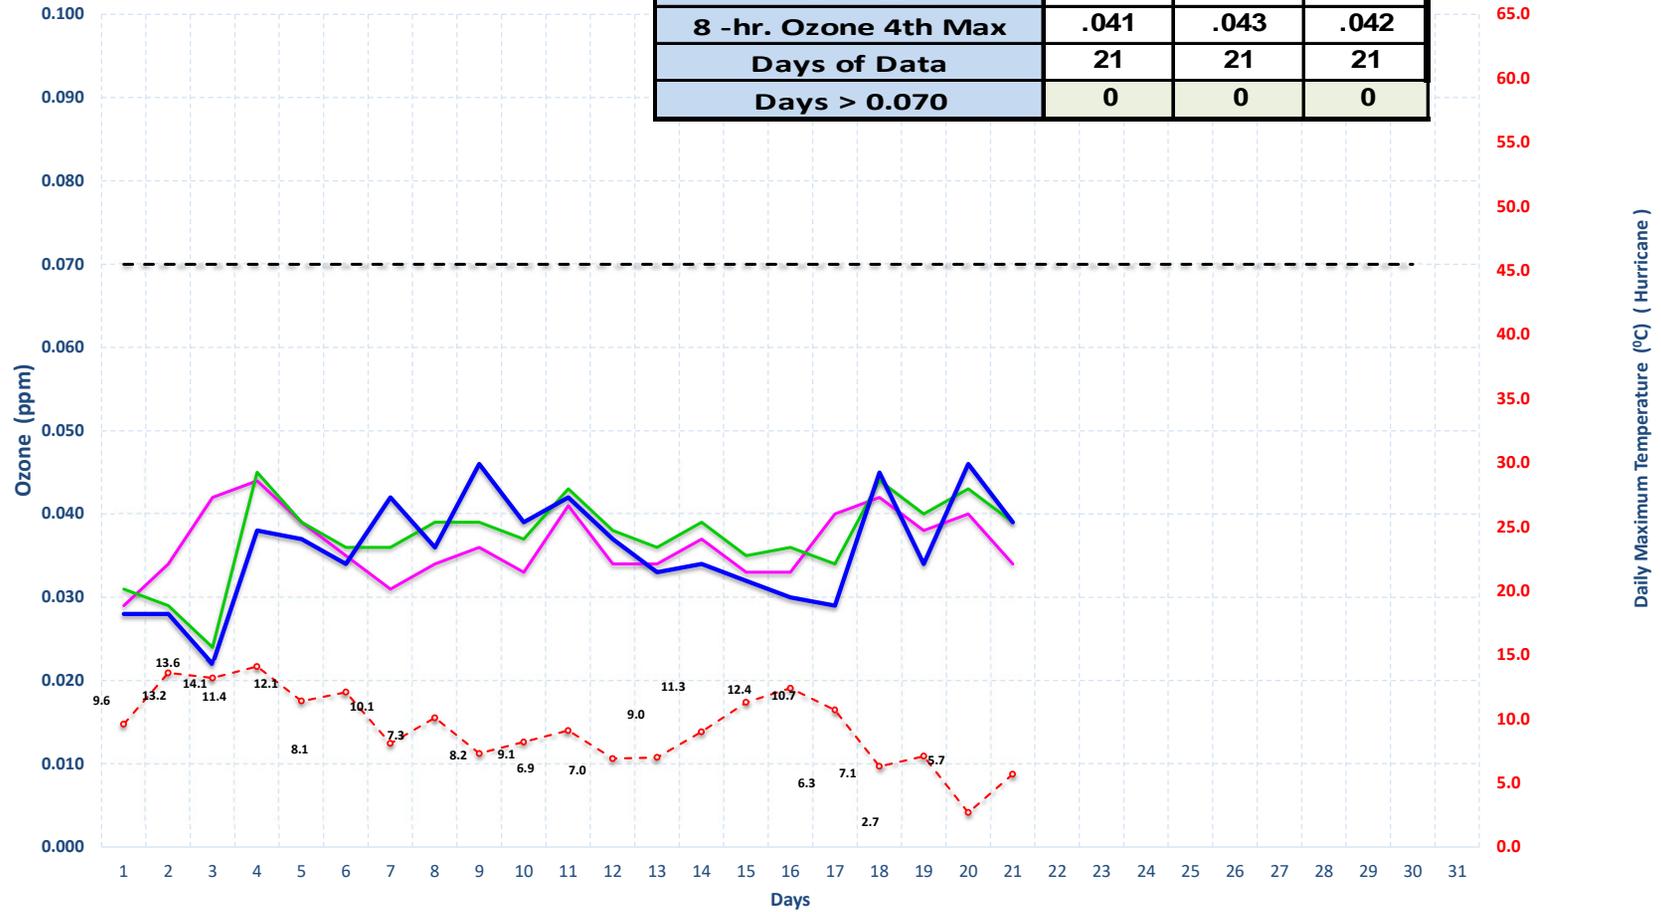

## Highest 8-hr Ozone Concentration and Daily Maximum Temperature January 2025 Stations Monitoring the Inland Port Development

	ZZ	LP
<b>Arith Mean</b>	<b>.035</b>	<b>.034</b>
<b>8 -hr. Ozone 4th Max</b>	<b>.041</b>	<b>.039</b>
<b>Days of Data</b>	<b>21</b>	<b>21</b>
<b>Days &gt; 0.070</b>	<b>0</b>	<b>0</b>

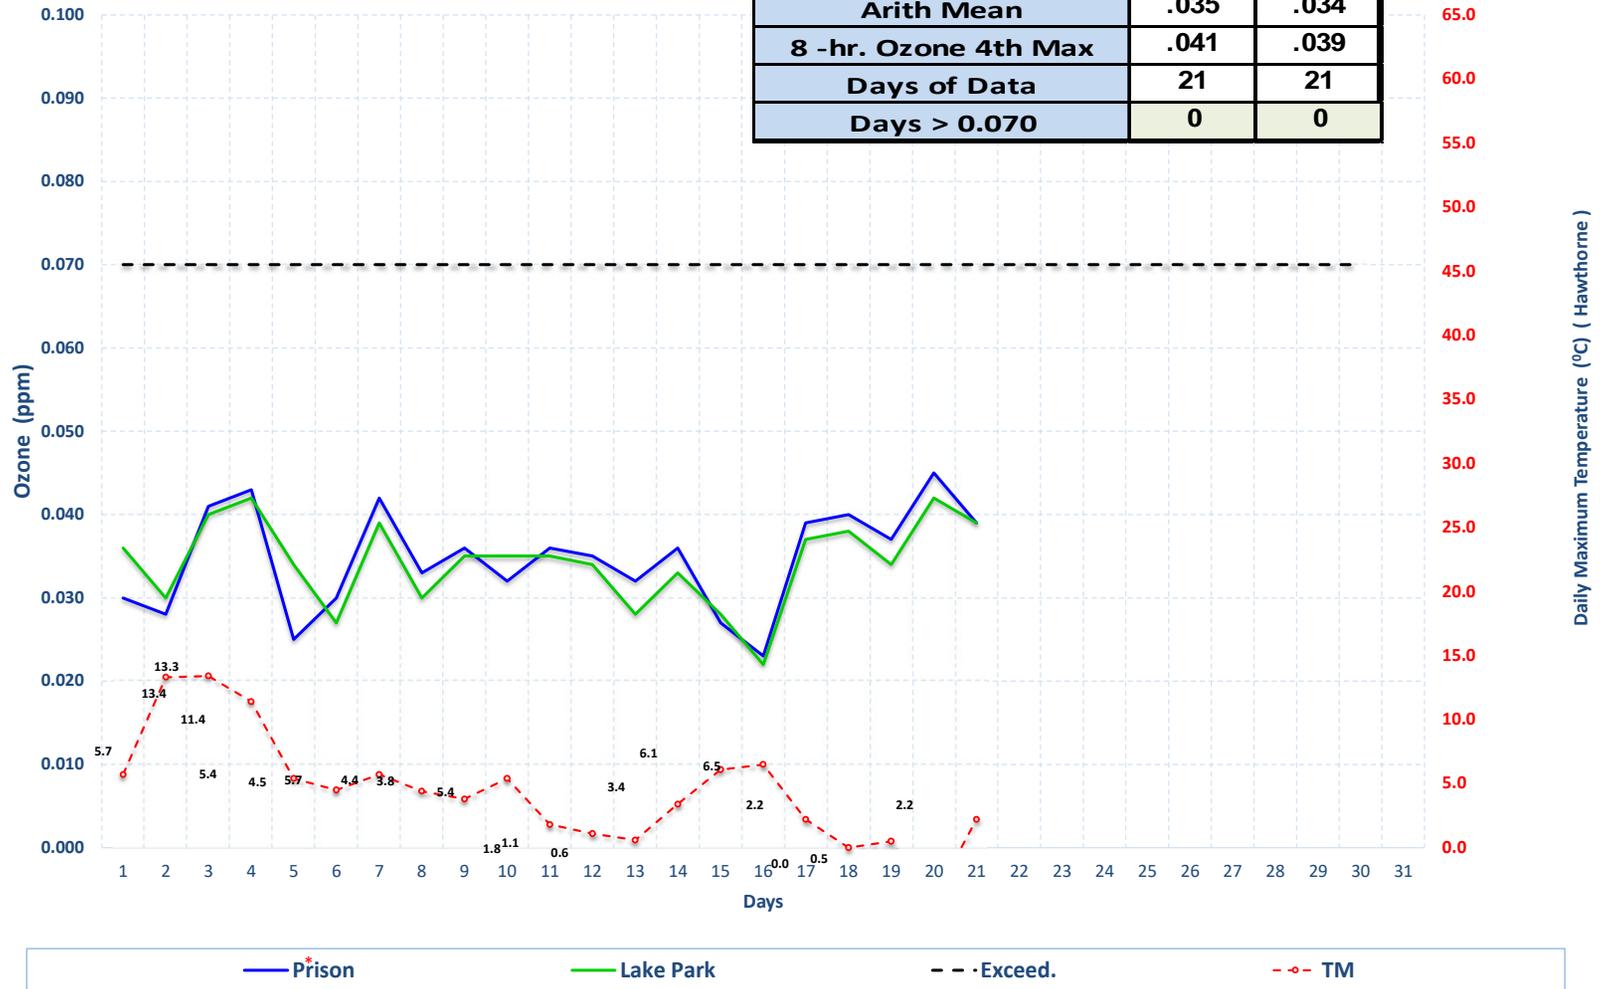

\* ZZ is located at the New Utah State Prison (1480 North 8000 West, SLC).  
This site was previously named IP

## Highest 8-hr Ozone Concentration and Daily Maximum Temperature January 2025

	<b>BG</b>
<b>Arith Mean</b>	<b>.034</b>
<b>8 -hr. Ozone 4th Max</b>	<b>.040</b>
<b>Days of Data</b>	<b>21</b>
<b>Days &gt; 0.070</b>	<b>0</b>

