

# 2025 CIP Projects

---

Scott Cooley

City Council  
December 2, 2025

# 2025 Pavement Maintenance - Completed

- Various Locations City Wide - Crack and Slurry Seal
- South Mountain Phase 9 – Reconstruction
- Draper Parkway Reconstruction.



# 700 East and Willow Springs Storm Drainage Improvements (2025) - Completed

- Relocating the storm drain outflow location at Willow Creek down stream to eliminate backflow from the creek into 700 East. Replace damaged asphalt from previous flooding.



# 13800 South Phase 3 Widening (2025) Completed

- Storm Drain, widening, road reconstruction,
- Extended Road reconstruction to 1300 East



# Suncrest Guardrail – Concrete Barrier (2025) - Completed

- Existing utilities prohibit installing typical guardrail. Installing Concrete Barrier




# Sidewalk Gap Project (2025) - Completed

- Connecting Sidewalk on Highland Drive between Traverse Ridge Road and 65 East.



# 700 West Drainage Improvements (2025) - Completed

- Install Storm Drain Improvements to improve existing flooding issues.

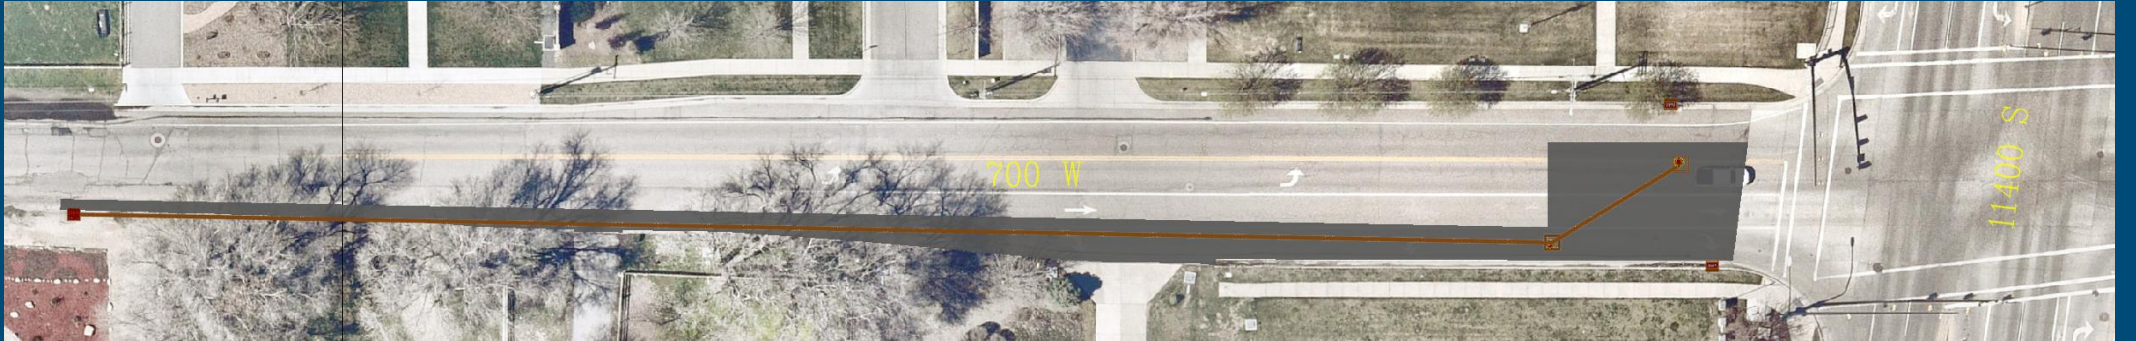


# 700 West Sidewalk Connections (Potential Project)

- Install Contiguous Sidewalk with Curb and Gutter.
  - Estimated Cost \$300,000.



- Install Sidewalk, Park Strip, Curb and Gutter.
  - Estimated Cost \$150,000.

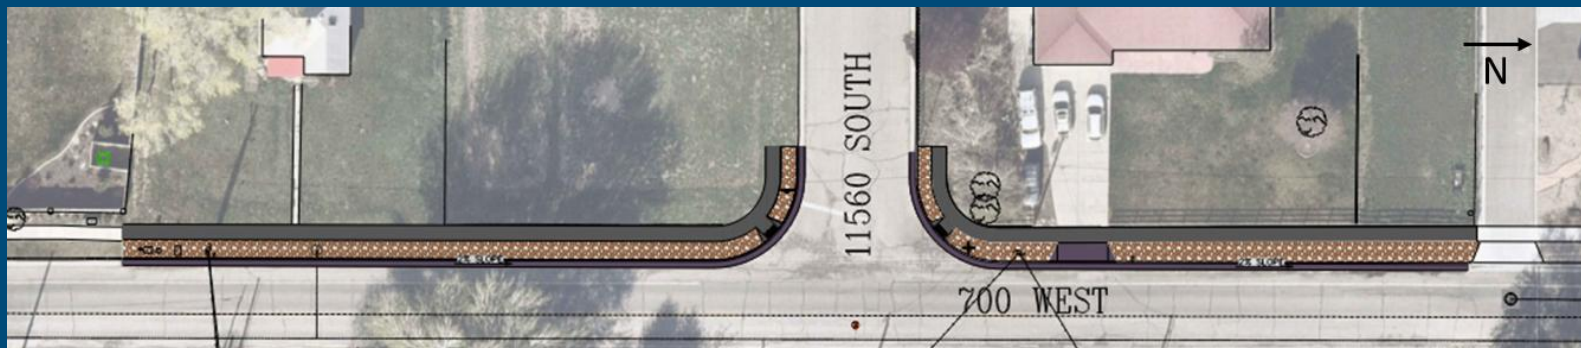



# Pump Station 3 Upgrades (2026)

- Adding additional pumps for capacity, per State requirements.
- Providing upgrades or repairs to;
  - Electrical Systems
  - Corrosion control
  - Lighting
  - Drainage
  - Surge Protection
  - Other minor items



# Zone 4 Sidewalk (2025-26)

- Sidewalk Repair in Zone 4.

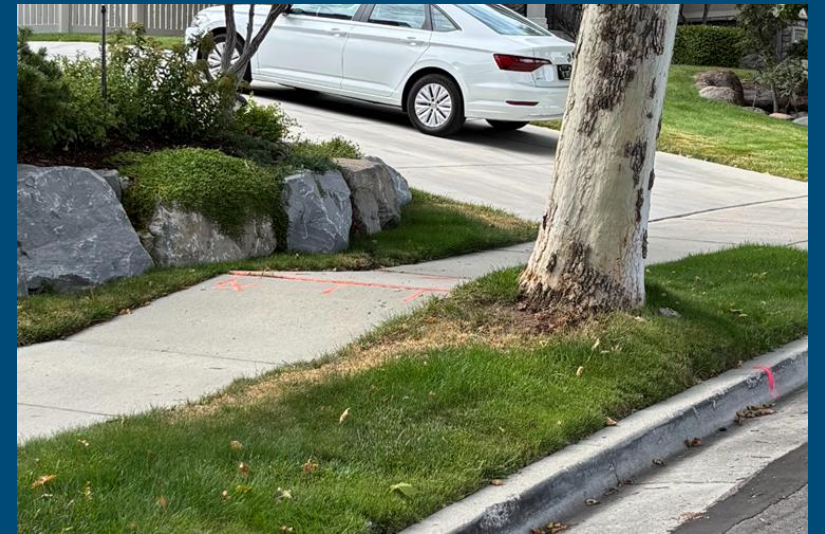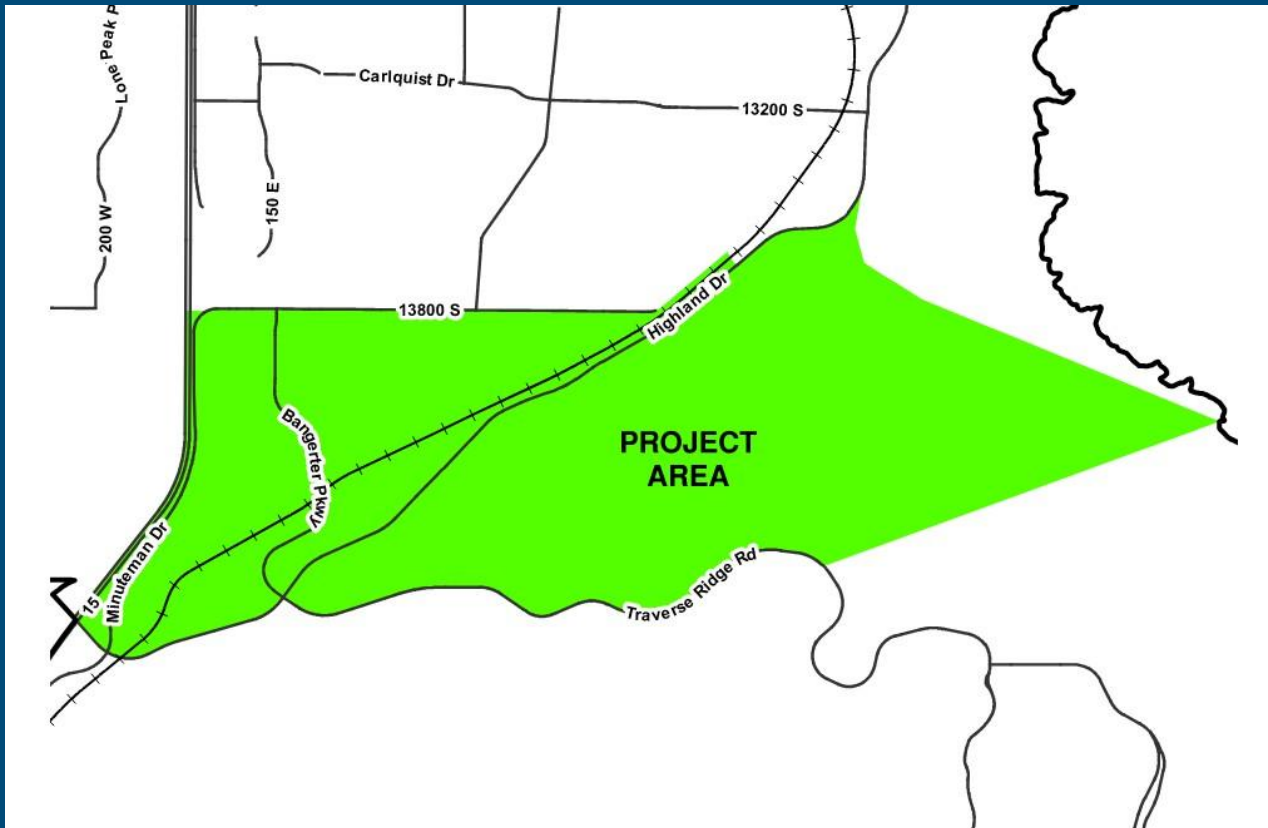

# 1700 East Storm Drain Improvement (2025 -2026)

- Providing 30,000 C.F. of storage and Increased pipe size.



# Lone Peak Parkway Widening

- Lone Peak Parkway Widening and Realignment, 12300 S to 12650 S
  - Partial Corridor preservation funds obtained, around \$850,000.00
  - \$3 Million in additional federal funding was secured.
  - Construction 2027.



# 146<sup>th</sup> S. Minuteman Intersection Improvements (2026)

- Provide dual turn lanes Northbound Left Turns.



# Pioneer Road Resurfacing (2026)

- Resurface Pioneer Road from 1300 East to 700 East
- Storm Drain Improvements
- Sidewalk, Curb, and Gutter connections



# 13400 South Connection (2026)

- Connection from Fort Street to 1300 East to improve redundancy
- Storm Drainage Improvements

